


OD8038-12HBXE10A



DC Fan, 12VDC
80x38mm (3.15"x 1.5")

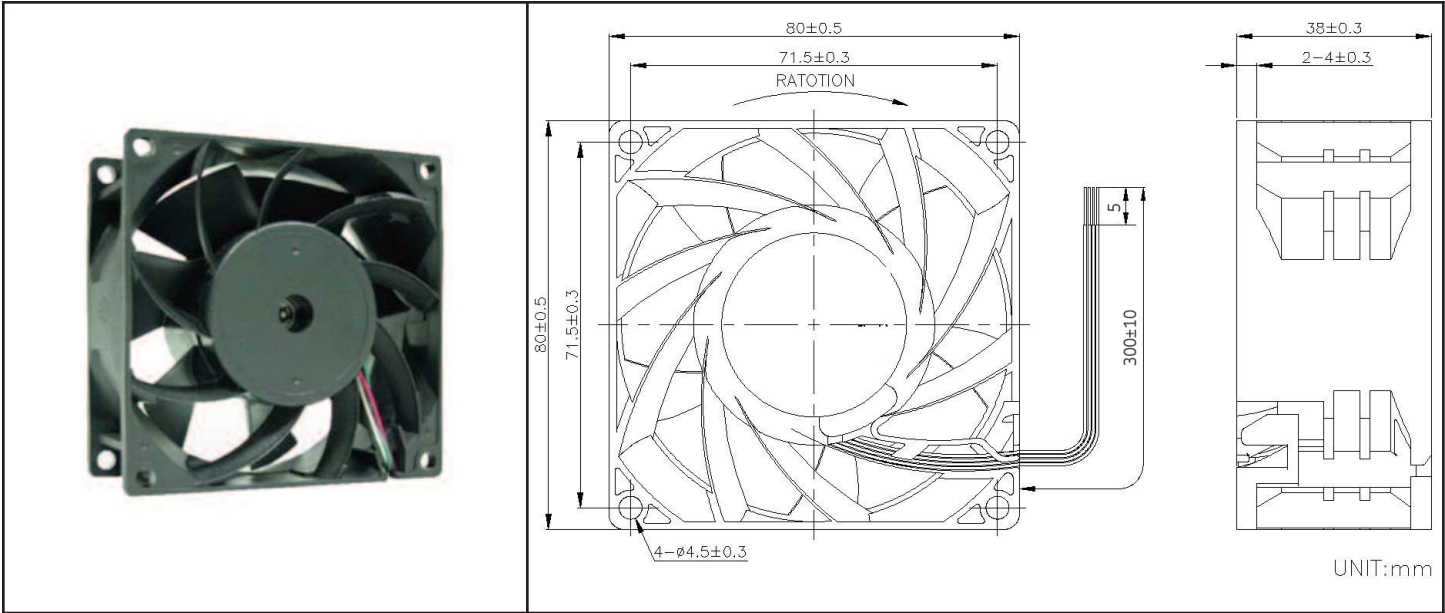


Frame & Impeller	PBT, UL94V-O plastic	<u>Available Options</u> ThermalControl * Connection: Wire Leads - UL1430, 24AWG Red(+), Black (-), White (tach), Blue (PWM) Weight: 219 g	
Connection	4x Lead wires *		
Motor	Brushless DC, auto restart, polarity protected.		
Bearing System	Dual ball bearing		
Insulation Resistance	Min. 10M at 500VDC		
Dielectric Strength	1 minute at 500VAC max leakage 500 microamp		
Temperature Range	-10C ~ +70C		
Storage Temperature	-40C ~ +80C		
Life (L10)	70,000 hours (40C)		

Model Number	OD8038-12HBXE10A
Part Number	189181261
Nominal Voltage	12 VDC
Voltage Range	8~13.2 VDC
Rated Current	4.10 A
Rated Power	49 Watts
Rated Speed (RPM)	13500
Airflow (CFM)	141
Noise Level (dB)	71
Max. Static Pressure	3.9 "H ₂ O

OD8038-48HBXE10A



DC Fan, 48VDC
80x38mm (3.15"x 1.5")

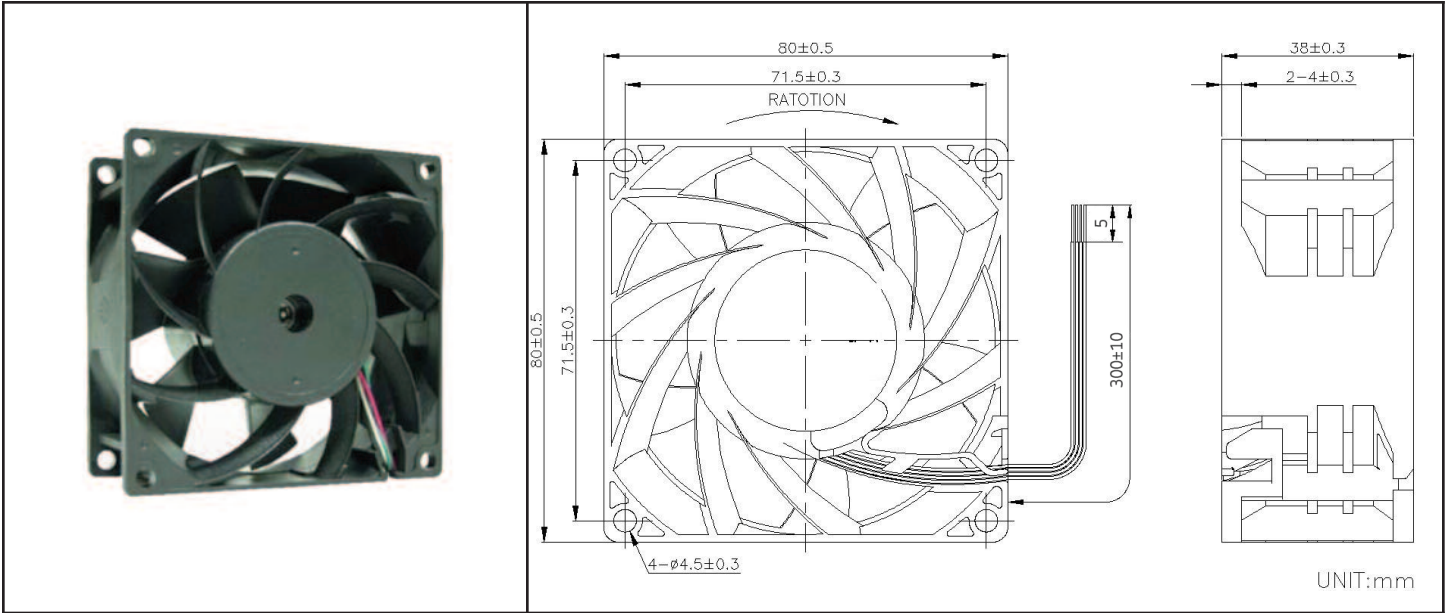

Frame & Impeller	PBT, UL94V-O plastic	<u>Available Options</u> ThermalControl * Connection: Wire Leads - UL1430, 24AWG Red(+), Black (-), White (tach), Blue (PWM) Weight: 219 g	
Connection	4x Lead wires *		
Motor	Brushless DC, auto restart, polarity protected.		
Bearing System	Dual ball bearing		
Insulation Resistance	Min. 10M at 500VDC		
Dielectric Strength	1 minute at 500VAC max leakage 500 microamp		
Temperature Range	-10C ~ +70C		
Storage Temperature	-40C ~ +80C		
Life (L10)	70,000 hours (40C)		

Model Number	OD8038-48HBXE10A
Part Number	189481261
Nominal Voltage	48 VDC
Voltage Range	28 ~56 VDC
Rated Current	1.14 A
Rated Power	55 Watts
Rated Speed (RPM)	13500
Airflow (CFM)	141
Noise Level (dB)	71
Max. Static Pressure	3.9 "H ₂ O