MODEL NO.	PACKAGING
134-1010-002	ONE PCS PER BAG

REV	ECO	DATE
001	ECO-17-0032	11/28/2017
002	ECO-18-0020	08/21/2018

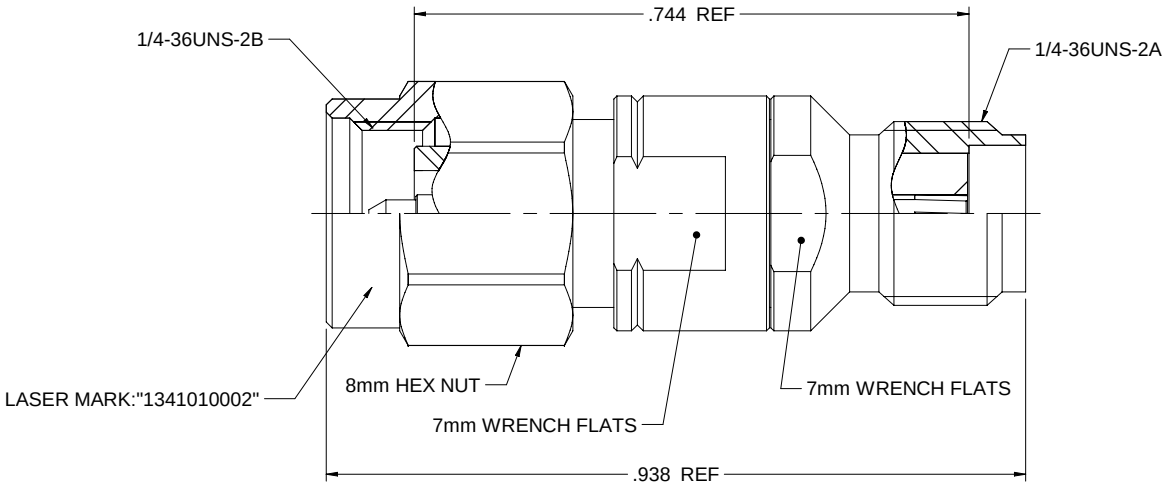

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
   1.1 BODY & SHELL: PASSIVATED STAINLESS STEEL
   1.2 CONTACT PIN: GOLD PLATED BERYLLIUM COPPER
   1.3 INSULATOR: PTFE WHITE
   1.4 C RING: BERYLLIUM COPPER
   1.5 GASKET: SILICONE RED

2. ELECTRICAL:
   2.1 IMPEDANCE: 50 OHMS
   2.2 FREQUENCY RANGE: DC-26.5 GHz
   2.3 VOLTAGE STANDING WAVE RATIO: 1.3 MAX
   2.4 DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS MIN
   2.5 CONTACT RESISTANCE:
      2.5.1 CENTER CONTACT: 3 MILLIOHM MAX
      2.5.2 OUTER CONTACT: 2 MILLIOHM MAX
   2.6 INSULATOR RESISTANCE: 5000 MEGOHM MIN

3. MECHANICAL:
   3.1 ENGAGEMENT / DISENGAGEMENT FORCE: 2 IN-LBS. MAX
   3.2 COUPLING NUT RETENTION: 60 LBS. MIN
   3.3 COUPLING PROOF TORQUE: 15 IN-LBS. MIN
   3.4 CONTACT RETENTION: 6 LBS MIN
   3.5 DURABILITY: 500 CYCLES MIN

4. ENVIRONMENT:
   4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
   4.2 OPERATING TEMPERATURE: -65 TO 165°C
   4.3 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
   4.4 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
   4.5 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

cinch
This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is proprietary and confidential, and shall not be used, or reproduced without written permission. ACCEPTANCE OF DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

Model No. 134-1010-002		Johnson	
RoHS2 ☑ 2011/65/EU	Cage Code	Title: ADAPTER ASSEMBLY,2.92mm(SMK) PLUG TO SMA JACK	
UNLESS OTHERWISE SPECIFIED UNITS INCH .XXX ±.02 .XXXX ±.01 ANGLES ±5°	3RD ANGLE PROJECTION	Drawing No. 134-1010-002	Rev. 002
	Drawn by: Betty.Yu		
	Date: 08/21/2018	Size C / DO NOT SCALE DRAWING / Workmanship Std NONE	Sheet 1 of 1