

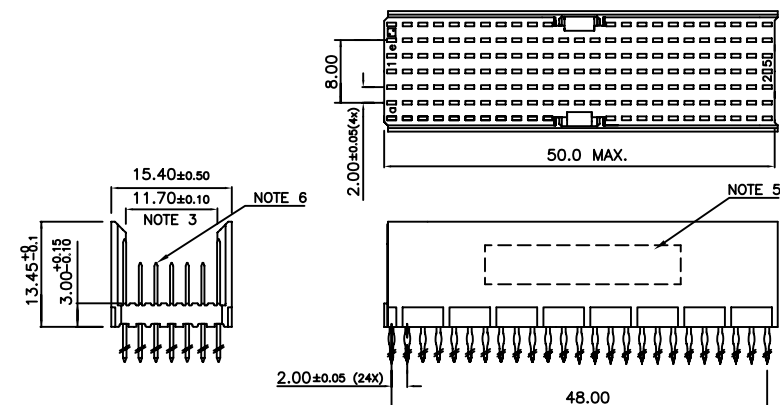


LOADED CONNECTOR ASSEMBLY
(FOR EXAMPLE)

f	6	6	6	6	6	6	6	6	6	6				6	6	6	6	6	6	6	6	6	6
e	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
d	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
c	4	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
b	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
a	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
z	6	6	6	6	6	6	6	6	6	6				6	6	6	6	6	6	6	6	6	6
P O S	0 1				0 5					1 0				1 5					2 0				2 5

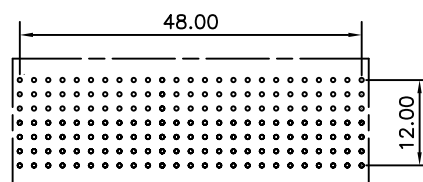

LAY-OUT P.C.B.-HOLE

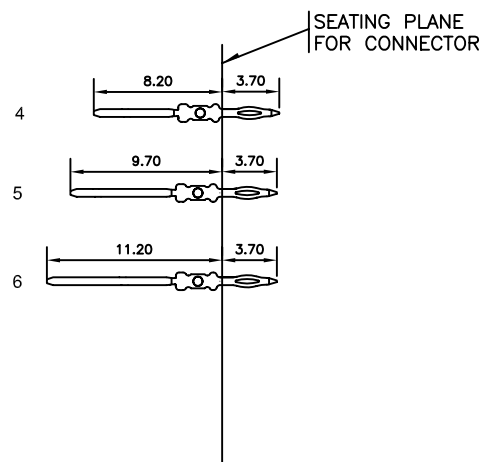

HM2P65PDK311

LEAD FREE INDICATOR : LF = LEAD FREE
(DIGIT 15 & 16)

PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

1. THIS PRODUCT IS CSA APPROVED.
 2. THIS PRODUCT IS UL RECOGNIZED.
 3. MEASURED AT THE BOTTOM.
 4. MATERIAL CONTACT: PHOSPHORBRONZE
HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
 5. CONNECTOR PRINTED WITH P/N AND DATE CODE.
 6. FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
 7. SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON
PRODUCTION LOCATION
 8. THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-22-008
 9. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001
- CATALOG NO: HM2P65PDK311----

mat'l. code SEE NOTE 4				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family MILLIPACS			
ltr	ecn no	dr	date	tolerances unless otherwise specified						title			
A	107-0048	AB	2007-04-09	angles	linear	0±0.2				MPACS 5+2R STR HDR PF CONN TYPE AB			
						.00±0.1							
				0°±1°				scale —					
				dr	ALEX BABU	2007-04-09				dwg no		sheet 1 of 1	size
				engr	BIJU K PAUL	2007-04-09				BS, C ,203028, 764		A3	
				chr	BIJU K PAUL	2007-04-09							
				appd	BIJU K PAUL	2007-04-09							
sheet index		revision sheet		A	1								