



D

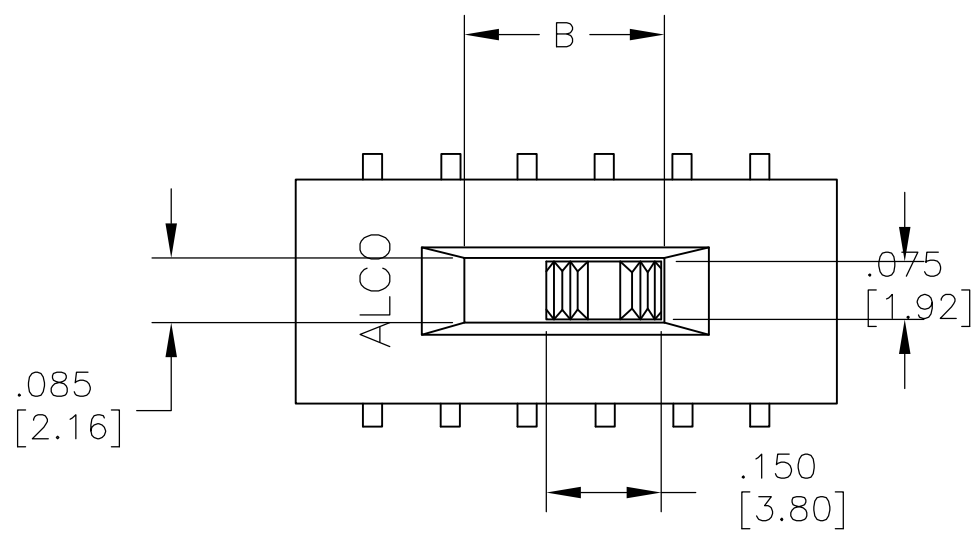


* SIDE ACTUATOR ONLY.

DOTTED LINE INDICATES
SIDE ACTUATOR

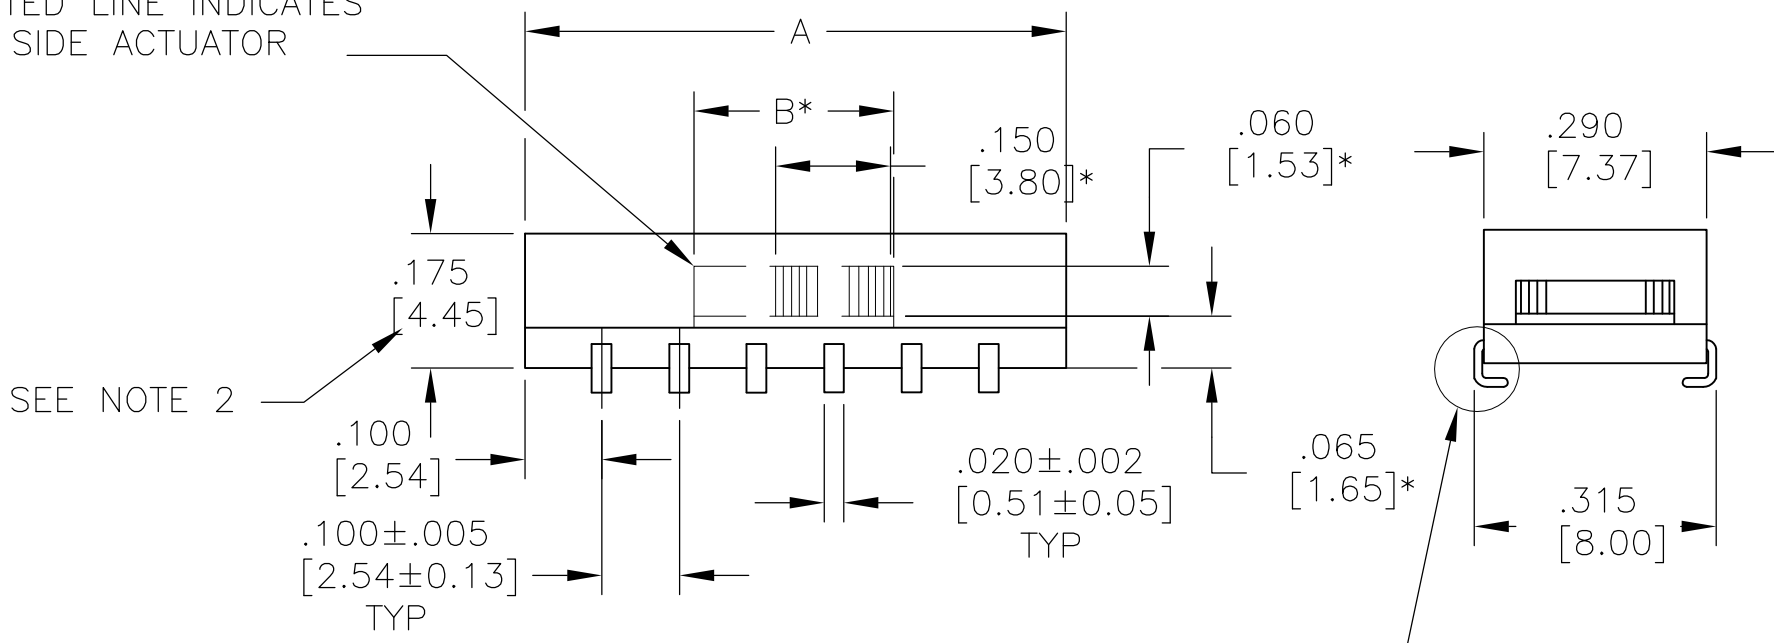


ASE

SEE NOTE A

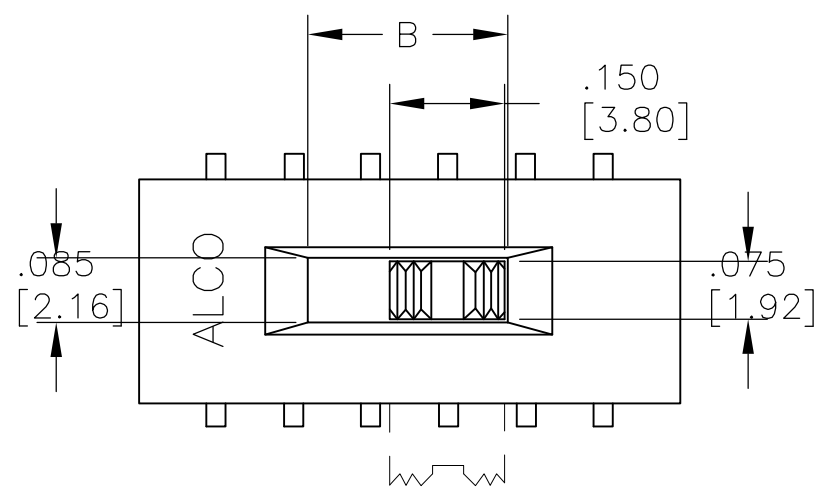

* SIDE ACTUATOR ONLY.

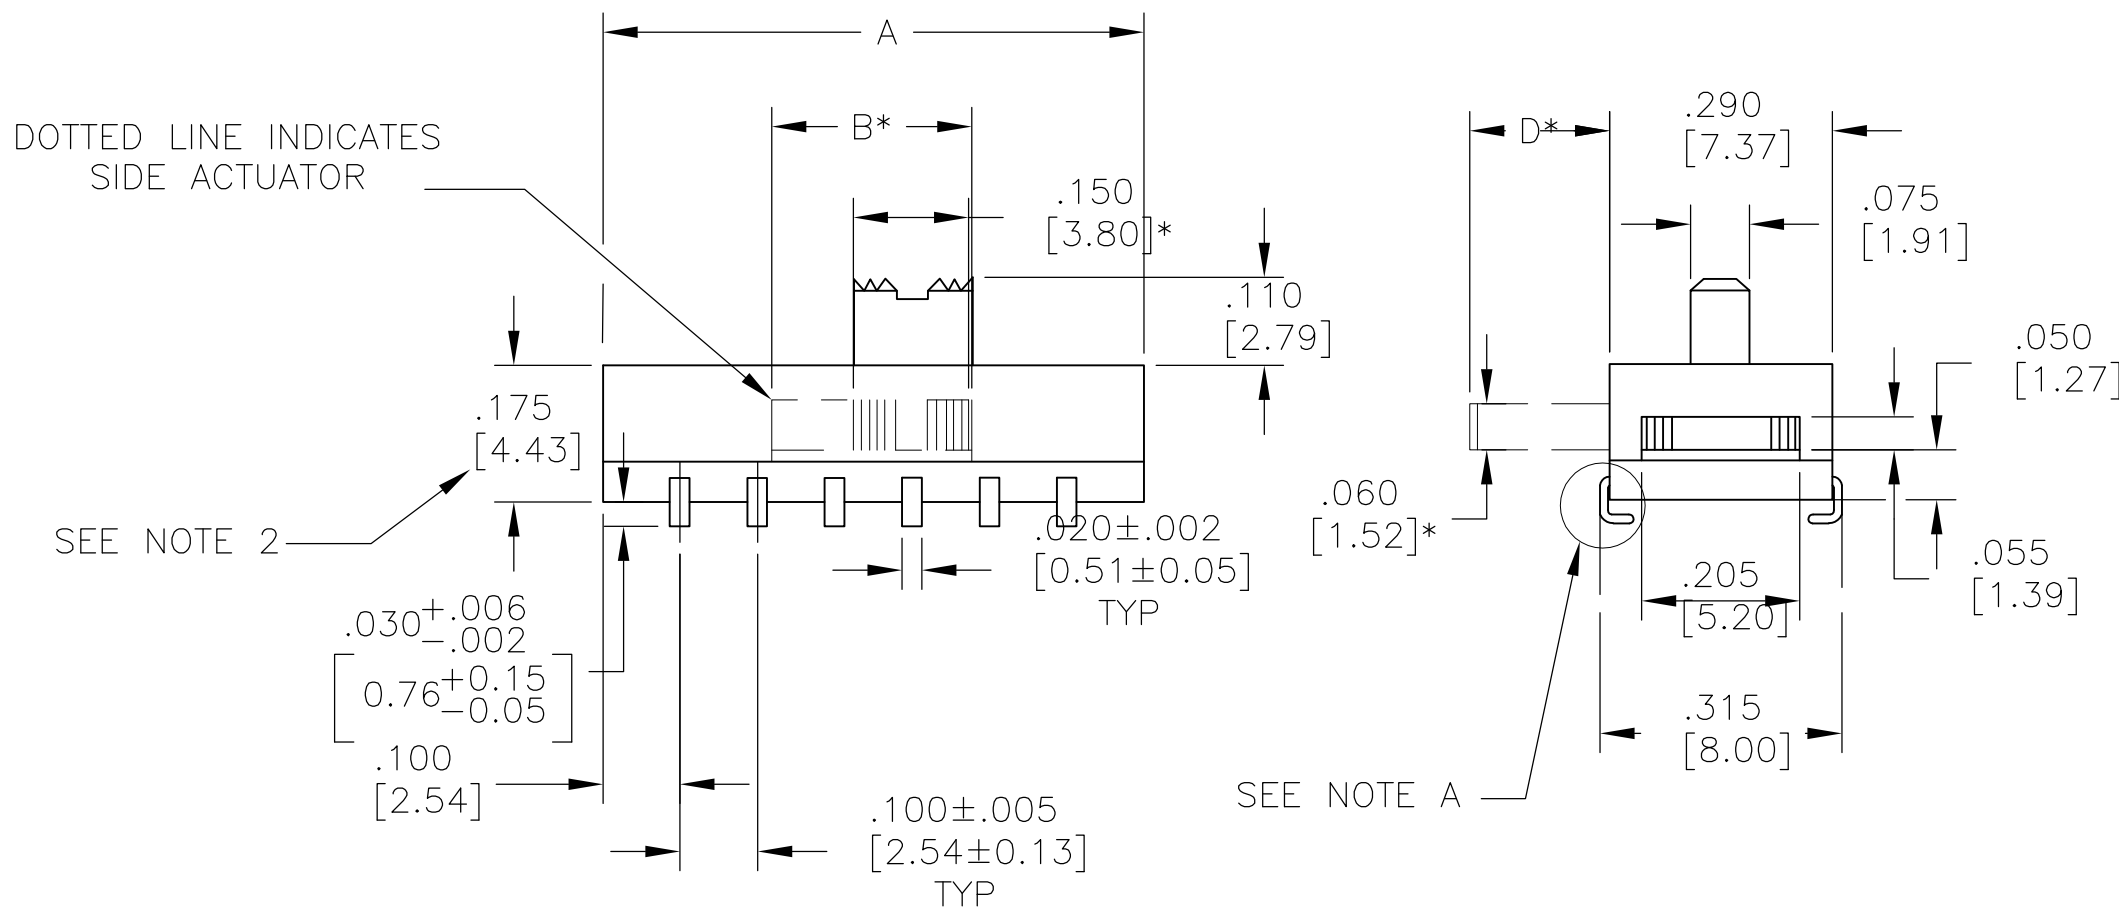


ASE

SEE NOTE A


DOTTED LINE INDICATES
SIDE ACTUATOR

SEE NOTE 2

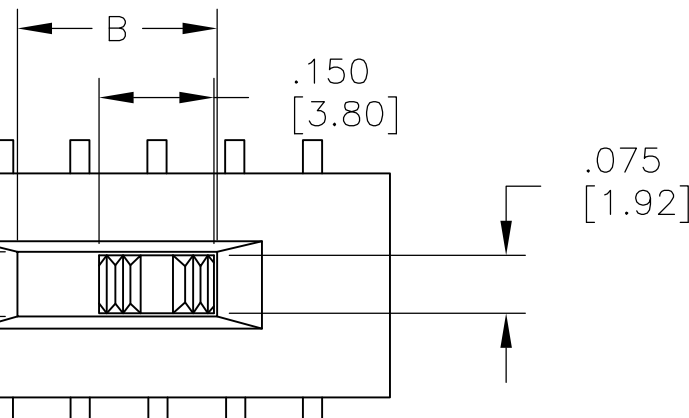


* SIDE ACTUATOR ONLY.

DOTTED LINE INDICATES
SIDE ACTUATOR

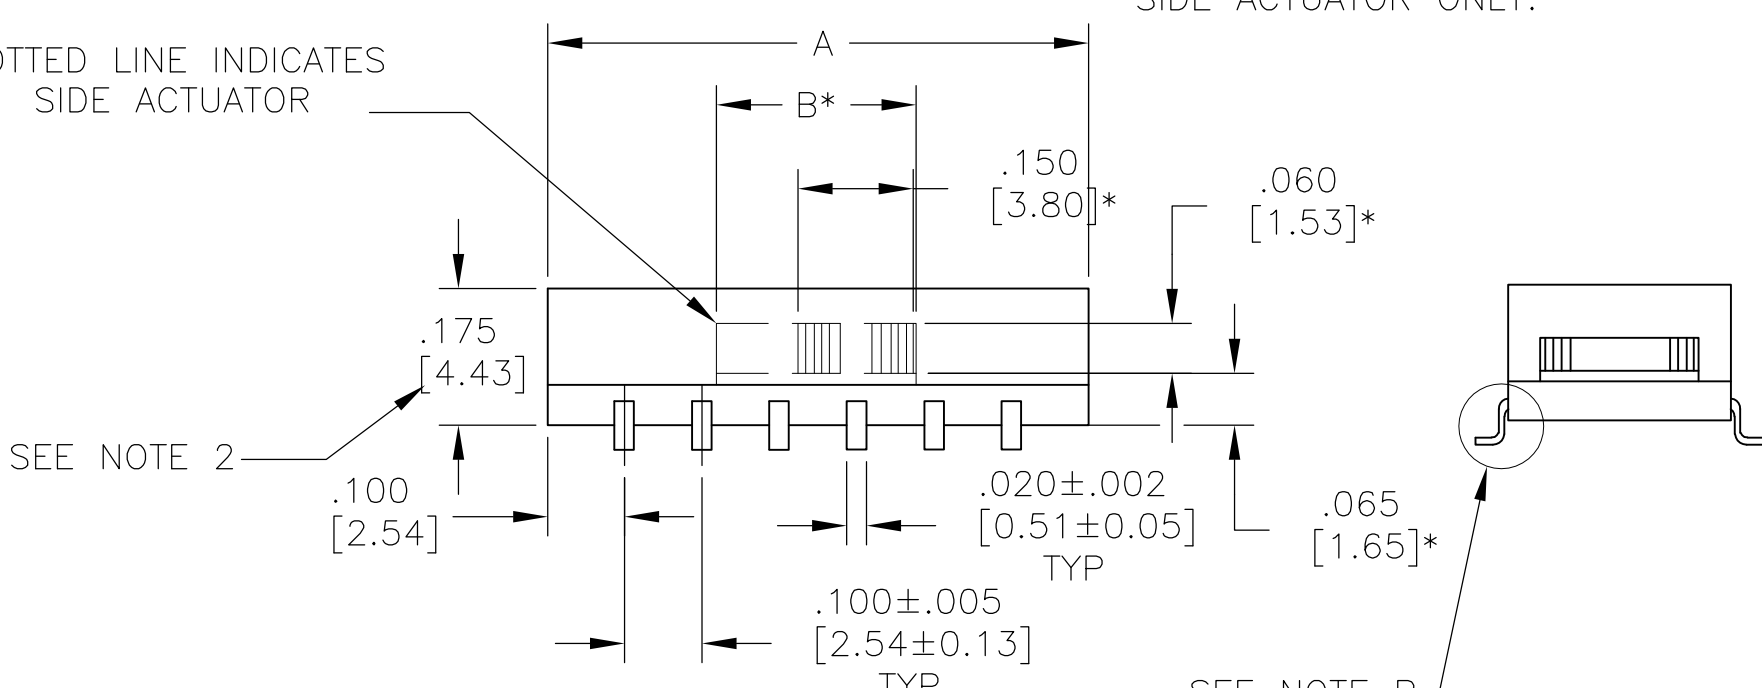

ASF


SEE NOTE B

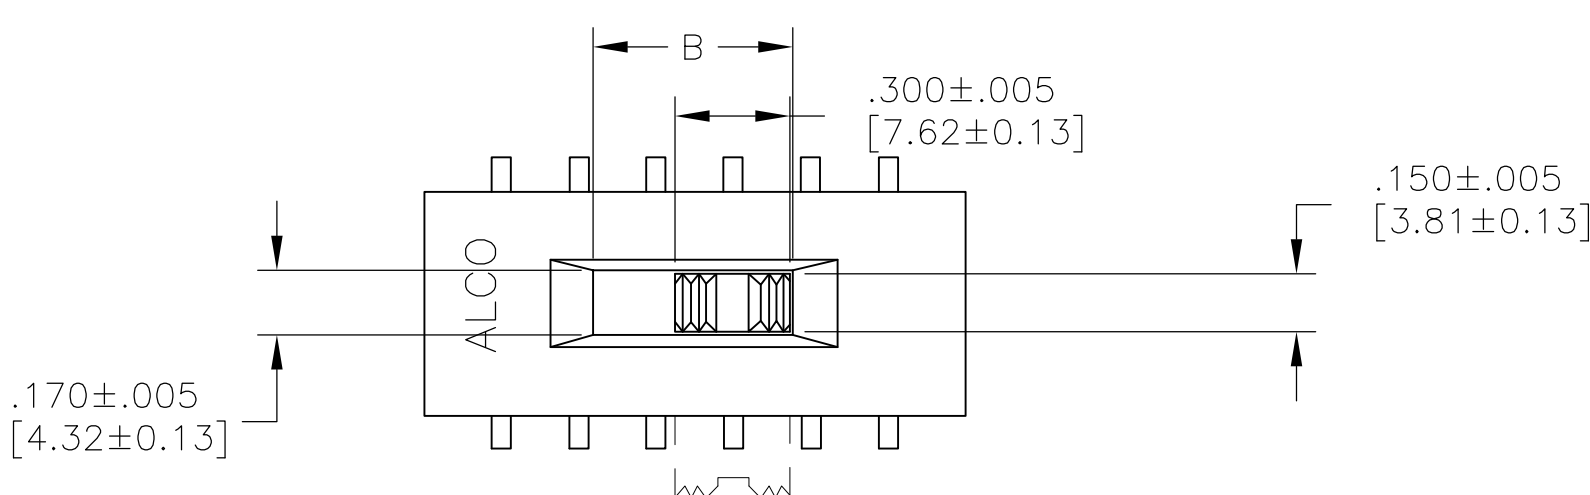

* SIDE ACTUATOR ONLY.



DOTTED LINE INDICATES
SIDE ACTUATOR

SEE NOTE 2

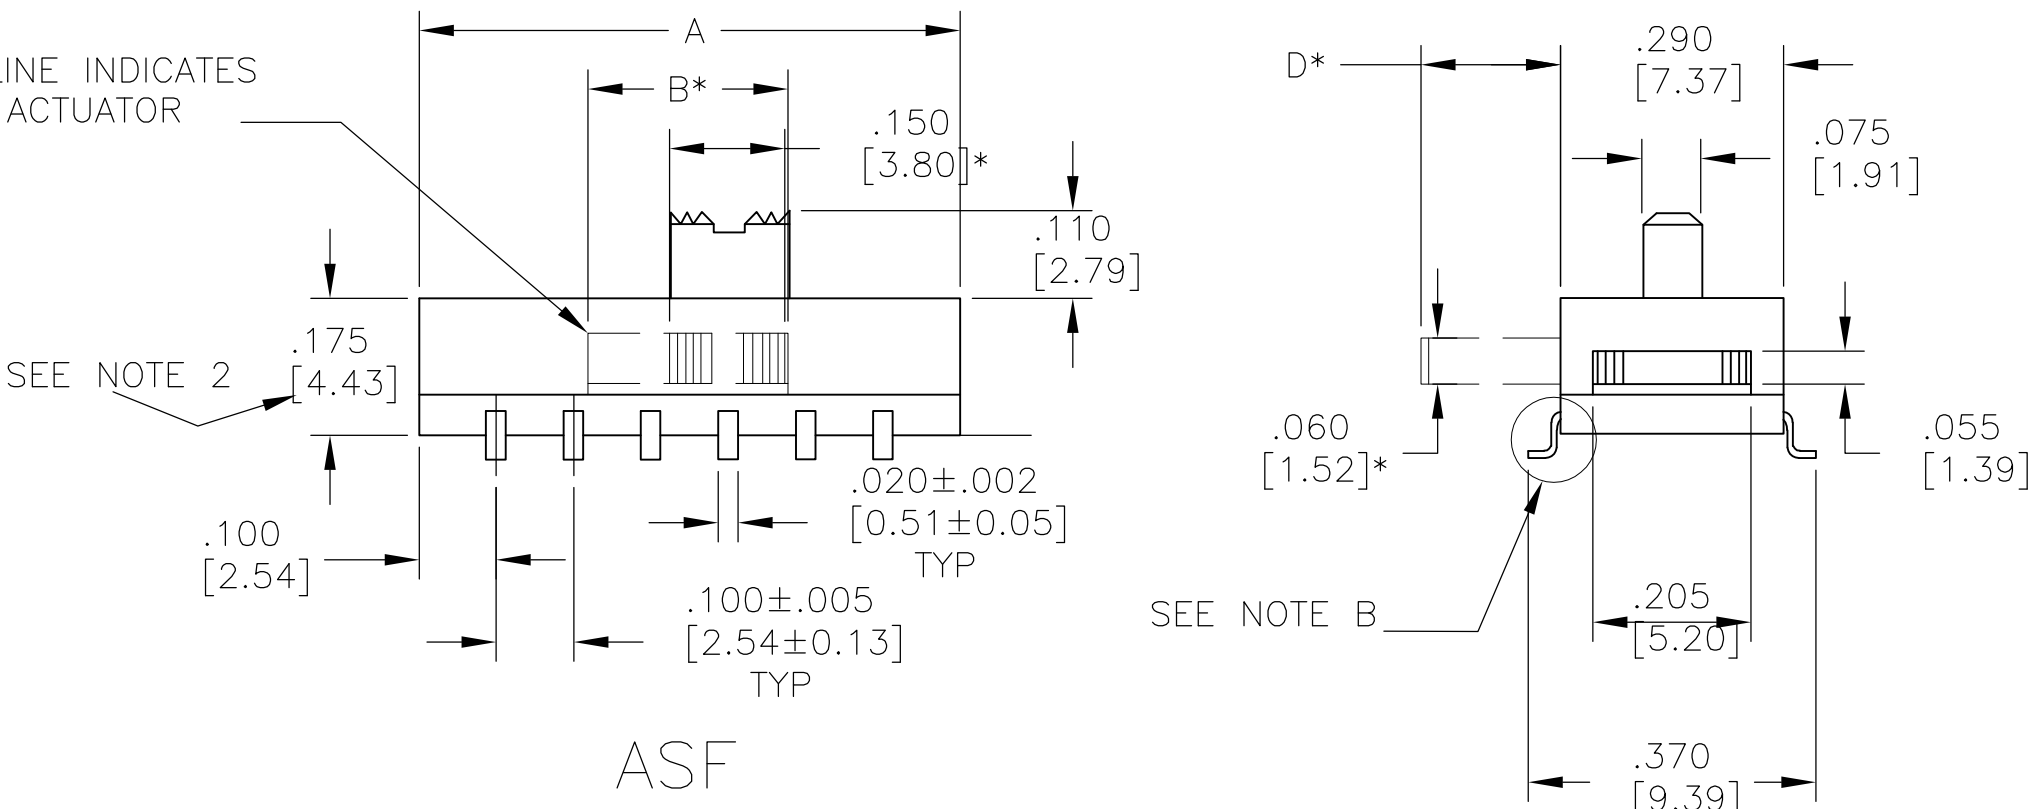

ASF

SEE NOTE B

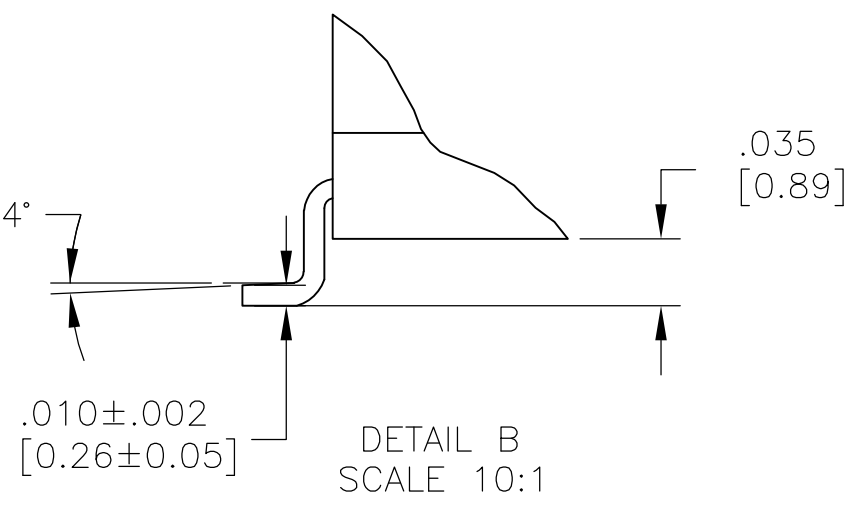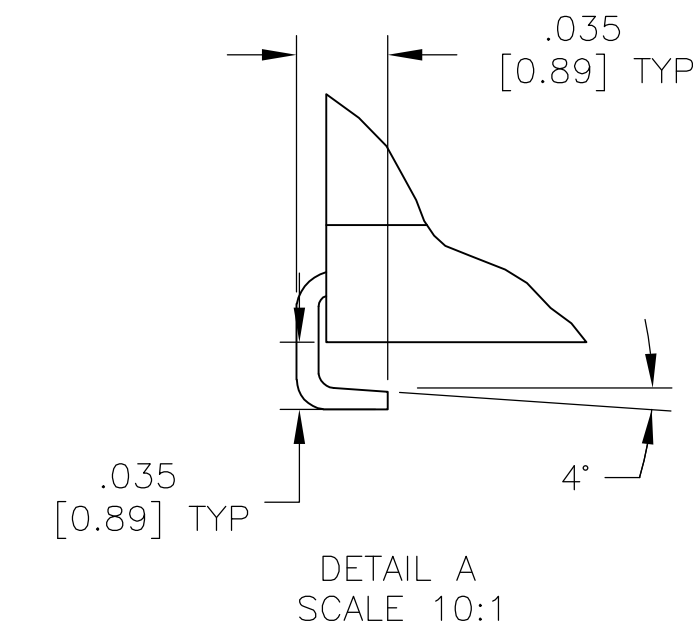

B

"L" TYPE SURFACE MOUNT

A

REVERSE "L" TYPE SURFACE MOUNT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER	12JAN04	TE Connectivity	
DIMENSIONS: INCHES [mm]		CHK —	—		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	SLIDE SWITCH ASE/ASF, AUTO-INSERTABLE, THRU-HOLE AND SURFACE MOUNT	
	0. PLC ± .010		PRODUCT SPEC		
	1. PLC ± .010		APPLICATION SPEC		
	2. PLC ± .010		—		
MATERIAL SEE SPECIFICATIONS		FINISH —	WEIGHT —	SIZE A1	CAGE CODE 00779
		DRAWING NO 1437581-2		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 4:1	SHEET 2 OF 2
				REV K2	