


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

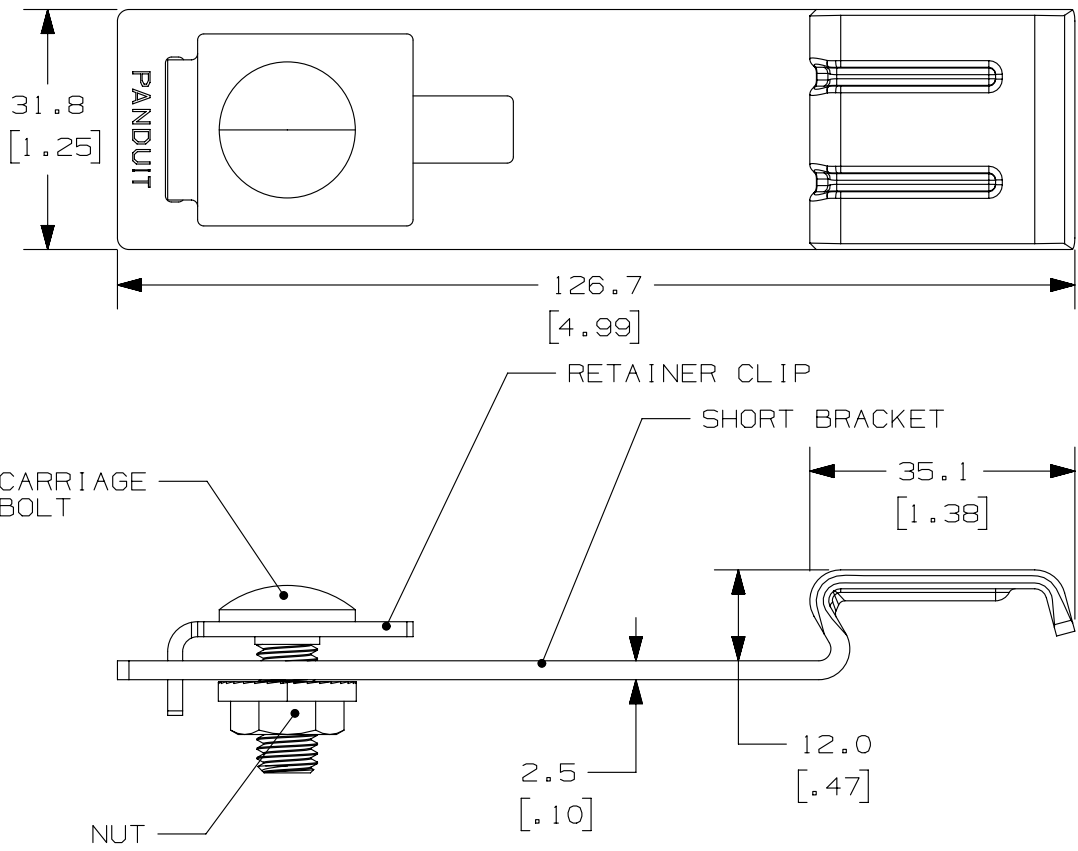

PANDUIT P/N	MATERIAL	WEIGHT / PC
UCTH1-V316	316 STAINLESS STEEL	106.0 g [.234 lbs]
UCTH1-VC	COMMERCIAL STEEL / GALVANIZED	109.5 g [.241 lbs]

NOTES:

1. PRIMARY DIMENSIONS IN METRIC (mm). DIMENSIONS IN [] ARE ENGLISH [in].
2. THIS PRODUCT INTENDED FOR USE WITH TOP-HAT TYPE LADDER RACK IN GALVANIZED STEEL, STAINLESS STEEL, OR ALUMINUM CONSTRUCTIONS.
3. ADJUSTABLE TO 3 POSITIONS TO ACCOMMODATE TOP-HAT WIDTHS AS FOLLOWS:
 - 38mm - 48mm [1.5" - 1.9"]
 - 48mm - 57mm [1.9" - 2.3"]
 - 57mm - 66mm [2.3" - 2.6"]
4. EACH ASSEMBLY INCLUDES:
 - (1) SHORT BRACKET PIECE
 - (1) RETAINER CLIP
 - (1) M8 X 1.25 X 20mm CARRIAGE BOLT
 - (1) SERRATED-FLANGE HEX NUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
-	-----	----	----	----	RELEASED TO PRODUCTION	-----
1	06-12-14	RMHI	RMHI	RGRO	B. UPDATED WEIGHTS IN TABLE A. REVISED TITLE	12L025AU-DC
R	04-30-14	JBN	RMHI		DRAWING RELEASED	

TITLE		UNICLIP TOP HAT BRACKET UCTH1		CUSTOMER DRAWING	
ITEM REVISION NAME		12L025AU/03		PANDUIT	
DATASET FILE NAME		12L025AU_DC/03B			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		.x ± .3 [.01] .xxx ± .127 [.005]		MATERIAL:	
.xx ± .25 [.010] ANGLES ± 5°		THIRD ANGLE PROJECTION		SEE CHART	
DRAWN BY		DATE		DRAWING NUMBER:	
JBN		04-30-14		12L025AU-DC	
CHK		SCALE		SHT 1 OF 1	
RMHI		N.T.S.		A	