









1		2		3		4		5		6		7		8	
REV.		ECN NO.		DATE		SIGN		DESCRIPTION							
B		LF3-850097		2008/05/14		Rex		LED Pin Add Shrink Tube							
C		LEN-930480		2009/03/04		ZhaoRongFu		Add Waterproof Rate							

</

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

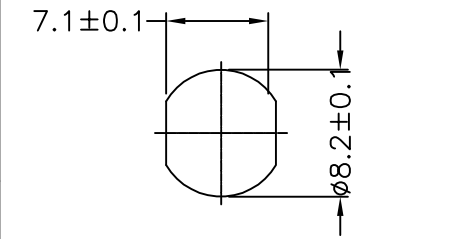

Recommended Panel Cut-Out

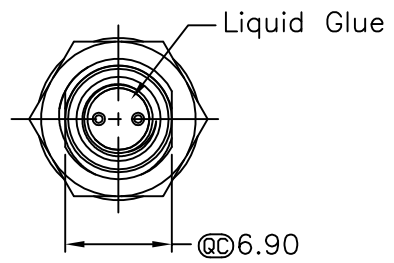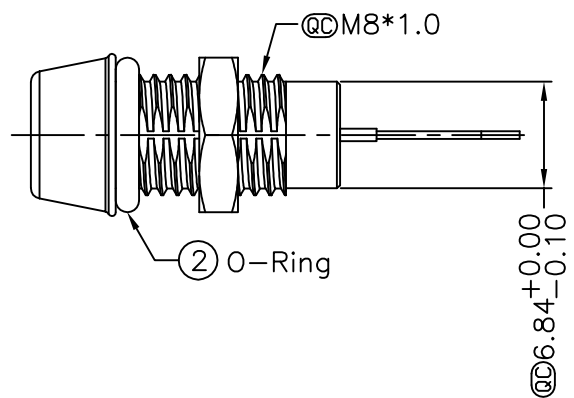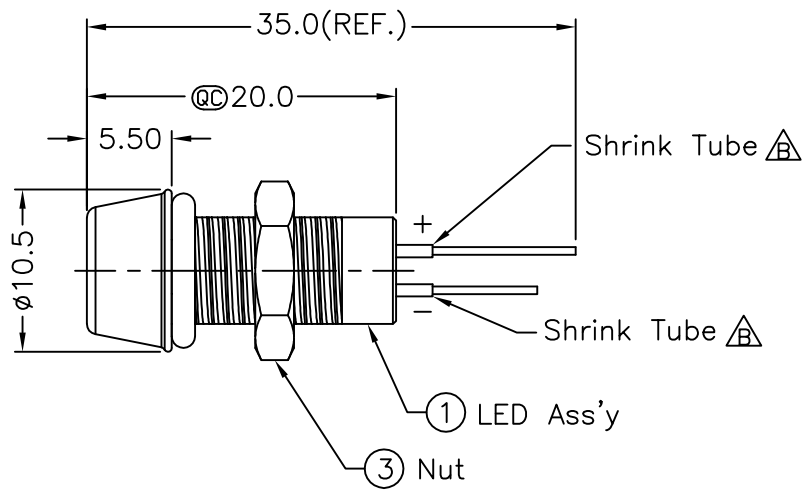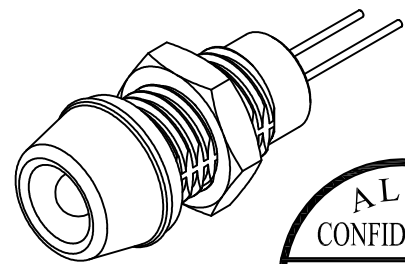

Notes:

- * QC Important Dimension To Check
- * Waterproof Rate: IP67
- * LED Holder: Brass, Nickel Plating
- * LED: Ø3 mm, Yellow (高亮度)
- * Gasket: EPDM, Black
- * Screw Nut: Brass, Nickel Plating
- * Operating Voltage: DC 4V
- * Operating Temperature: -40~+80°C
- * For Panel Thickness 6.5mm Max.

UNIT:mm	
TOLERANCE	.X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°

TITLE Waterproof Led (Ø3mm) Yellow, Solder Type			
SCALE	Free	SHEET	1 OF 1
REV.	C	SIZE	A4
QC : Inspection Item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	L08-01YAAS-MR7001
DWG NO	L08-01YAAS-MR7001
CUSTOMER	ALTW

DRAWN BY	Zhao Rong Fu
CHECKED BY	Prune
APPROVED BY	LUKE

DATE	2009/03/04
DATE	2009/03/05
DATE	2009/03/05