


FACE VIEW - FEMALE

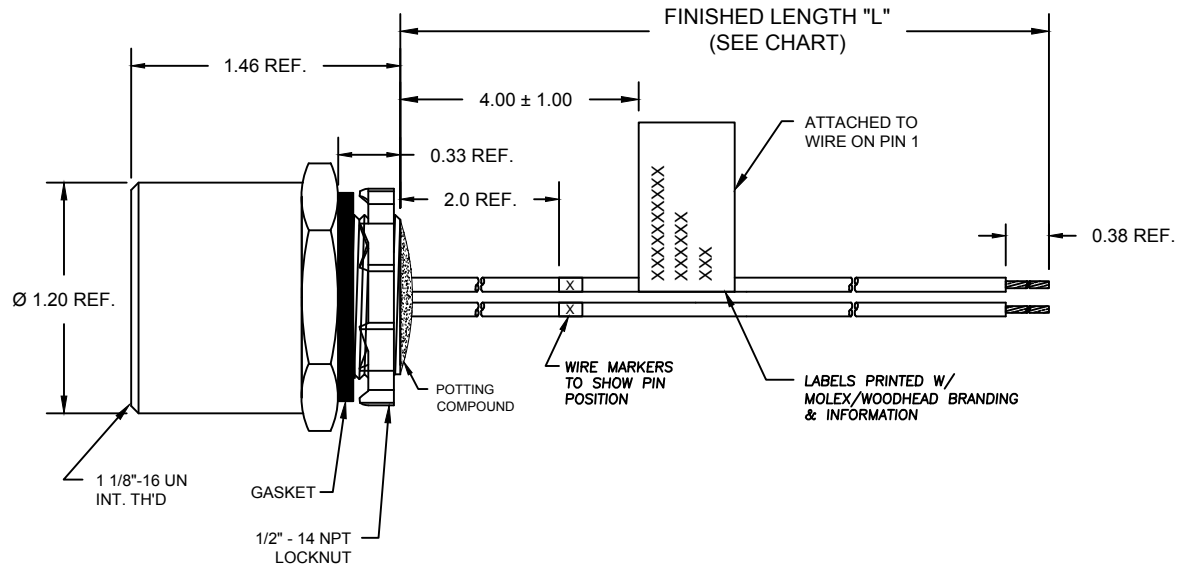

1	BLUE/YELLOW
2	BLUE/YELLOW
3	BLUE/YELLOW
4	BLUE/YELLOW
5	BLUE/YELLOW
6	BLUE/YELLOW
7	BLUE/YELLOW
8	GREEN
9	BLUE/YELLOW
10	WHITE/BLUE

MOLEX SAP P/N#	ENGINEERING P/N#	"L" (Meters)	"L" (INCH)	TOLERANCE (INCH)
1300150257	3R1000AA4M020D	2.0 M	78.74"	+3.50"/-0.00"
1300150259	3R1000AA4M040D	4.0 M	157.48"	+6.50"/-0.00"

SPECIFICATIONS:

SHELL MATERIAL: ANODIZED ALUMINUM
CONTACT MATERIAL: GOLD/NICKEL OVER COPPER ALLOY
INSERT MATERIAL: YELLOW TPE
LOCKNUT: ZINC-PLATED STEEL
GASKET: BLACK NEOPRENE

WIRES: #16-1, PVC LEADS
ASSEMBLY RATING: 600V, 9A

ENVIRONMENTAL: -20°C TO 105°C
IP67 WHEN MATED

AGENCY APPROVALS: UL LISTED

INITIAL RELEASE EC NO: IPG2012-0406 DRWN: VOU 2010/12/16 CHKD: TWOLDEGE APPR: JFMURPHY 2013/04/05		QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
2	REV			mm	INCH	DRAWN BY VOU	DATE 2010/12/16	TITLE MINI-CHANGE RECEPTACLE 10P F/FR 1/2 NPT MOUNT #16-1 PVC WIRES				
			4 PLACES	±---	±---	CHECKED BY TWOLDEGE	DATE 2013/03/04					
			3 PLACES	±---	±.005	APPROVED BY JFMURPHY	DATE 2013/04/05	MOLEX INCORPORATED				
			2 PLACES	±0.13	±.010	MATERIAL NO.						
		1 PLACE	±0.25	±.020	SEE CHART		SD-130015-011		1 OF 1			
			ANGULAR ±1/2°									
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				