




TOP VIEW

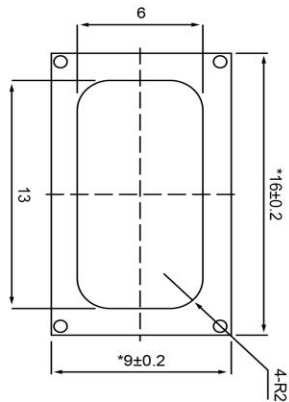


SIDE VIEW (1)



SIDE VIEW (2)



BOTTOM VIEW

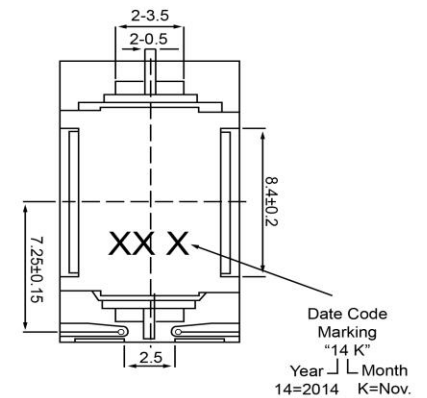

Specifications

Description	Value	Unit
Shape	Rectangle	
Resonant Frequency	550	(Hz)
Frequency Range	550 ~ 20,000	(Hz)
SPL @ 10cm	87	(dBA)
Impedance	8	(Ohm)
Cone Material	Polyester	
Nominal Power	0.5	(W)
Max Power	1.0	(W)
Mount Type	Flush Mount	
Operating Temperature	-20 ~ +70	°C
Storage Temperature	-20 ~ +70	°C
Weight	1.0	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



DB UNLIMITED

Dynamic Micro Speaker

Revision History

Version	Description			Date	Approved
1	Released from Engineering			11/12/2014	J.S.
Drawn by	Date	Checked by	Date	Approved by	Date
A.B.	11/12/2014	C.E.	11/12/2014	J.S.	11/12/2014

SM160508-1