

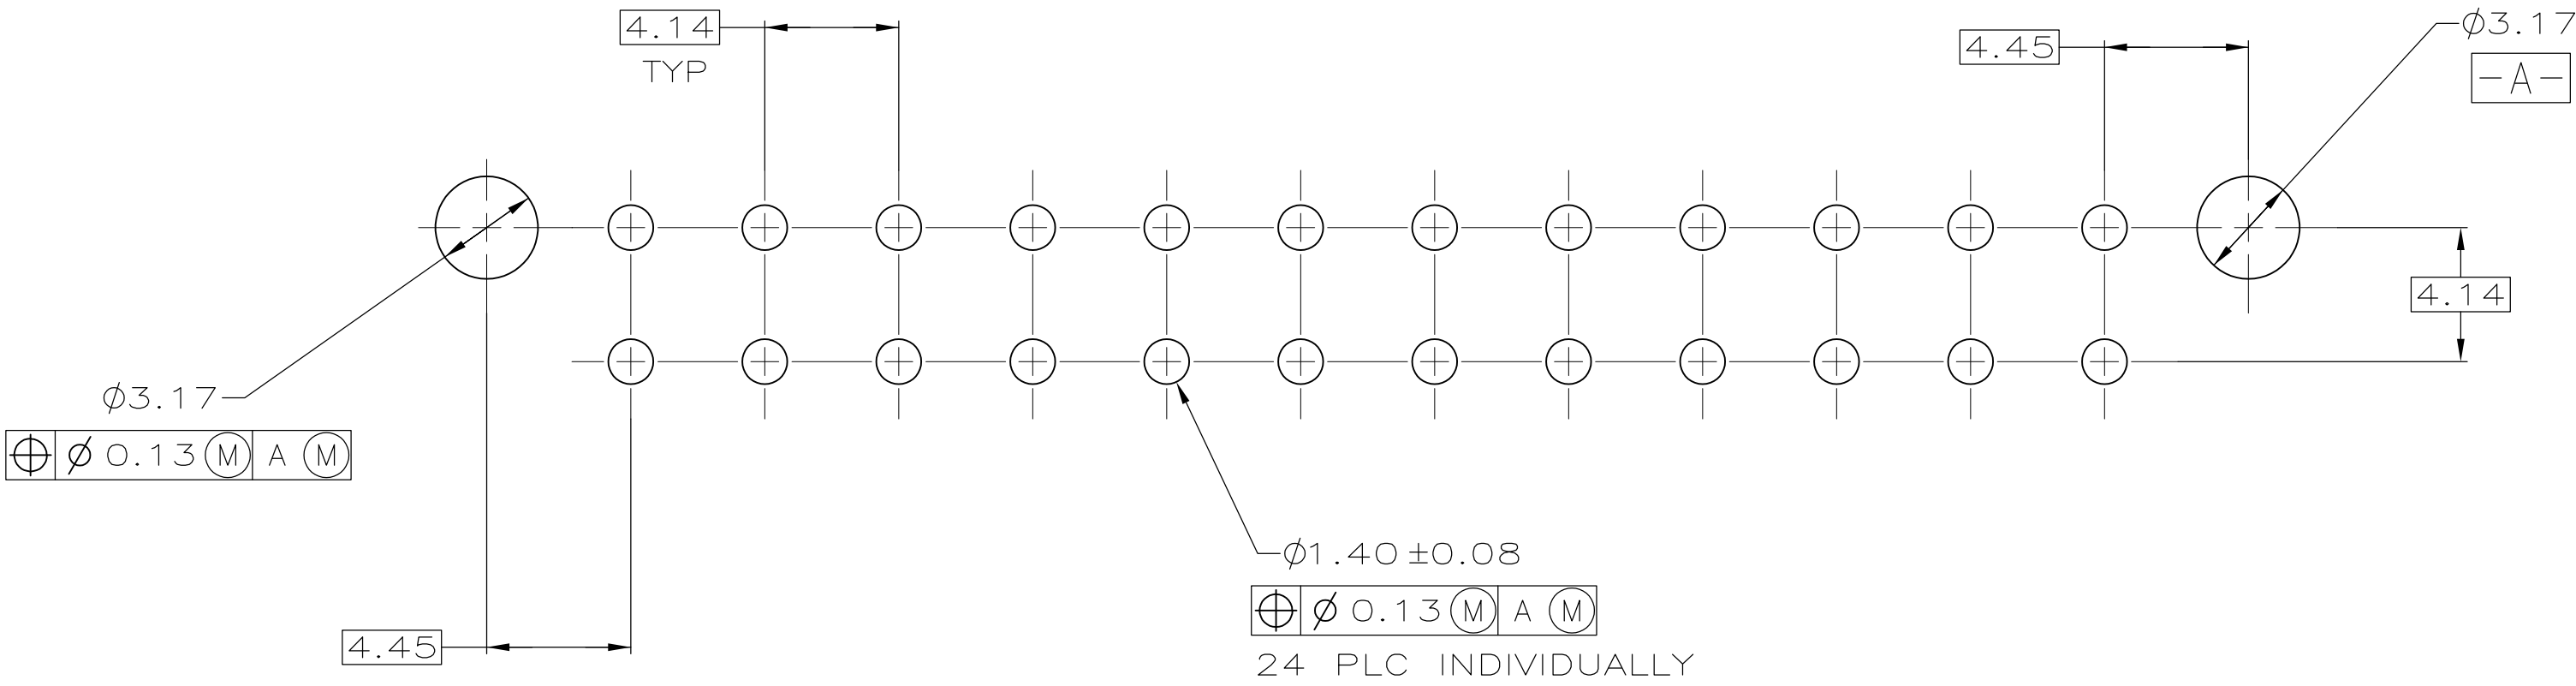
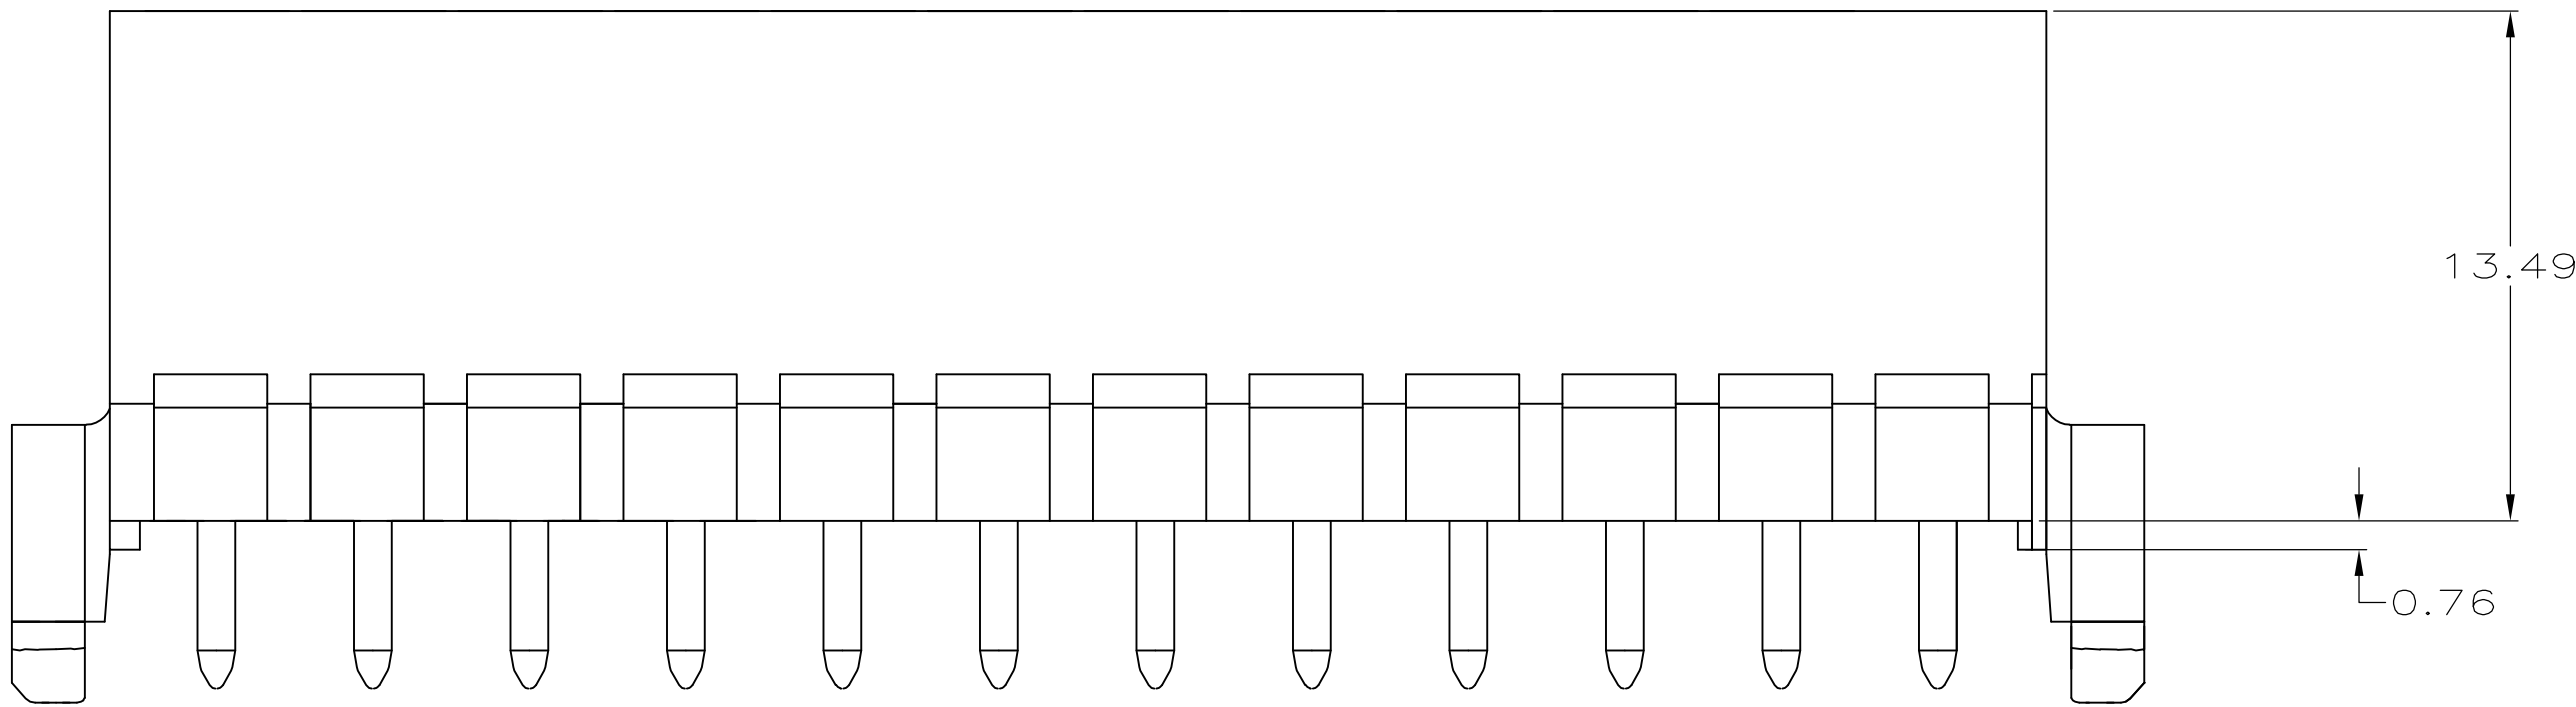
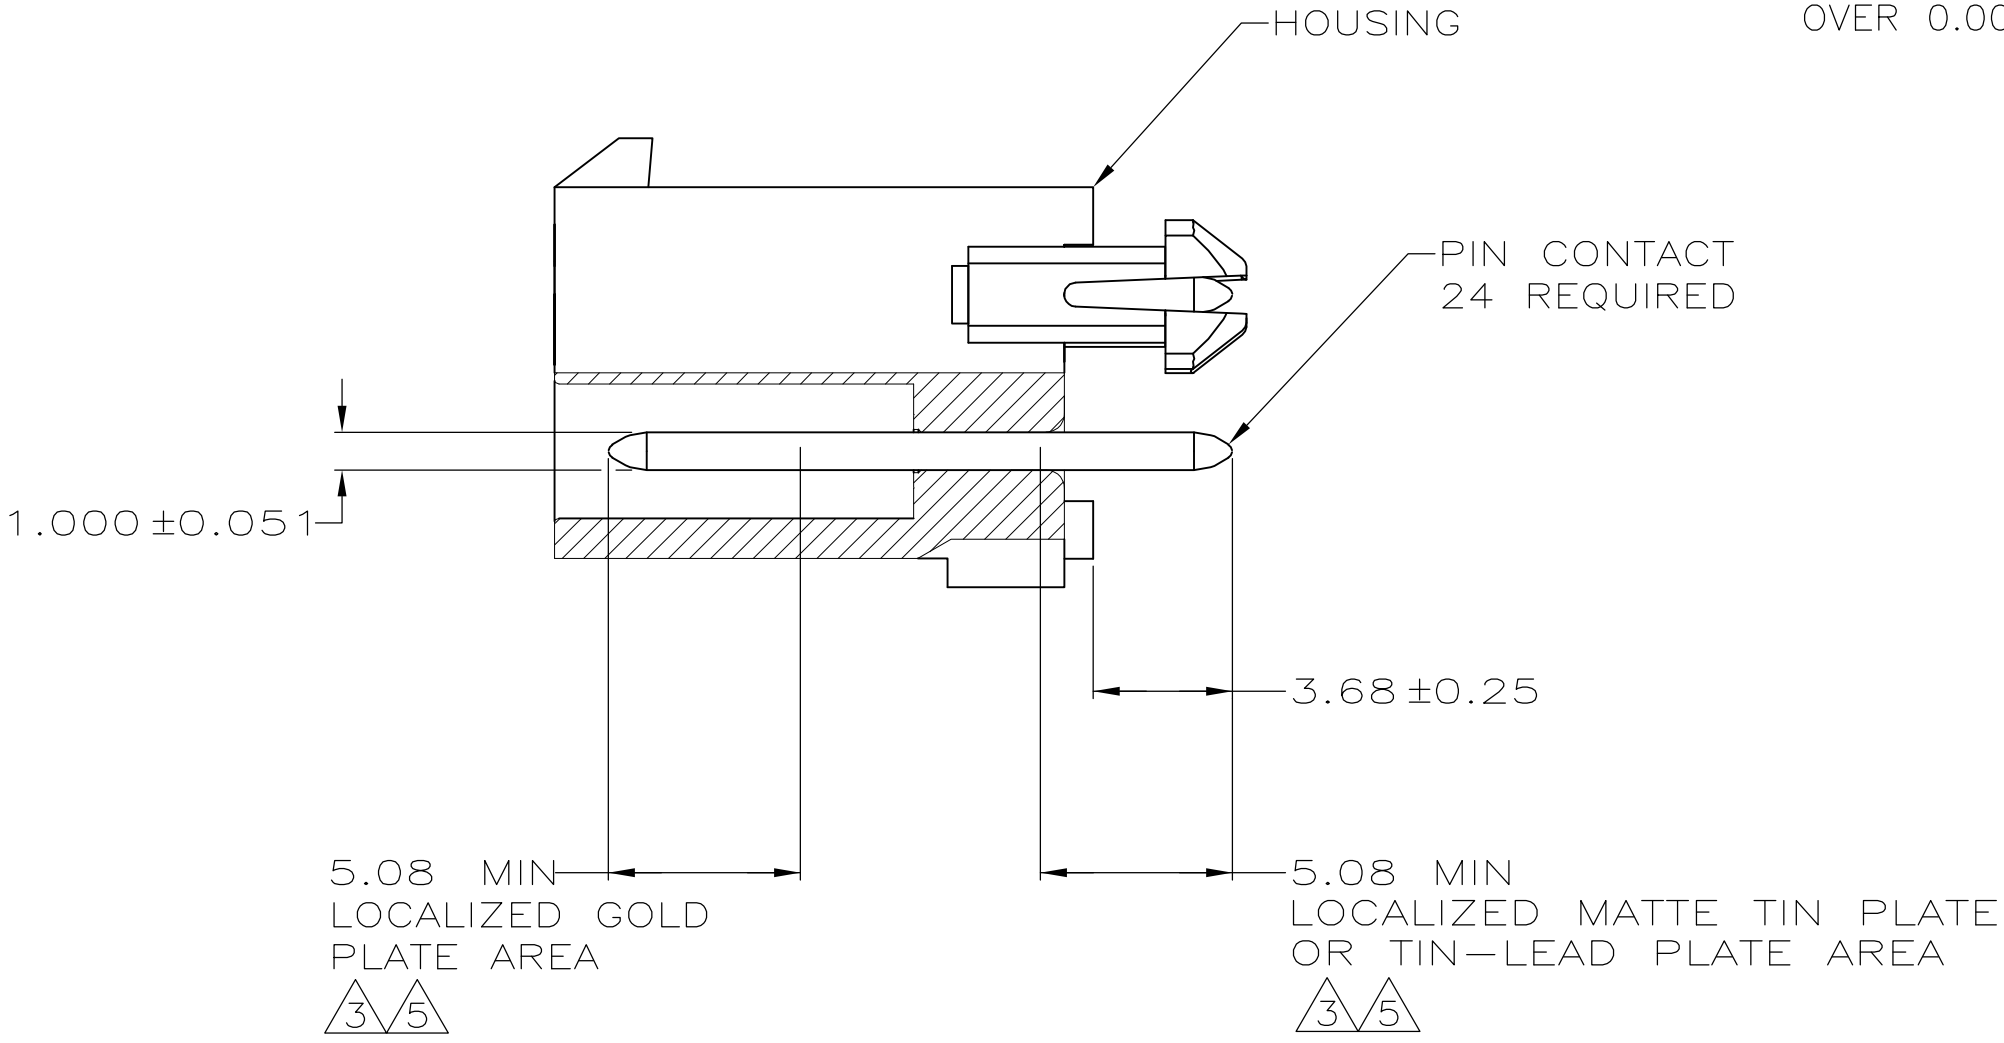


LOC	DIST	REVISIONS				
		F	LTR	DESCRIPTION	DATE	DWN APVD
CM	0	F		REVISED PER ECR-15-010337	24JUL2015	RK SC

1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 108-11-3.
2. 0.00381 MIN MATTE TIN LEAD OVER 0.00127 MIN NICKEL.
3. 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
4. 0.00381 MIN MATTE TIN OVER 0.00127 MIN NICKEL.
5. 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

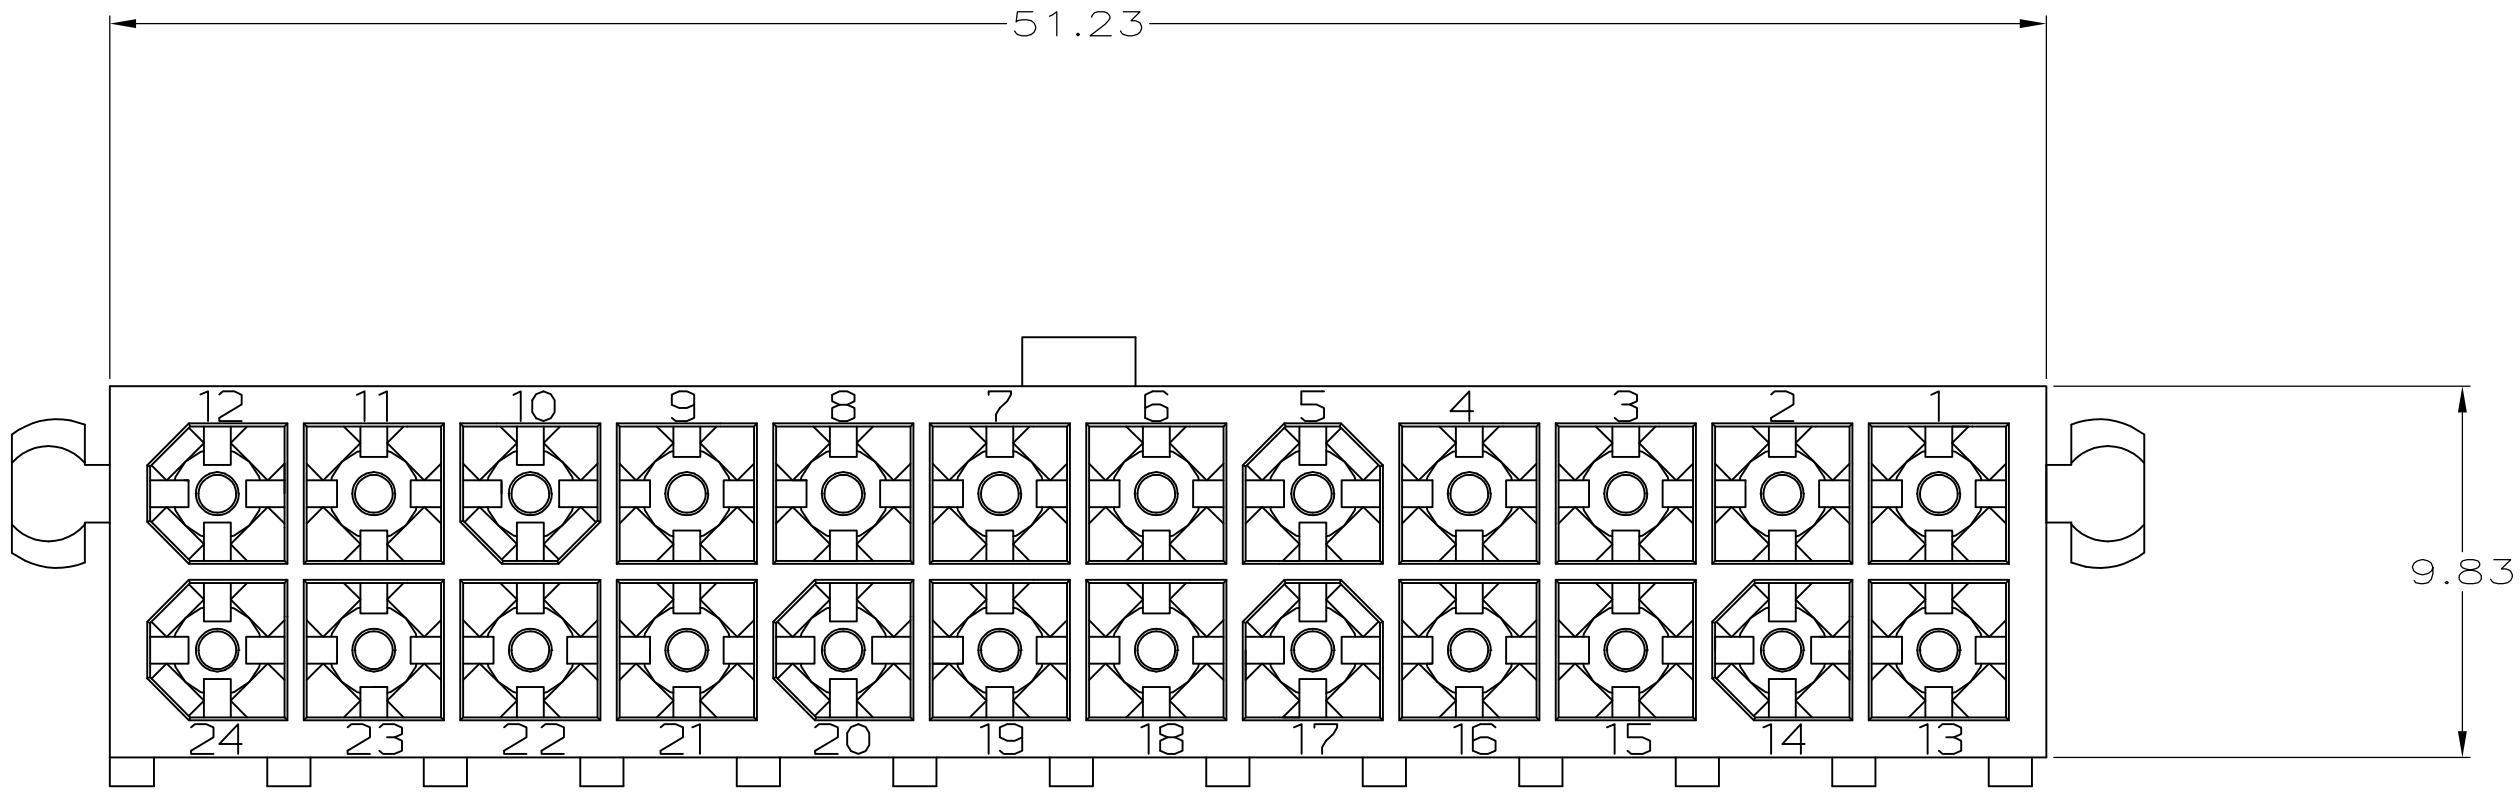

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

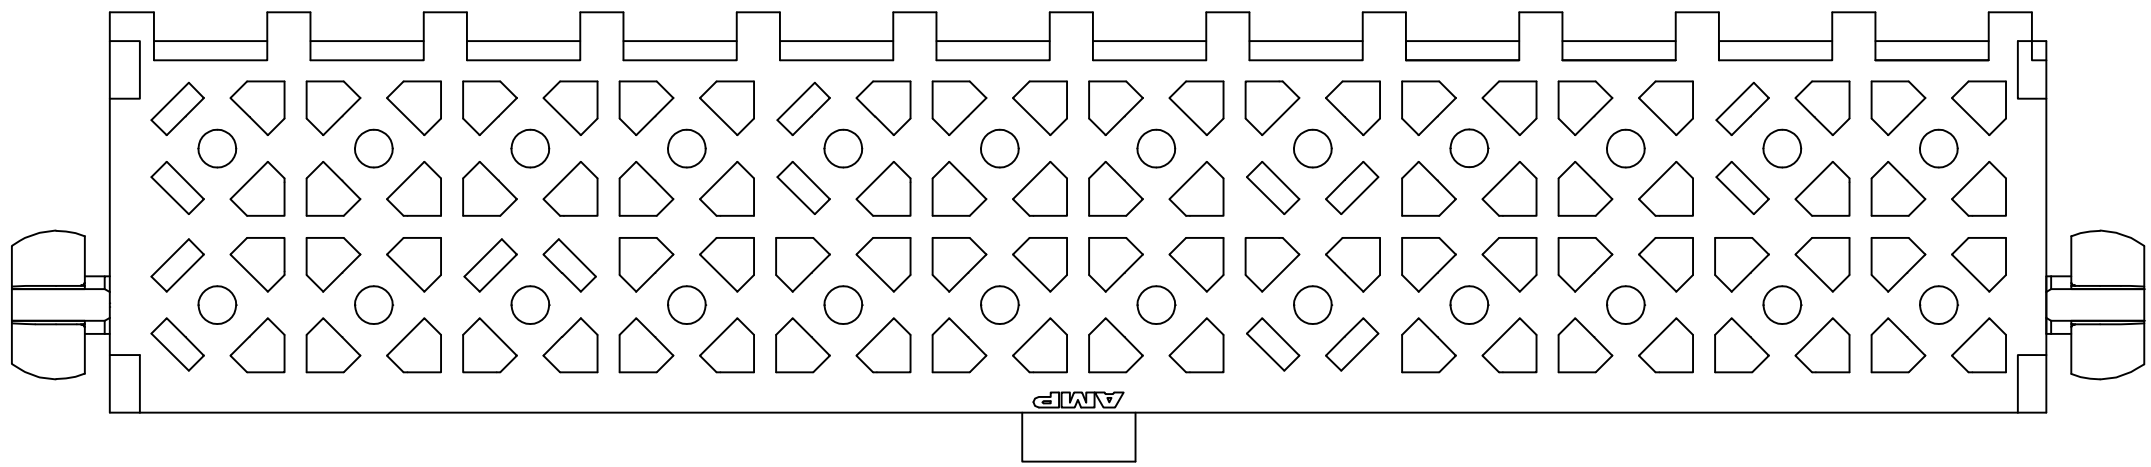

BRASS, GOLD 5	NYLON, 94V-0, WHITE	1-794072-1
BRASS, TIN 4	NYLON, 94V-0, WHITE	1-794072-0
BRASS, GOLD 3	NYLON, 94V-0, WHITE	794072-2
BRASS, TIN LEAD 2	NYLON, 94V-0, WHITE	794072-1
PIN CONTACT MATERIAL AND FINISH		HOUSING MATERIAL AND COLOR
PART NUMBER		
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S CARPENTER 07JUN05 CHK R JONES 6/7/05 APVD R JONES 6/7/05 NAME
DIMENSIONS:		SIZE
mm		CAGE CODE
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWING NO
0 PLC ± -		RESTRICTED TO
1 PLC ± -		
2 PLC ± 0.13		
3 PLC ± -		
4 PLC ± -		
ANGLES ± -		
FINISH		
MATERIAL		WEIGHT
-		-
CUSTOMER DRAWING		SCALE 5:1
		SHEET 1 OF 1
		REV F