

SPECIFICATIONS

ELECTRICAL

RESISTANCE RANGE-----500 TO 100,000 OHMS  
 RESISTANCE TOLERANCE-----±15%  
 LINEARITY INDEPENDENT-----±1.5%  
 POWER RATING-----1.0 WATTS  
 ELECTRICAL ANGLE-----320±5°  
 END RESISTANCE-----LESS THAN 1 OHM  
 RESOLUTION-----ESSENTIALLY INFINITE  
 OUTPUT SMOOTHNESS-----BELOW 0.1% AGAINST INPUT VOLTAGE  
 CONTACT RESISTANCE VARIATION-----BELOW 2%  
 INSULATION RESISTANCE-----100MEGOHMS @ 500VDC MIN.  
 DIELECTRIC STRENGTH-----500 VAC

MECHANICAL

MECHANICAL ANGLE-----320±5°  
 ROTATIONAL TORQUE-----0.7 OZ.IN.  
 SHAFT END PLAY-----.005 MAX.  
 TEMPERATURE COEFFICIENT-----±400 PPM/°C  
 WEIGHT, APPROX.-----1.1 OZ.

ENVIRONMENTAL

OPERATING TEMPERATURE----- -55°C TO +105°C  
 TEMPERATURE COEFFICIENT----- ±400 P.P.M./°C  
 VIBRATION----- 10HZ TO 2000HZ 15G  
 SHOCK----- 50G 11MS  
 MOISTURE RESISTANCE----- 40°C 95%RH 120 HOURS

NON-STANDARDS AVAILABLE

REAR SHAFT EXTENTION  
 FRONT SHAFT MODIFICATIONS  
 CENTER TAP  
 SPECIAL ELECTRICAL AND MECHANICAL ANGLES

MATERIALS




HOUSING-----BRASS, PLATED  
 TERMINALS-----GOLD PLATED BRASS  
 BUSHING-----BRASS  
 SHAFT-----STAINLESS STEEL  
 ELEMENT-----CONDUCTIVE PLASTIC

CONDUCTIVE PLASTIC ELEMENT

TOLERANCES

XX = +/- .010" FRACT. = +/- 1/64"  
 XXX = +/- .005" ANGLES = +/- 1/2"  
 ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.


REV.	BY	DATE	PART NO.
B	BT	10-5 87	REDRAWN
C	BT	5-4-01	406 WAS .4063

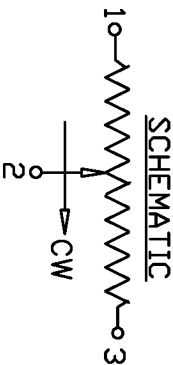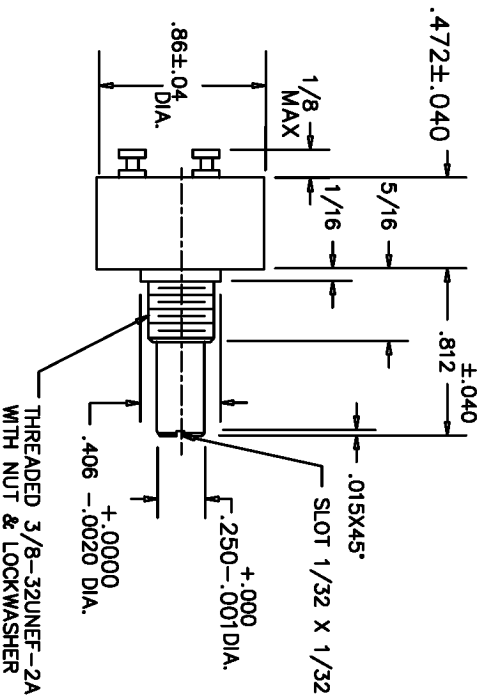

THIS DOCUMENT CONTAINS PROPRIETARY DATA OF POLARIS INDUSTRIAL ENTERPRISES, INC. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THERE OF MAY BE MADE EXCEPT BY WRITTEN PERMISSION.

TITLE

SINGLE TURN  
 POTENTIOMETER



CARLSBAD  
 SYSTEMS  
 CALIFORNIA

PART NO.

SP22D