

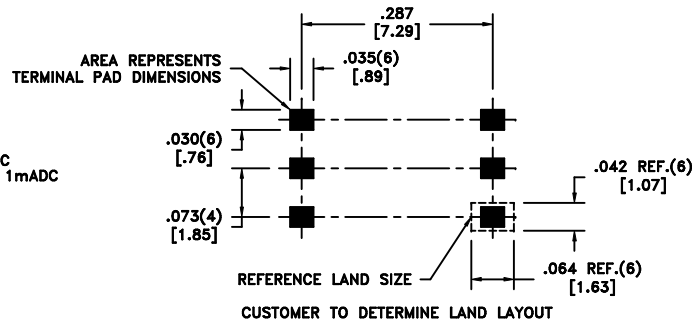



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

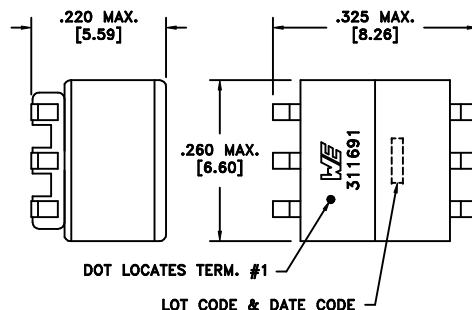

TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.315 ohms ±10%
D.C. RESISTANCE	6-4 @20°C	7.95 ohms ±10%
INDUCTANCE	1-3 100kHz, 100mVAC, L _s	60uH ±15%
SATURATION CURRENT	20% rolloff from initial	250mA
LEAKAGE INDUCTANCE	1-3 tie(4+6), 100kHz, 100mVAC, L _s	1.0uH max.
DIELECTRIC	1-6 1500VAC, 1 second	-
URNS RATIO	(6-4):(1-3)	5:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel		Angles: ±1°	TRANSFORMER	750311691
		PKG-0637		Decimals: ±.005 [.13]		
		www.we-online.com/midcom		Fractions: ±1/64		
				Footprint: ±.005 [.13]		
6A	11/10	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750311691	SPECIFICATION SHEET 1 OF 1

