

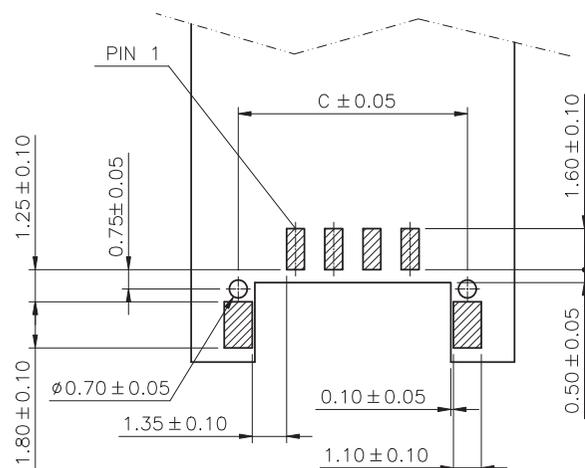
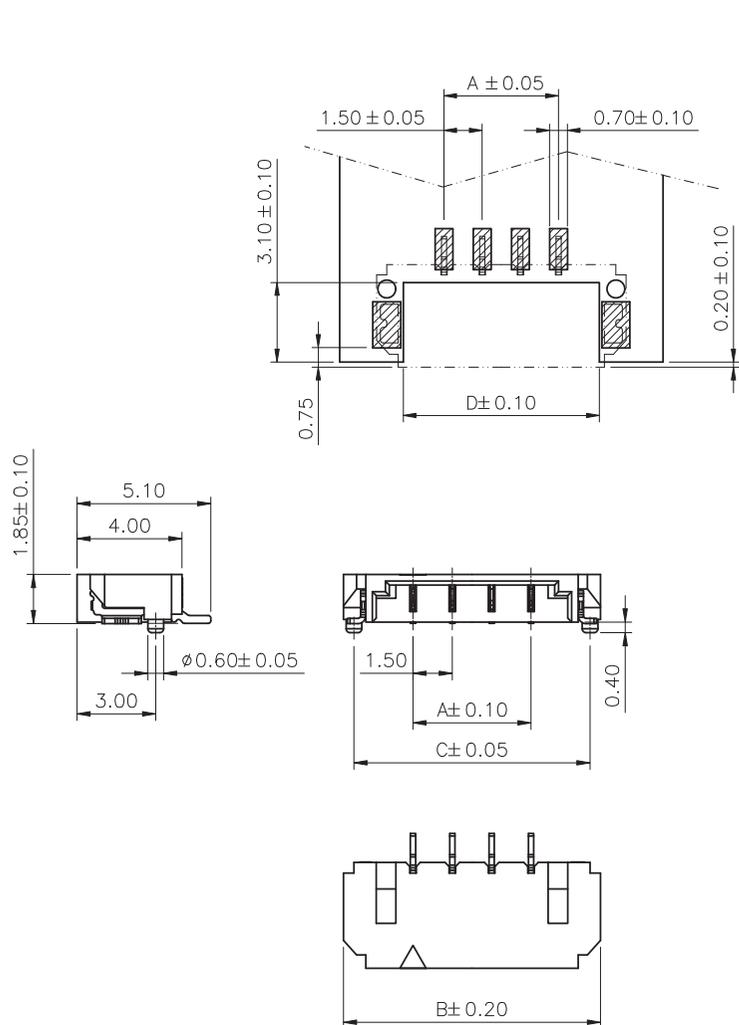
1

2

3

4

5



PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA6T
 FLAMMABILITY RATING: UL94V0
 COLOR: WHITE
 CONTACT MATERIAL: PHOSPHOR BRONZE
 CONTACT PLATING: 3.05 μ m MAT TIN OVER 1.27 μ m Ni
 SOLDER TAB MATERIAL: BRASS
 SOLDER TAB PLATING: 3.05 μ m MAT TIN OVER 1.27 μ m Ni

ENVIRONMENTAL

OPERATING TEMPERATURE: -25°C UP TO +85°C
 COMPLIANCE: HALOGEN AND ROHS

ELECTRICAL

CURRENT RATING: 1A MAX
 WORKING VOLTAGE: 150 VAC
 WITHSTANDING VOLTAGE: 1300 VAC/MIN
 INSULATION RESISTANCE: > 1000 M Ω
 CONTACT RESISTANCE: 20 m Ω MAX

PITCH: 1,50 mm

SOLDERING

JEDEC LEAD FREE REFLOW SOLDERING PROCESS

PACKAGING

TAPE & REEL

DIMENSION

A= 1.5 x (NB. PIN -1)


B= A + 5.3

C= A + 4.5

D= A + 3.2

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = \pm 0.2.XX = \pm 0.15

APPROVAL: GMo

UNIT: MM

SCALE:

SHEET: 1/4

DRAW: AK

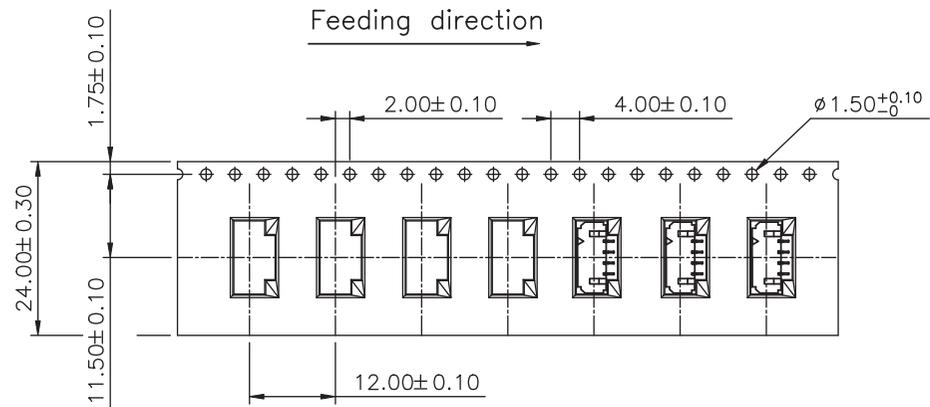
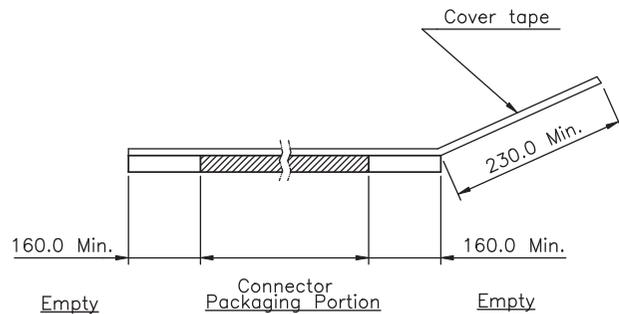
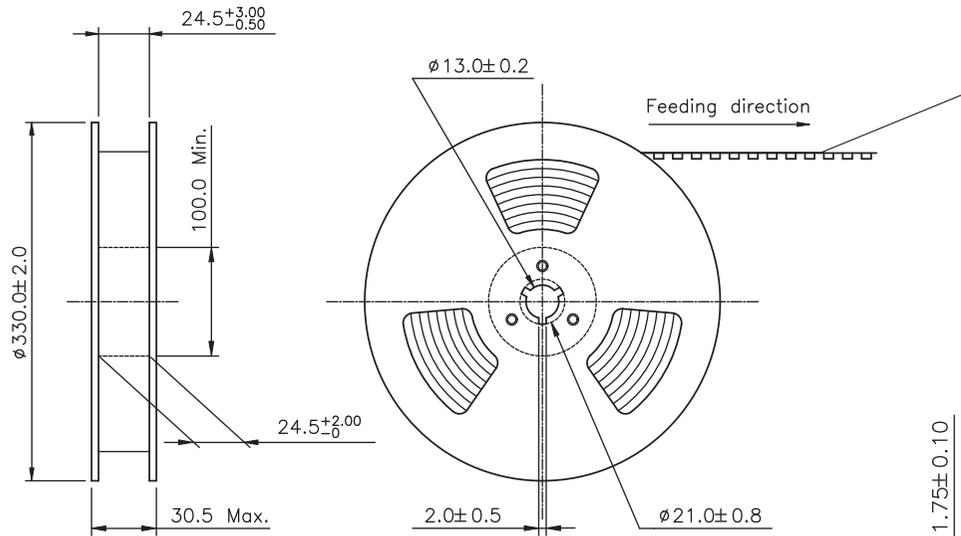
DESCRIPTION: BtB 1.50MM PITCH PLUG HORIZONTAL

WERI PART NO: 695 4xx 150 122

SIZE


A4

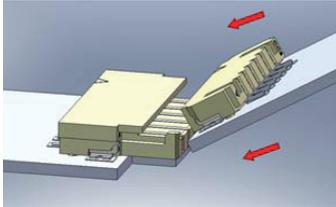
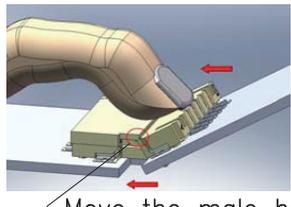
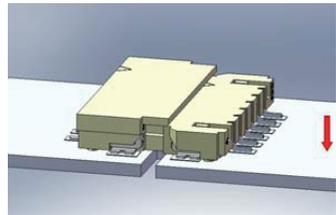
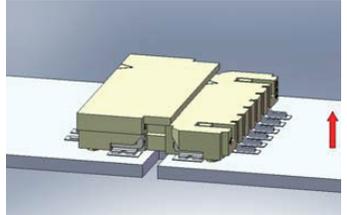
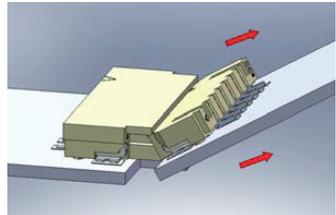
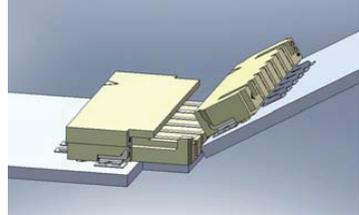
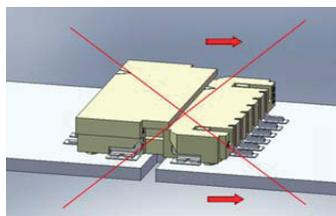
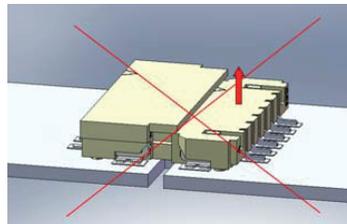
| | | | |
|-----|-----------|------|----|
| F | | | |
| E | | | |
| D | | | |
| C | | | |
| B | | | |
| A | 16-JUN-15 | PDF | AK |
| REV | DATE | FILE | BY |




WIDTH : 24 mm Carrier

1800 pcs/reel
9 reels/carton
16200 pcs/carton

| | | | | | | |
|----------------|------|------|---------------|--|---|---|
| RoHS Compliant | | | | PROJECTION:  | GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15 |  |
| F | | | | | | |
| E | | | | | | |
| D | | | | | | |
| C | | | APPROVAL: GMo | UNIT: MM | DESCRIPTION: BtB 1.50MM PITCH PLUG HORIZONTAL | SIZE A4 |
| B | | | | SCALE: | | |
| A | | PDF | | SHEET: 2/4 | | |
| REV | DATE | FILE | BY | DRAW: AK | | |

| | 1 | 2 | 3 | 4 | 5 | |
|--------|---|--|--|---|---|---|
| Mating | <p>Step 1: The male header should be tilted during insertion.</p>  <p>Female Male</p> | <p>Step 2: Push the male header to the end. Make sure the male header is under the rib of female header by finger.</p>  <p>Female Male</p> | <p>Step 3: Press down the male header down vertically to finish the connection.</p>  <p>Female Male</p> | A | | |
| | <p>Step 1: Lift the male header up at 30°~60°.</p>  <p>Female Male</p> | <p>Step 2: Remove male header at an angle to finish the disconnection.</p>  <p>Female Male</p> | <p>Step 3: Finish</p>  <p>Female Male</p> | | B | |
| | <p>Please do not separate the connectors horizontally to prevent damaging them.</p>  <p>Female Male</p> | <p>Please do not separate the connectors vertically to prevent damaging them.</p>  <p>Female Male</p> | | | | C |

| | | | | | | | | |
|----------------|------|------|----|---|-------------------|---|---|------|
| RoHS Compliant | | | | PROJECTION: | GENERAL TOLERANCE |  | DESCRIPTION: BtB 1.50MM PITCH PLUG HORIZONTAL | SIZE |
| F | | | |  | .X = +/- 0.2 | | | |
| E | | | | APPROVAL: GMo | .XX = +/- 0.15 | UNIT: MM SCALE: SHEET: 3/4 DRAW: AK | WERI PART NO: 695 4xx 150 122 | |
| D | | | | | | | | |
| C | | | | | | | | |
| B | | | | | | | | |
| A | | PDF | | | | | | |
| REV | DATE | FILE | BY | | | | | |

1

2

3

4

5

Cautions and Warnings:

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval.


In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

A

B

C

RoHS Compliant

| | | | | | | | |
|-----|-----------|------|----|--|---|---|-------------------|
| G | | | | PROJECTION:  | GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15 |  | |
| F | | | | | | | |
| E | | | | | | | |
| D | | | | | | | |
| C | | | | APPROVAL: JC | UNIT: MM | DESCRIPTION: DISCLAIMER | SIZE A4 |
| B | | | | | SCALE: | | |
| A | 10-SEP-14 | PDF | QL | | SHEET: 4/4 | WERI PART NO: DISCLAIMER | |
| REV | DATE | FILE | BY | | DRAW: QL | | |

D