



REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	TECHNICAL DATA SHEET RELEASE	12-MAY-14	KMM	RFC

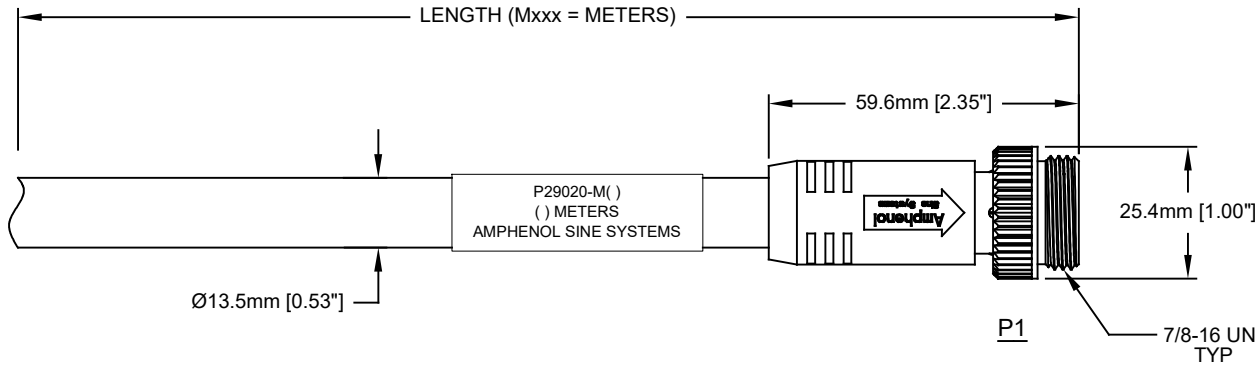

WIRING DIAGRAM

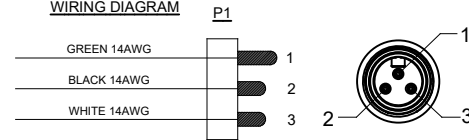

Amphenol P/N	MOLEX	TURCK
P29020-M*	103006A46M*	RSM34-*M
P29020-M1	103006A46M010	RSM34-010M
P29020-M2	103006A46M020	RSM34-020M
P29020-M3	103006A46M030	RSM34-030M
P29020-M5	103006A46M050	RSM34-050M
P29020-M10	103006A46M100	RSM34-100M

TOLERANCE	
0-2.99 M = +100.0/-25.0mm	0-9.99 FT = +4" / -1"
3-8.99 M = +150.0/-25.0mm	10.00-29.99 FT = +6" / -1"
9-14.99 M = +300.0/-25.0mm	30.00-49.99 FT = +12" / -1"
15-OVER M = +450.0/-25.0mm	50 FT-OVER = +18" / -1"

QUANTITY	PART NUMBER	DESCRIPTION	ITEM
MATERIALS LIST			
UNLESS OTHERWISE SPECIFIED		SIGNATURES	
1) All dimensions are in metric (mm).		DATE	
2) Tolerances are as follows:		DRAWN: KMM 12-MAY-14	
1 PL DEC ±0.30 Fractions ±1/64		CHECKED: MRF 12-MAY-14	
2 PL DEC ±0.15		ENGINEER: KMM	
3 PL DEC ±0.08		APPROVAL: RFC 12-MAY-14	
3) Note reference =		CUSTOMER:	
MATERIAL SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
PROCESS SPECIFICATIONS:		SIZE	TYPE
NEXT ASSY:		C-	P29020-Mxxx
		SCALE	FULL
		DWG NO:	P29020-Mxxx
		SHEET	1 OF 1

Amphenol

Sine Systems - www.amphenol-sine.com
44724 Morley Drive
Clinton Township, MI 48036

M22 POWERBOSS LITE, 3 PIN, MALE-STR, 14 AWG, TC-ER/STOOW, PVC JACKET

TRM22 PB LITE, 3 PIN, M-STR, 14AWG, TC-ER/STOOW, PVC JACKET NO: C-P29020-Mxxx

REV: A1 SH: 1 OF: 1

TECHNICAL DATA:

- 1) MATERIALS:
 - COUPLING NUT: MACHINED ALUMINUM, ANODIZED
 - INSULATION INSERT: THERMOPLASTIC, UL 94/V-0
 - CONTACT: GOLD FLASH PLATING OVER COPPER ALLOY
 - OVERMOLD MATERIAL: THERMOPLASTIC COLOR: BLACK
 - CABLE RATING: UL LISTED DUAL RATED TC-ER/STOOW, CSA TYPE STOOW, FT4 FLAME RATING, 600V, 90°C DRY & 75°C WET (TC-ER), 105°C (STOOW)
 - CABLE JACKET MATERIAL: PVC COLOR: BLACK
 - CONDUCTOR INSULATION: PVC
 - NUMBER OF CONDUCTORS: (3) 14AWG

- 2) ELECTRICAL DATA:
 - CURRENT (MAX): 15A
 - VOLTAGE (MAX): 600V AC/DC
 - INSULATION RESISTANCE (MIN): 5000M OHMS
 - DIELECTRIC TEST VOLTAGE: 2200V

- 3) MECHANICAL DATA:
 - TEMPERATURE RANGE: -40°C TO 90°C
 - PROTECTION: IP67 (MATED CONDITION)
 - MATING CYCLES: >500
 - VIBRATION RESISTANCE PER MIL-STD-202 METHOD 204
 - THERMAL SHOCK PER MIL-STD-202 METHOD 207
 - 48 HOUR SALT SPRAY PER MIL-STD-202 METHOD 101

- 4) RoHS COMPLIANT
- 5) UL 2237 LISTED ASSEMBLY
- UL FILE NUMBERS: E339703