
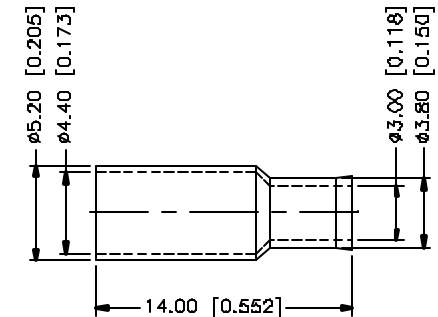


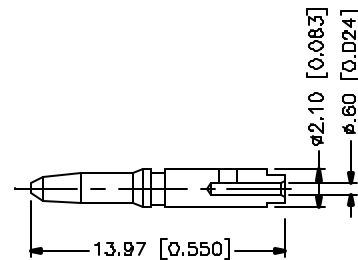
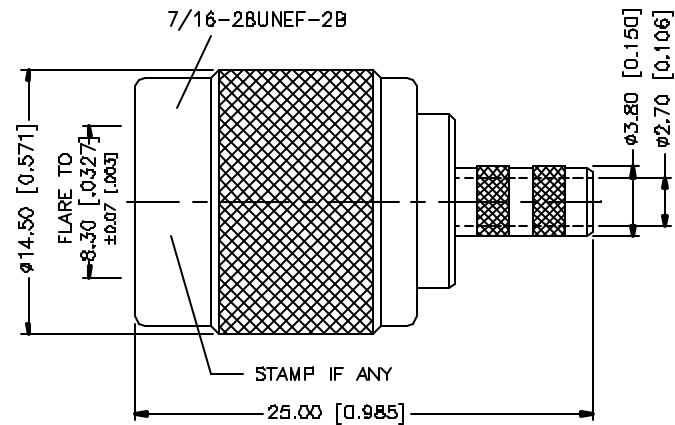


REV.	DATE	DESCRIPTION
A	02/06/00	UPDATE DIMENSIONS – ADD SLEEVE
B	11/25/03	UPDATE DIMENSIONS

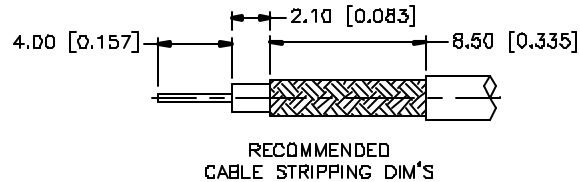

CRIMP NOTES:

1. CRIMPED FERRULE
HEX SIZE .178"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
3. VSWR 1.6 MAX. UP TO 3 Ghz

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.	11/25/03							
7	FERRULE	BRASS	NICKEL	1		CHECKED			PART DESCRIPTION						
6	SPACER	BRASS	NICKEL	1		ISSUED			TNC CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U CABLE)						
5	SLEEVE	TEFLON	NATURAL	1					PART NO. 122116						
4	RETAINER RING	BRASS	NICKEL	1		BHEET	1 OF 1								
3	INSULATOR	TEFLON	NATURAL	1		CAD FILE	C:/122/122116.DWG	DWG. NO.	122116.DWG	REV.	B	SIZE	A	SCALE	NA
2	CONTACT PIN	BRASS	GOLD	1	.020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015"										
1	SHELL/BODY	BRASS	NICKEL	1	1.180 - 4.724 = ± 0.020"										
					DO NOT SCALE DRAWING										