


MATERIALS AND FINISHES

SMA PLUG: SEE SD-73251-489

CABLE: TEMP-FLEX 141-1701

SHRINK TUBE: VERSAFIT

LABEL : RAYCHEM RPS

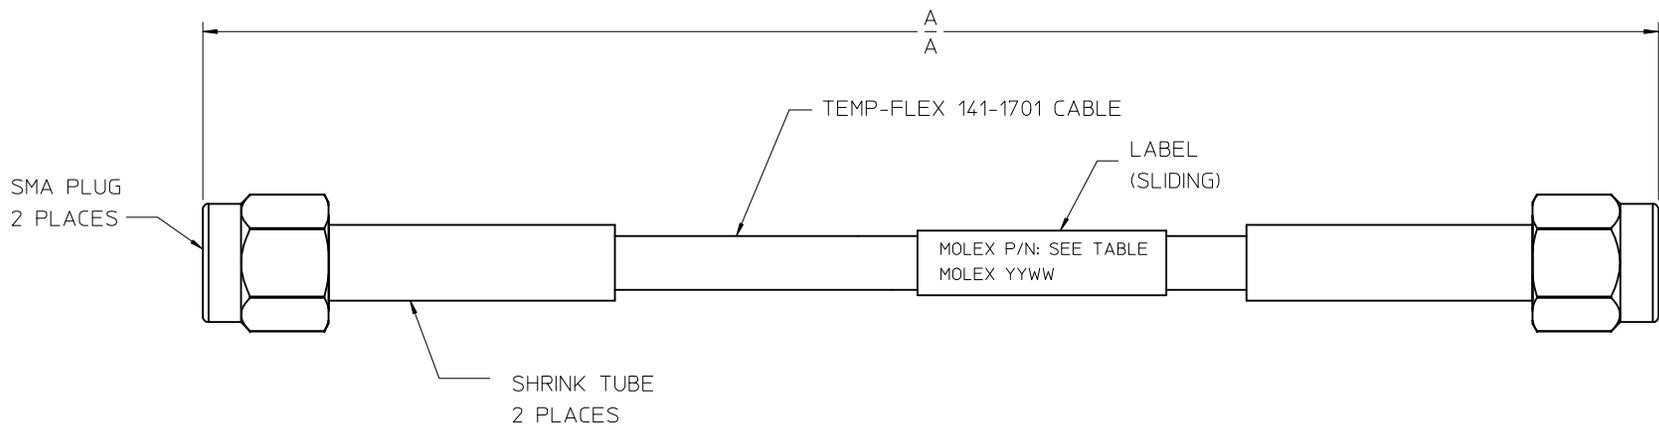

89762-1373	19.685	500.00	1.10
89762-1372	120.000	3048.00	7.00
89762-1371	12.00	304.80	0.70
89762-1370	6.000	152.40	0.40
PART NO.	IN	MM	INSERTION LOSS MAX TO 26 GHZ (dB)
	DIM A		

MAX VSWR 1.35 TO 26 GHZ

CHG: UPDATE INSERTION LOSS SPEC	EC NO: URF2015-0691	DRWN: BOMALLEY 2015/06/15	CHKD: LLM 2015/06/15	APPR: AROBERTSON 2015/06/15
REV	A4	DESCRIPTION		

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽=0	mm INCH
▽=0	4 PLACES ± --- ± ---
	3 PLACES ± --- ± ---
	2 PLACES ± --- ± ---
	1 PLACE ± --- ± ---
	ANGULAR ± 2 °
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DRAWN BY	DATE	TITLE
JLEE02	2013/03/27	SMA PLUG ST X2 ON TEMP-FLEX 141-1701 CABLE EWR-5133, CA-SMA/SMA
CHECKED BY	DATE	
SSS	2013/03/27	
APPROVED BY	DATE	
JWIENER	2013/08/29	
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE TABLE	SD-89762-137	1 OF 1

DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
MM/IN		METRIC	

MOLEX INCORPORATED	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	