

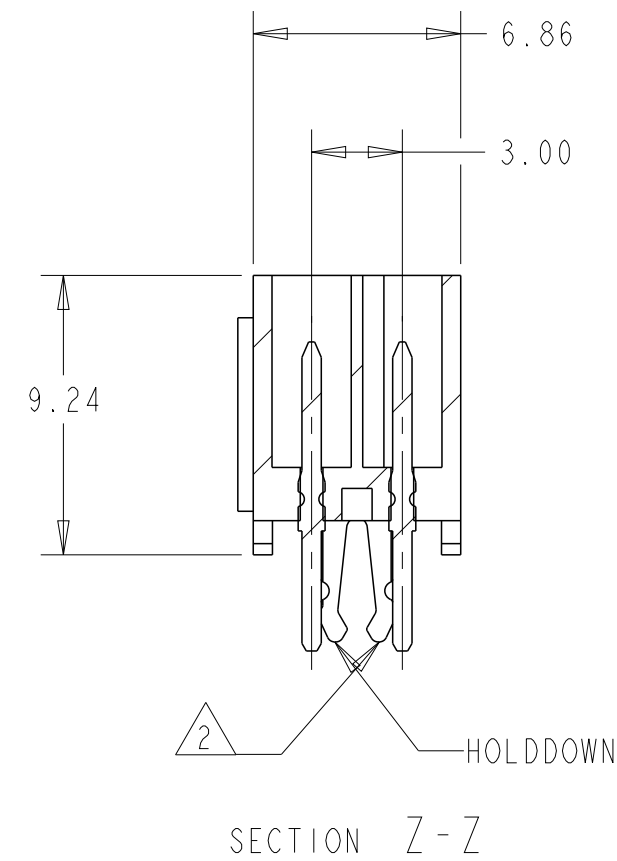


| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
|           | FI  | REVISED PER ECR-16-011494 | 21JUN2017 | NK  | CX   |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |
|           |     |                           |           |     |      |

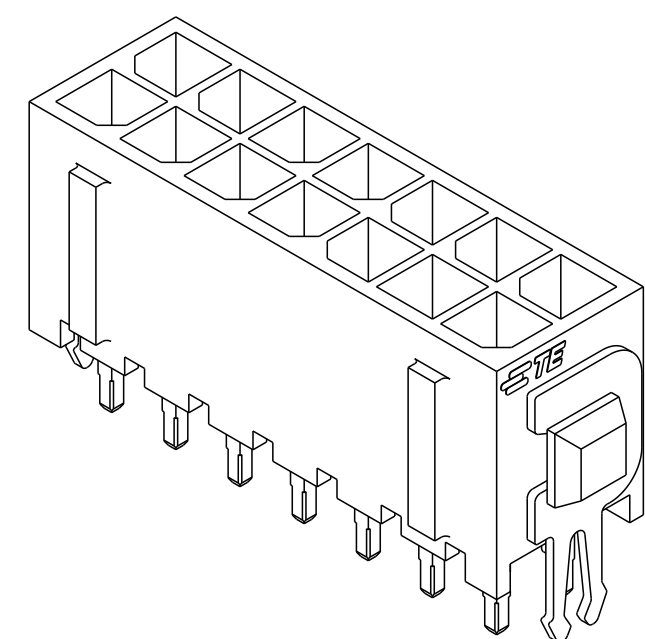

- 1 MATERIAL: HOUSING - HIGH TEMP. NYLON, UL 94V-0, BLACK.  
CONTACT - BRASS.  
HOLD DOWNS- PHOSPHOR BRONZE.
- 2 MAXIMUM INSERTION 30 LBS.
- 3 RECOMMENDED BOARD THICKNESS 1.57.
- 4 FINISH: CONTACT-2.54 $\mu$ m MINIMUM TIN-LEAD OVER  
1.27 $\mu$ m MINIMUM NICKEL.  
HOLD DOWNS-2.54 $\mu$ m TIN-LEAD
- 5 FINISH: CONTACT - 2.54 $\mu$ m MINIMUM MATTE TIN  
OVER 1.27 $\mu$ m MINIMUM NICKEL.  
HOLD DOWNS- 2.54 $\mu$ m MATTE TIN

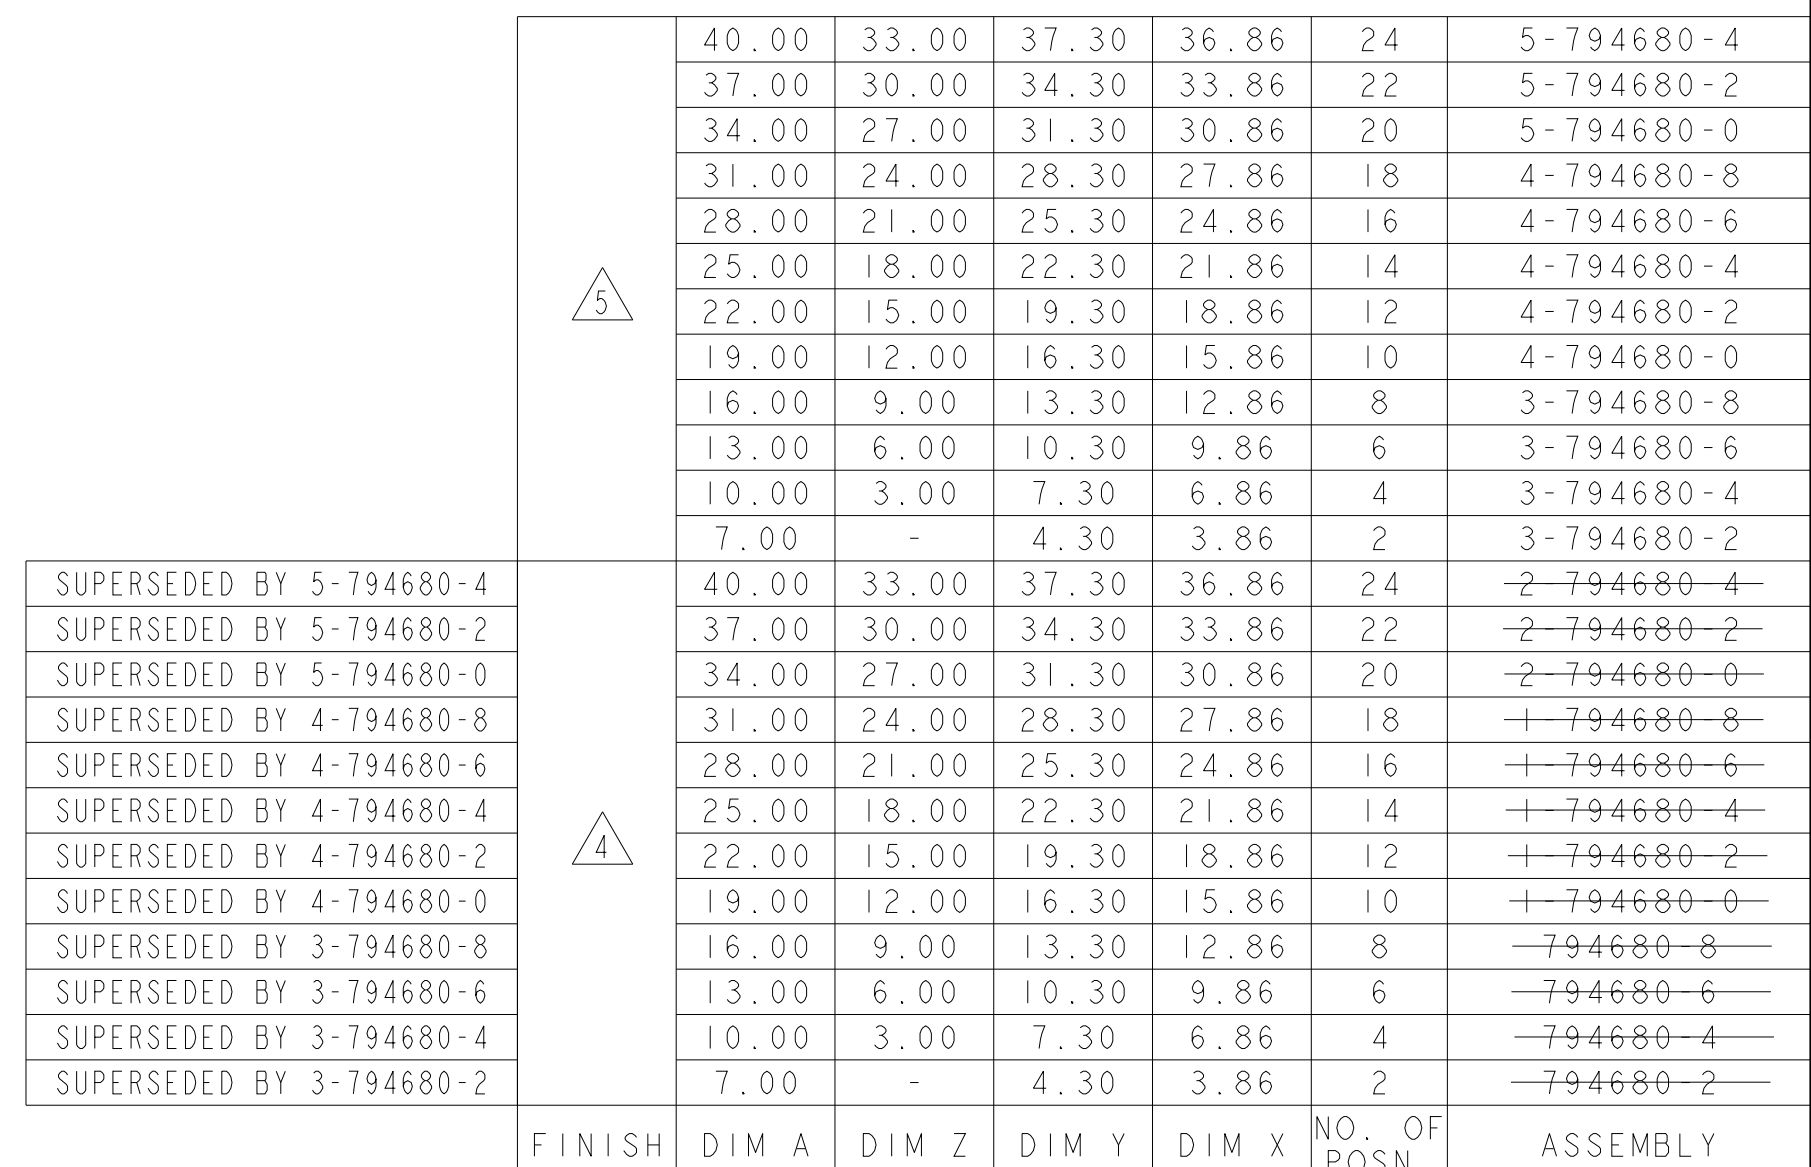

### 3 DIMENSIONAL MODEL

|                                                                                                   |  |                                                                                             |  |                                                                                                       |  |
|---------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                            |  | DWN 23-MAR-2005<br>S. HOOVER<br>CHK 23-MAR-2005<br>C. JONES<br>APVD 23-MAR-2005<br>C. JONES |  |  TE Connectivity |  |
| DIMENSIONS:<br>mm [INCHES]                                                                        |  | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:                                                   |  | NAME<br>VERTICAL HEADER ASSEMBLY,<br>THRU HOLE, TIN, DUAL ROW,<br>MICRO MATE-N-LOK(TM)                |  |
|              |  | PRODUCT SPEC<br>-                                                                           |  |                                                                                                       |  |
| 0 PLC ±.<br>1 PLC ±.<br>2 PLC ±0.20 [.008]<br>3 PLC ±.<br>4 PLC ±.<br>ANGLES ±.<br>FINISH         |  | APPLICATION SPEC<br>-                                                                       |  |                                                                                                       |  |
| MATERIAL<br> |  | WEIGHT<br>-                                                                                 |  | SIZE<br>A2                                                                                            |  |
| SEE TABLE                                                                                         |  | CUSTOMER DRAWING                                                                            |  | CAGE CODE<br>00779                                                                                    |  |
|                                                                                                   |  | DRAWING NO<br>C-794680                                                                      |  | RESTRICTED TO<br>-                                                                                    |  |
|                                                                                                   |  | SCALE<br>4:1                                                                                |  | SHEET<br>OF<br>REV<br>F1                                                                              |  |