
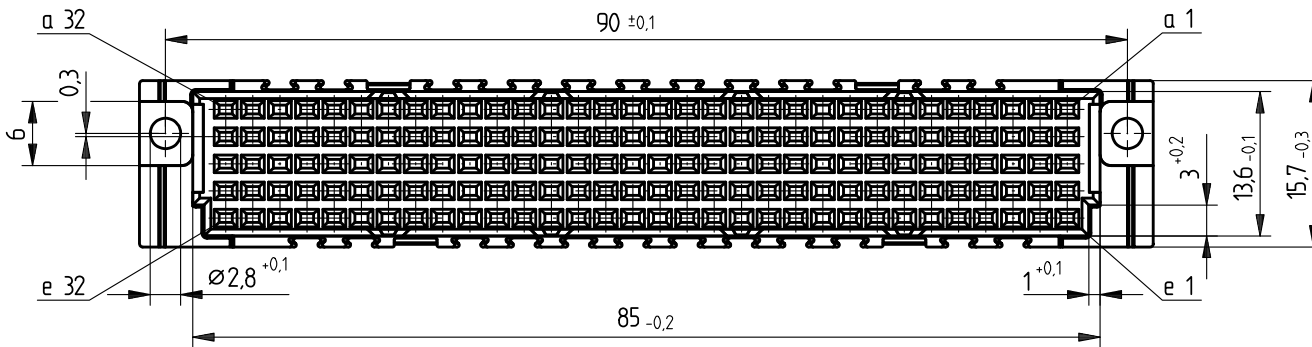
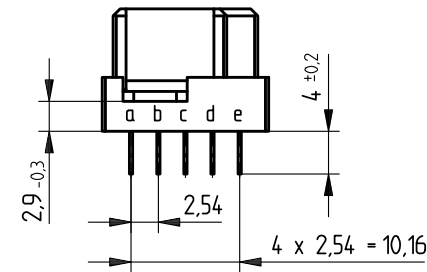


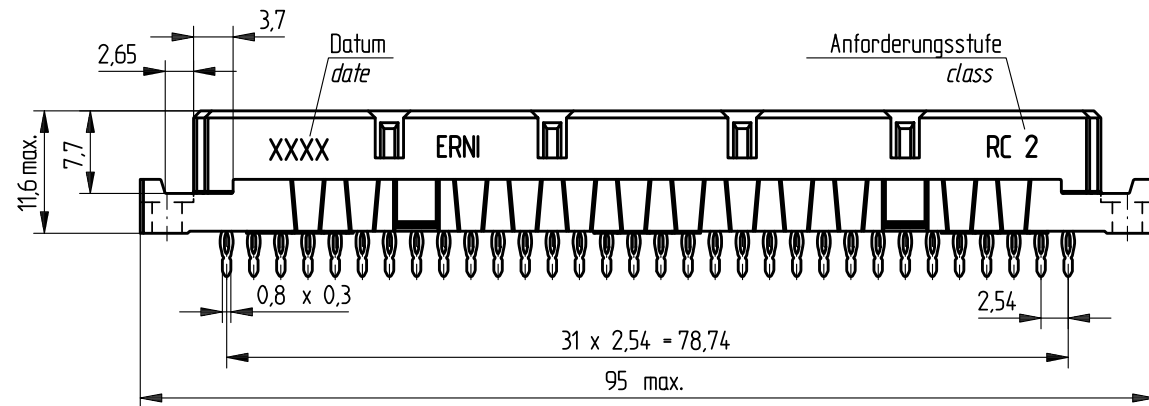

Elastische Einpresszone / *compliant pressfit zone*

Isolierwerkstoff / *housing material* : PBT GF30

Bauart 7 / *type 7*

Anforderungsstufe 2 = 400 Steckzyklen / *performance class 2 = 400 mating cycles*

Fehlende Masse und Angaben gemäß IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions according to IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 / Nr. 6


diameter of drilled hole see drawing 164062 / No. 6

1) $\varnothing 1,0 \pm 0,09$ Durchmesser des metallisierten Loches


$\varnothing 1,0 \pm 0,09$ Diameter of finished plated-through hole

Bestückungsplan / *contact layout*

■ bestückt / *assemble*

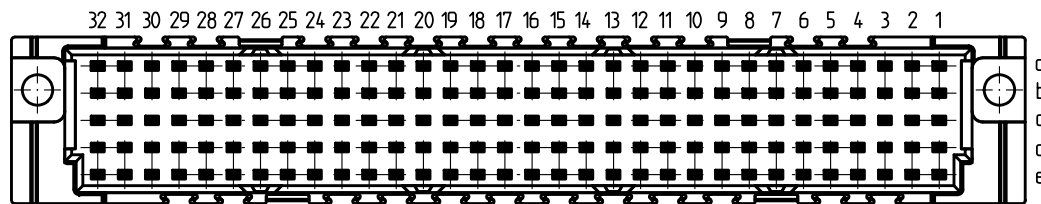

Leiterplatten-Lochbild / *PCB drillhole pattern*

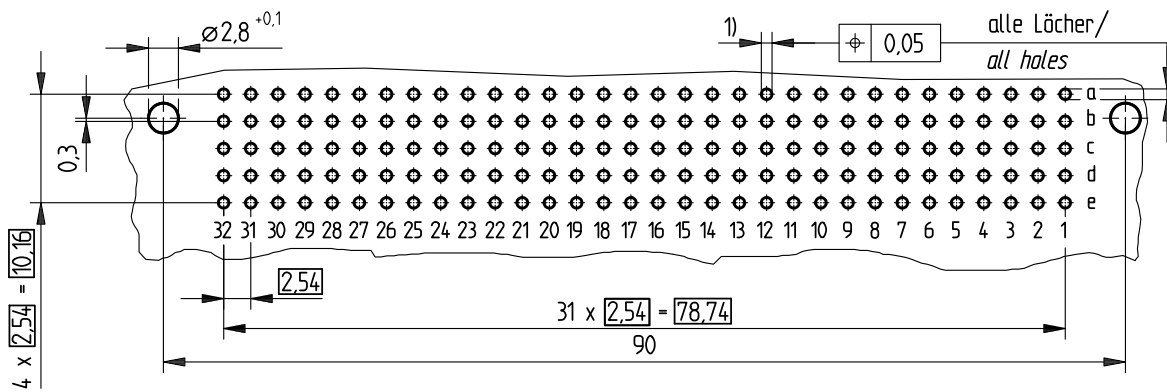

Bedruckung siehe Zeichnung 294875

Marking see drawing 294875

Information:		Tolerances		Scale	2:1
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
a		05.08.2008		Federleiste E 160 EE	
Index		Date		Fem. Connector E 160 Pressfit	
		H:00066424.SZA		254123	
				STVE	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[254123](#)