

4




3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	22APR2015	DL	CW
	A1	ECR-15-013439	11SEP2015	DL	CW

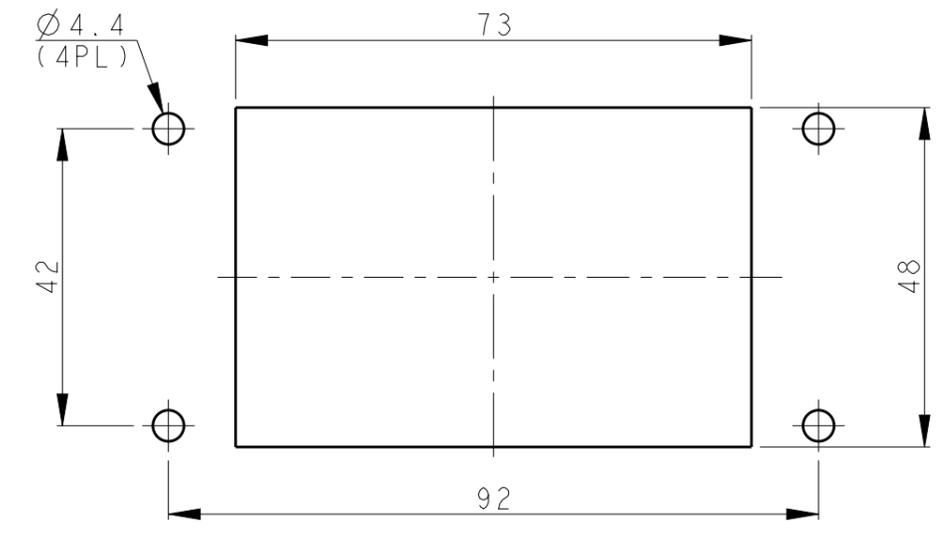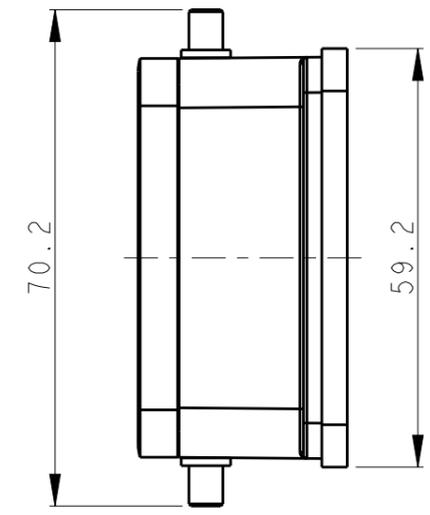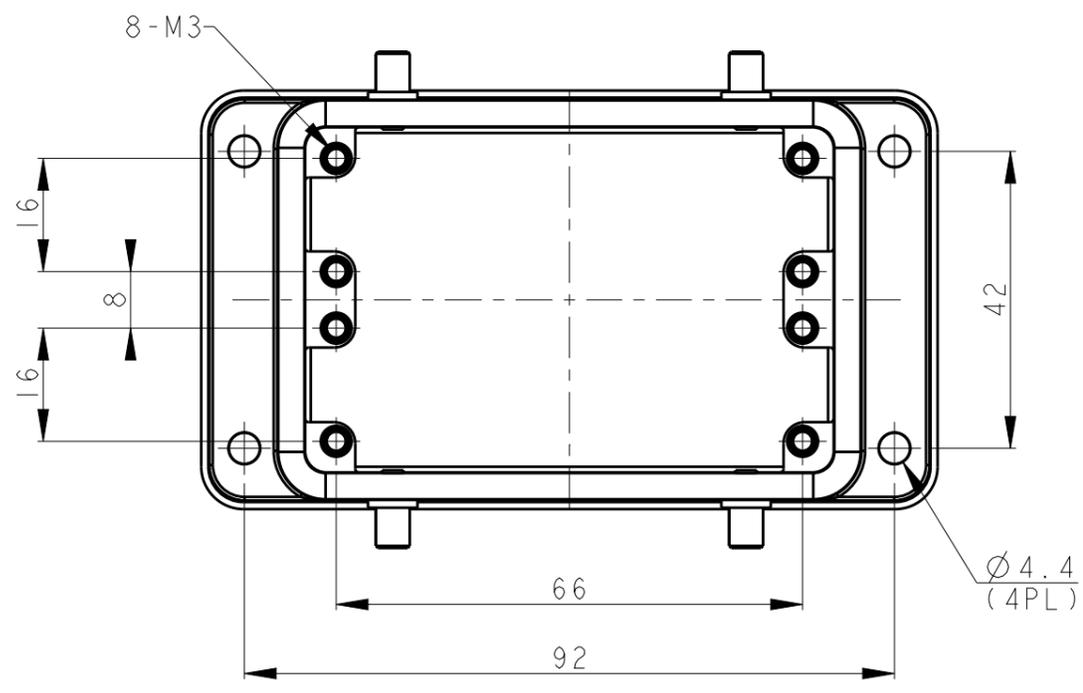

PANNEL CUT OUT

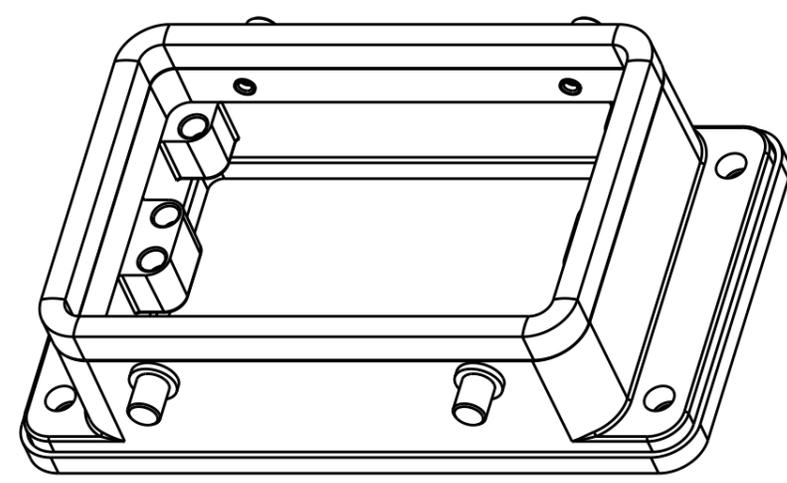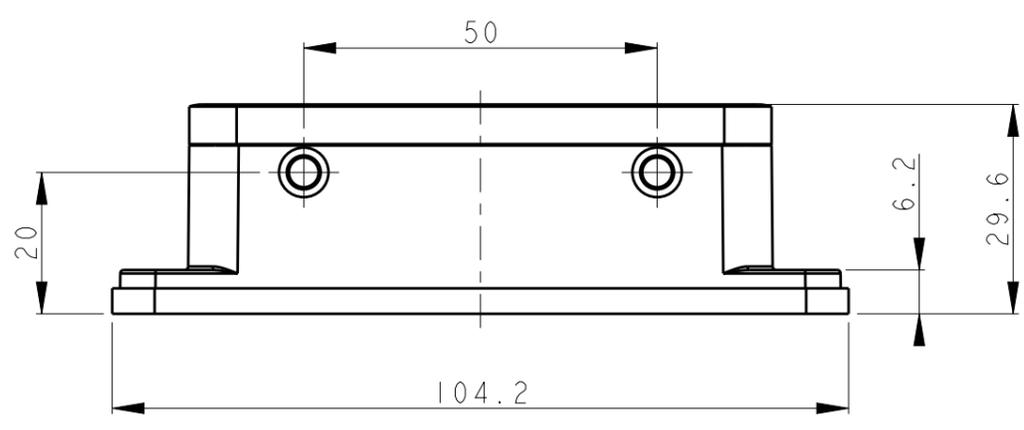

NOTES:
 1. TECHNICAL CHARACTERISTICS:
 BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
 SURFACE TREATMENT: POWDER-COATED, GRAY
 OPERATION TEMPERATURE: -40-+125°C
 DEGREE OF PROTECTION: IP65 (MATED)

注释:
 1. 技术参数:
 主体材料: 铝合金
 表面处理: 粉末喷涂, 灰色
 工作温度: -40-+125°C
 防护等级: IP65(配合)

T1419320001-000	H32A-AG-BO
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	22APR2015	STE TE Connectivity
		DAVID LI		
		CHK	22APR2015	
		CHRIS WANG		
		APVD	22APR2015	NAME
		XU XIANG		H32A-AG-BO
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC
		0 PLC	±-	108-137010
		1 PLC	±-	APPLICATION SPEC
		2 PLC	±-	114-137010
		3 PLC	±-	WEIGHT
		4 PLC	±-	-
		ANGLES	±-	
MATERIAL		FINISH		SIZE
-		-		A3
				CAGE CODE
				-
				DRAWING NO
				©-T1419320001000
				RESTRICTED TO
				-
				SCALE
				1:1
				SHEET
				1 OF 1
				REV
				A1