
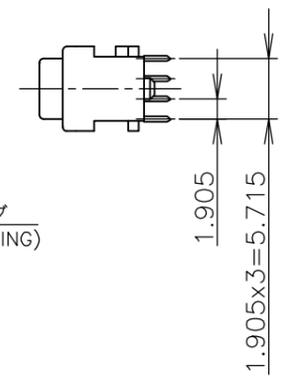




THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JAN , 1992.
 © COPYRIGHT 1992 BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	/	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C		REACTIVATE ECR-09-024354	06NOV09	T.T	T.M

- -; AS SHOWN

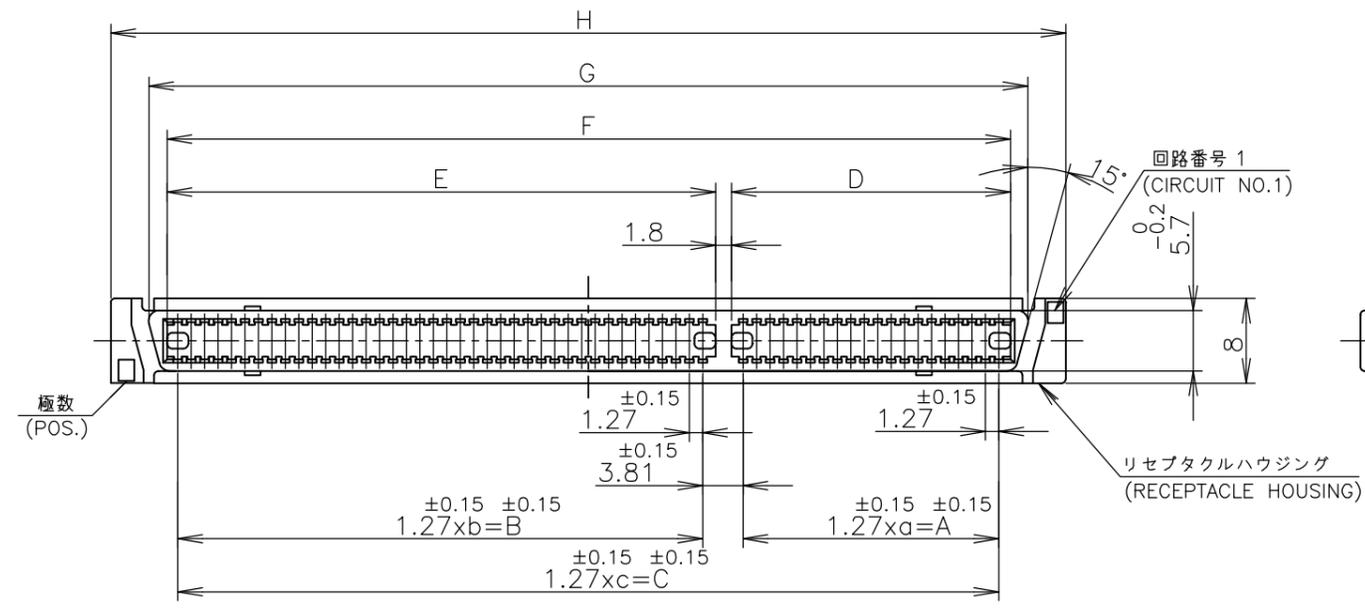

- ① MATERIAL; HOUSING: GLASS FILLED NYLON 6T (UL 94V-0) BLACK.
CONTACT: PHOSPHOR-BRONZE
 - ② FINISH: GOLD PLATING ON CONTACT AREA AND TIN-LEAD PLATING ON TINE AREA OVER NICKEL PLATING.
GOLD PLATING THICKNESS SHOWN TABLE.
 - ③ BOSS FOR POSITIONING: APPLY FROM 40 POSNTO 100 POSN.
- ① 材料: *ハウジング; ガラス入りナイロン 6T (UL 94V-0) 色、黒。
*コンタクト: 燐青銅。
- ② 表面仕上げ;
ニッケル下地めっきに接触部金めっき、半田付部
半田めっきを施す。金めっき厚は下表参照。
- ③ ボスは40極から100極まで適用。

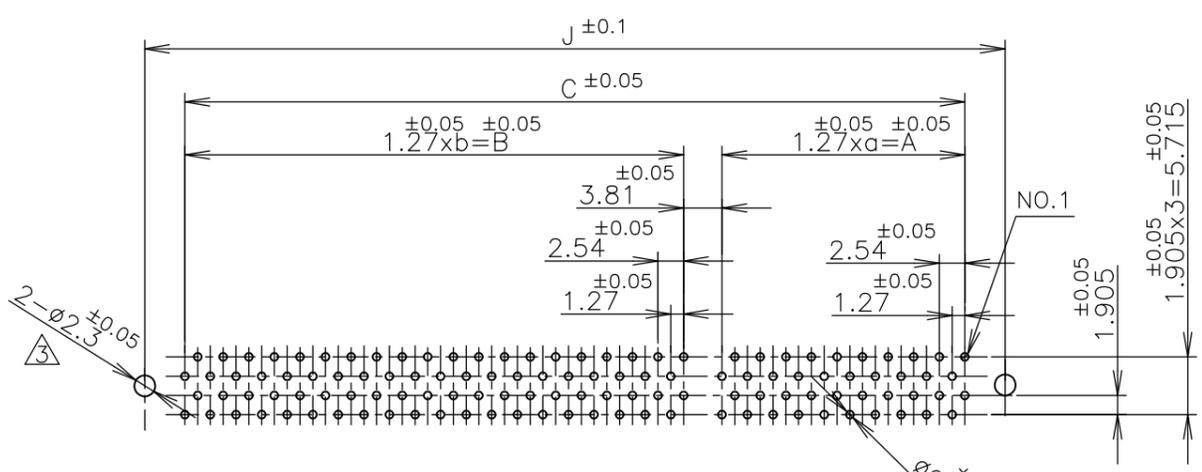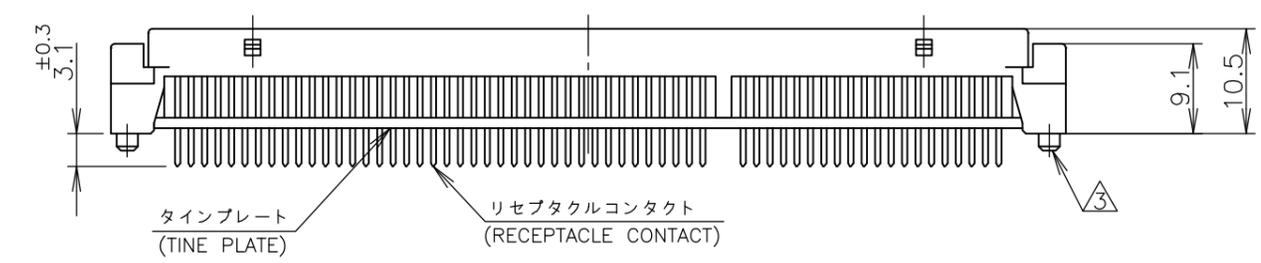

29	36.83	38.83	41.92	49.45	46.8	0.76 μm	60	2-179533-2						
a	A	b	B	c	C	D	E	F	G	H	J	THK OF GOLD	POS.	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN H.KODAMA 27MAY1994	Tyco Electronics Corporation Kawasaki, Japan
CHK Y.FUJIURA 28MAY1994	
APVD Y.FUJIURA 28MAY1994	
NAME Y.FUJIURA	
PRODUCT SPEC 製品規格	AMP FH CONNECTOR RECEPTACLE, VERTICAL 13mm STACKING, HIGH TEMP TYPE
APPLICATION SPEC 取付適用規格	
WEIGHT	SIZE A3 CAGE CODE 00779 DRAWING NO. C-179533 RESTRICTED TO
CUSTOMER DRAWING	SCALE 尺度 NTS SHEET 1 OF 1 REV C

GENERAL TOLERANCE 一般公差

10 ≥	±0.2
30 ≥ > 10	±0.25
100 ≥ > 30	±0.3
ANGLES:	±3°