


# Large Incandescent Indicators

WITH MECHANICAL DIMMER CAP  
FOR MOUNTING IN 1" CLEARANCE HOLE  
FOR 6 TO 250V OPERATION

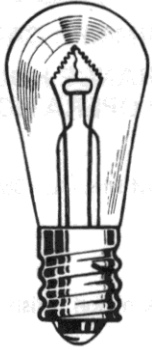

S-6  
CANDELABRA  
SCREW BASE

See lamp ratings  
on page K.

Recognized under the component  
program of Underwriters'  
Laboratories Inc.

75W., 125V.



## MECHANICAL DIMMER CAPS

provide adjustable intensity  
of light emission.



OPEN



PARTLY CLOSED



SEMI-BLACKOUT




COMPLETE BLACKOUT

210 SERIES  
209 SERIES

### BASE PART NUMBERS

### CAP PART NUMBERS



**CONVEX** Mechanical Dimmer

210-0111-200  
back frosted, semi-blackout

209-0111-200  
back frosted, complete blackout

### COMPLETE ASSEMBLY PART NUMBERS

210-4001-0111-201

209-4001-0111-201

210-0901-0111-201

209-0901-0111-201


210-3101-0111-201

209-3101-0111-201

These series indicator lights meet or exceed requirements of MIL-L-3661.

## MATERIALS AND FINISHES

- Mounting Bushing and Lens Holder: Brass, black nickel finish.
- Knurled Flange Ring: Brass, black nickel finish
- Mounting Nut: Brass, white nickel finish.
- Internal-tooth Lockwasher: Phosphor bronze, white nickel finish.
- Terminals: Solder – brass, hot tinned with elongated slot.  
Screw—brass, white nickel finish.

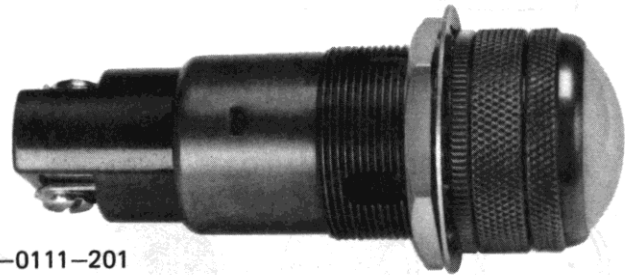

210-0901-0111-201  
Convex lens

## MECHANICAL DIMMER WITH SCREW-ON LENS CAP

	solder terminal	screw terminal (side pos.)	screw terminal (protruding pos.)
BASE PART NUMBERS	61-4001-02-201	61-0901-02-201	61-3101-02-201
CAP PART NUMBERS	COMPLETE ASSEMBLY PART NUMBERS		
<p>1-27 NS THD. (INTERNAL)</p> <p>1-9/64</p> <p>15/16 MAX.</p>	<p>210-4001-0111-201</p> <p>209-4001-0111-201</p>	<p>210-0901-0111-201</p> <p>209-0901-0111-201</p>	<p>210-3101-0111-201</p> <p>209-3101-0111-201</p>

Order complete with lamp to be assured of receiving the  
indicator light and correct lamp together for immediate use.

**WATER-TIGHT CONSTRUCTION:** The assemblies on this page may be made water-tight on the face of the panel. To specify, change the last digit in the part number suffix to 3. Example: 209-3101-0111-203.