


LAYOUT FOR P.C.B
(PER 12mm LENGTH)

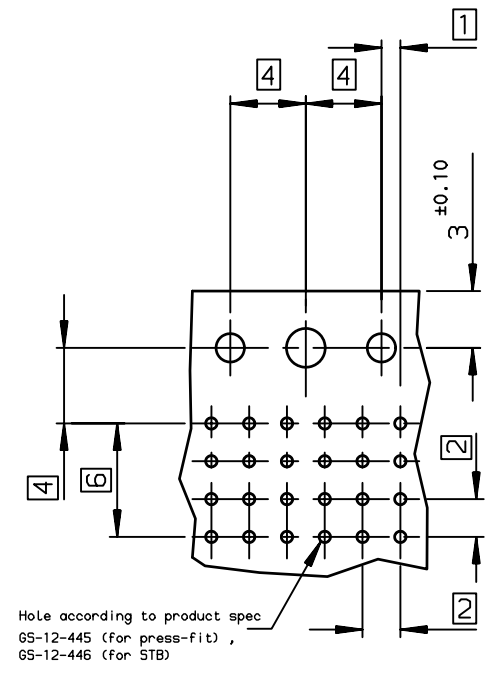

Part Number: HM1L41xDP485H6P /-----485H6PLF

MATING LENGTH DIM-P / REPLACE 'x' BY:				
	ROW-A	ROW-B	ROW-C	ROW-D
D =	6.50	6.50	6.50	6.50

NOTE-2: EYE OF THE NEEDLE PRESS FIT PIN TYPE
 NOTE-3: REAR END SUPPORT FOR BETTER ASSY ON PCB
 NOTE-4: PACKAGING IN TRAY + COVER
 IF SUFFIX "P" IS ADDED IN P/N PACKAGING IS IN TRAYS
 BUT CONNECTOR MARKING IS WITHOUT "P"
 EXAMPLE: HM1XXXXXXXXXH6P, MARKED HM1XXXXXXXXXH6
 NOTE-5: INSULATOR MATERIAL: GLASS FILLED THERMOPLASTIC MATERIAL, (VAPOR
 PHASE OR INFRARED COMPATIBLE), FLAMMABILITY
 RATING UL94-V-0.
 NOTE-6: SPECIFIC REQUIREMENT DESIGNATIONS, FOR THE ROW AND COLUMN DESIGNATION
 MARKINGS ROTATED 180 DEGREES

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
 SEE PRODUCT SPECIFICATION 6S-12-445

rev	ecn no	dr	date
E	-	LGO	2005/03/07
F	LS06-0097	LGO	2006/07/21
G	LS07-0089	LGO	2007/03/28
H	LS07-0184	MLE	2007/07/27
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	GOISNARD	27/03/07	ANGULAR	0.X ±0.1
Eng	LENOIR	2004/10/01	LINEAR	0.XX ±0.1
Chr	LEGARE	2004/10/01	0.XX' ±2'	0.XXX ±0.1
Appr	LEGARE	2004/10/01	Product family	METRAL
Title METRAL HDR WB 4R PF WITH FRONT HOUSING ROTATED 180 DEGREES				size A3
catalog no				Scale 2.5
dwg no C-8626-11262				ECN LS07-0184
Rev. H				Spec ref -
CUSTOMER				sheet 1 of 1

European Views

Copyright FCI. FCI