


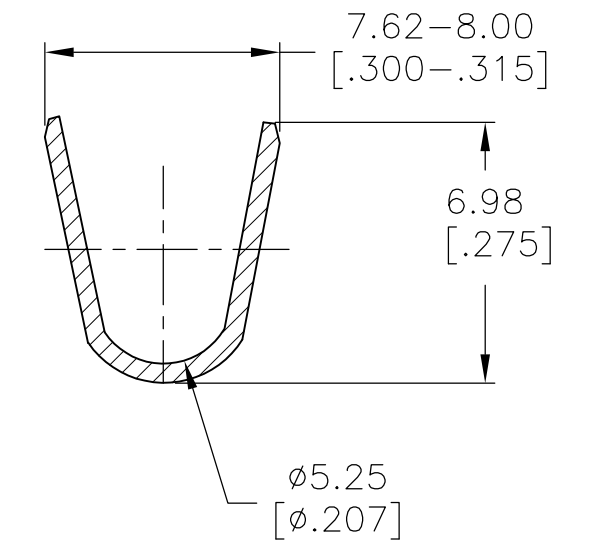


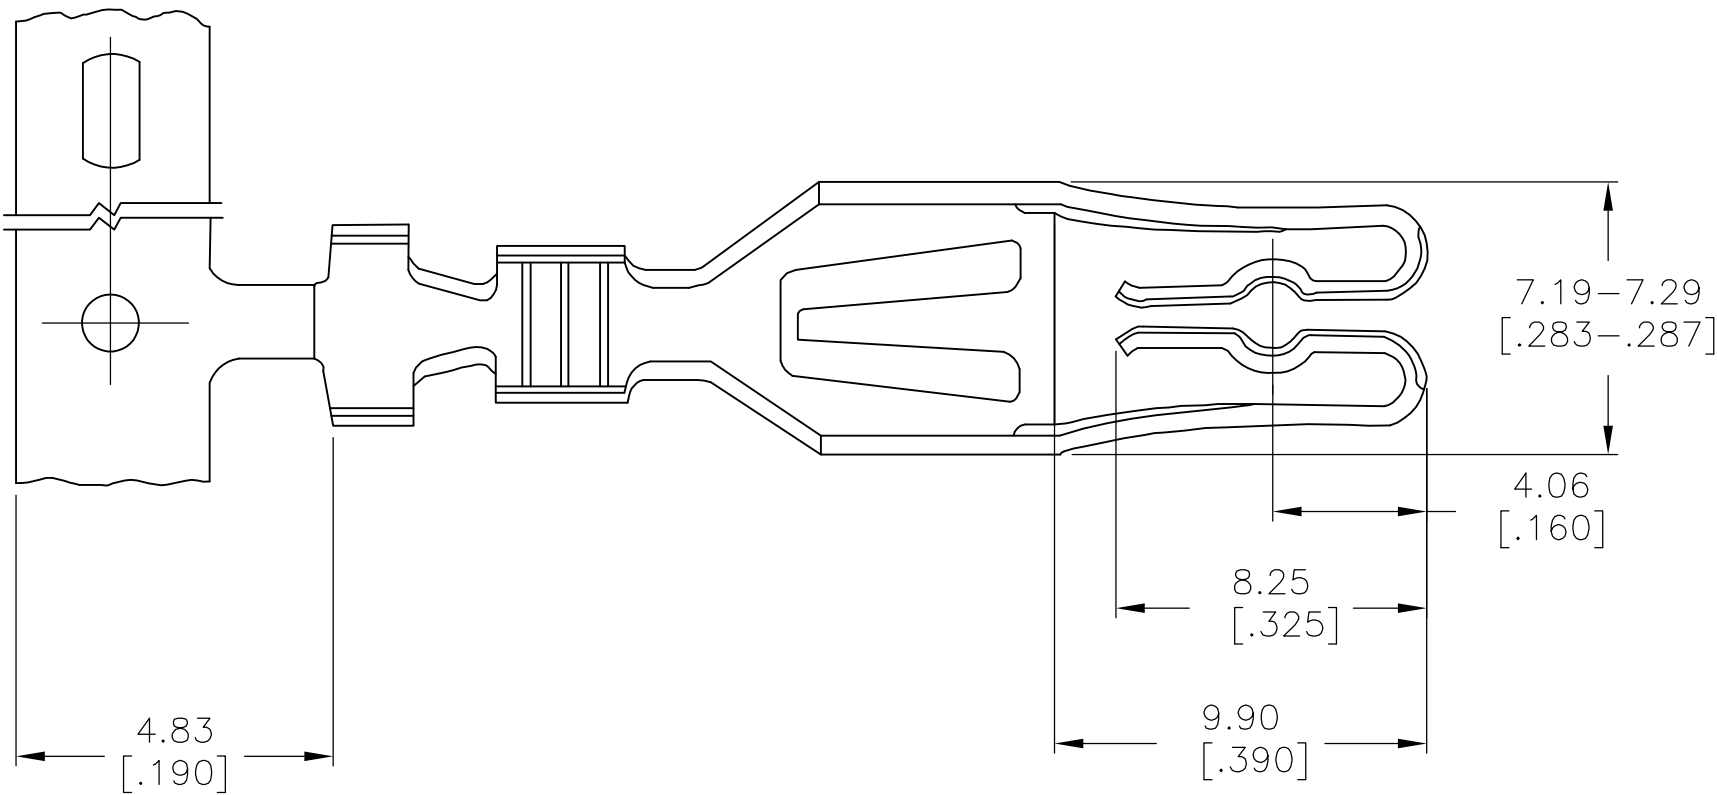

INSULATION 4.06-5.33
RANGE [.160-.210]
SECTION, A-A

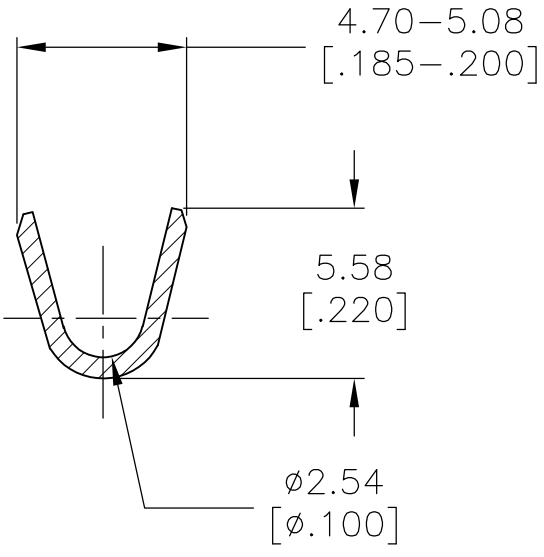

WIRE RANGE 10-12
SECTION, B-B

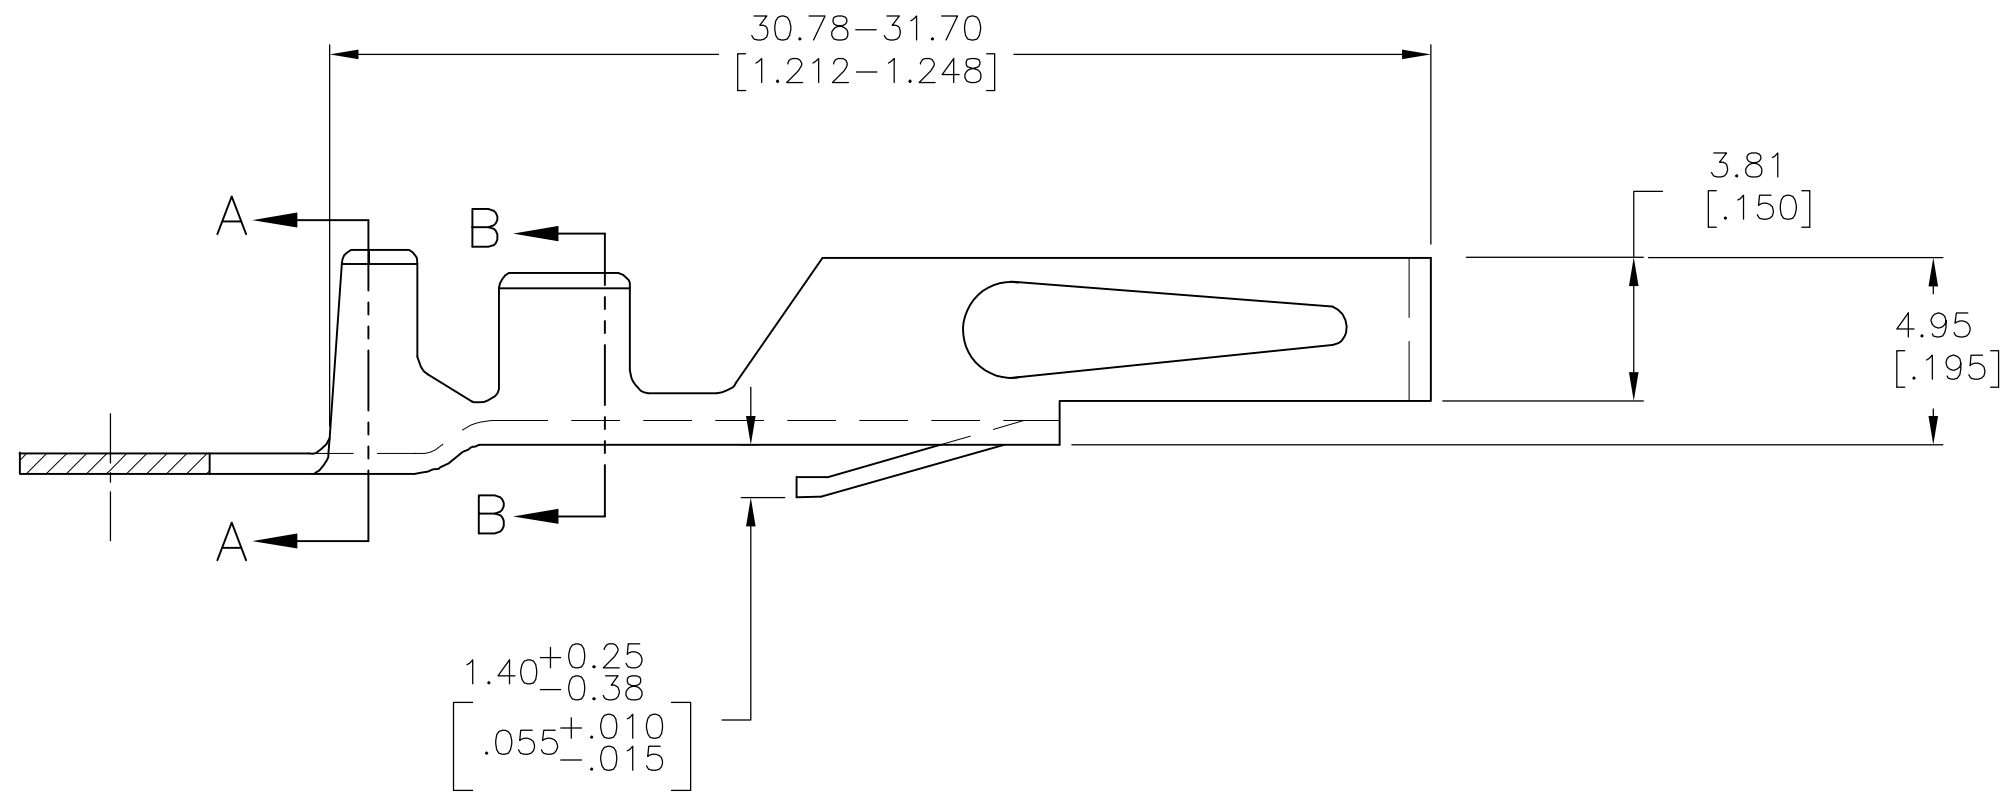

- 1 0.0038[.000150] BRIGHT TIN OVER 0.00076[.000030] NICKEL.
- 2 SILVER PLATE 0.0038[.000150] MIN THK ALL OVER.
- 3 0.0038[.000150] MATTE TIN OVER 0.00076[.000030] NICKEL.

3	5-530519-2
2	530519-3
1	530519-2
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	15 MAY 75		TE Connectivity					
		CHK	15 MAY 75							
		APVD	16 MAY 75		NAME					
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		CONTACT HIGH CURRENT STRIP 10-12 AWG				
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		APPLICATION SPEC		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
				-		A2		00779	C=530519	-
MATERIAL ALLOY CDA-194		FINISH		WEIGHT 0		CUSTOMER DRAWING		SCALE 5:1	SHEET 1 of 1	REV J