





THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

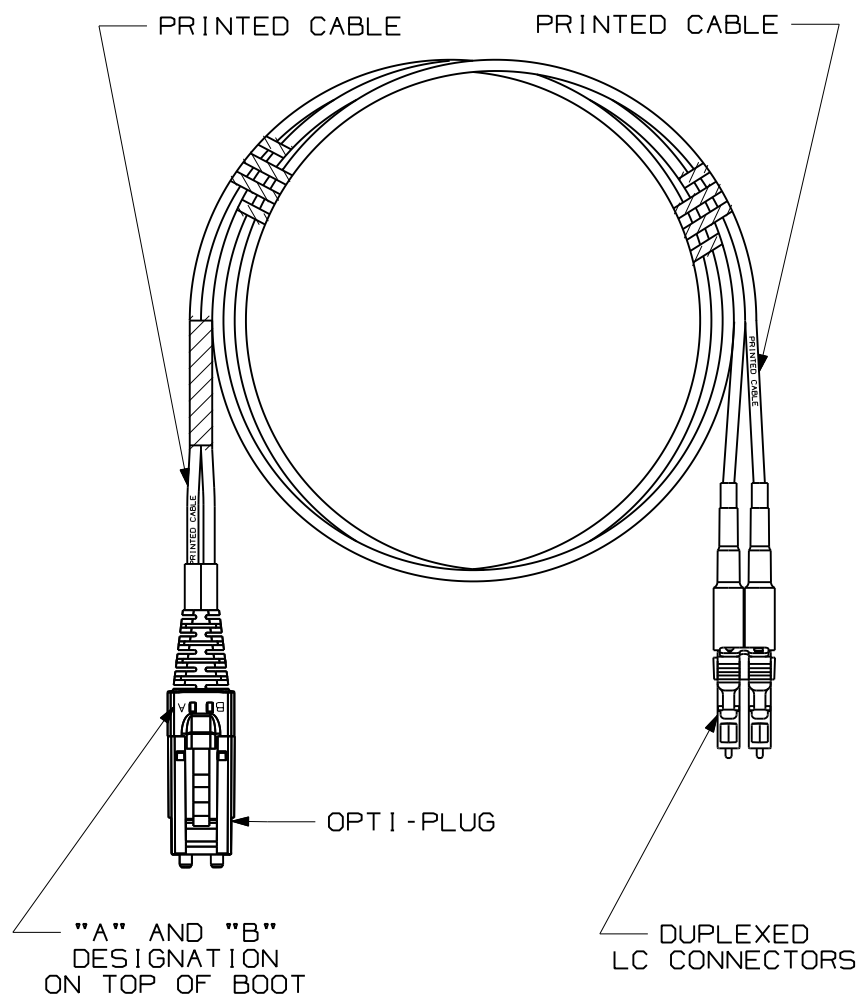

NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

										DUPLEX FIBER OPTIC PATCH CORD FJ OPTI-PLUG TO LC CONFIGURATION CUSTOMER DRAWING			
											 TINLEY PARK, ILL 60477		
										 THIRD ANGLE PROJECTION	ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED.		DRAWING FILENAME M02779BL_DC_00A.prt
											DIMENSIONAL TOLERANCES ARE: (.X) (.XXX) (.XX) ANGLES		SCALE NONE
										DRAWN BY MC	PART NO. SEE TABLE, SHT. 2		
										DATE 05-10-07	DRAWING NO. 02779-18 (SHT. 1 of 2)		
										CHK'D	SIZE A		
R	06-04-07	MC		RELEASED TO PRODUCTION	02779-18								
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH				

