
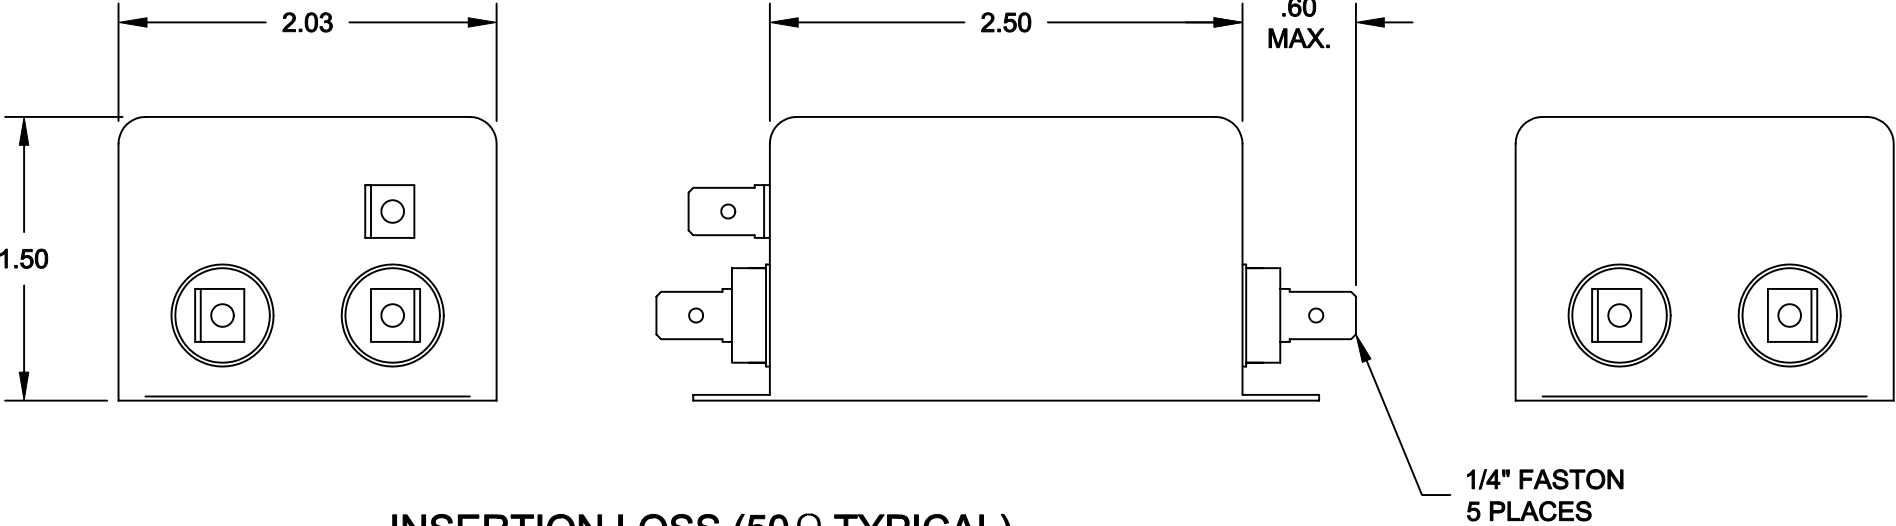


SPECIFICATIONS


1. CASE:
22 GA. (.030) CRS, TIN PLATED
2. RATED CURRENT:
5A
3. RATED VOLTAGE:
250VAC, 50/60Hz
4. TEST VOLTAGE:
LINE TO LINE: 1.7KVDC
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:
.9mA @ 250VAC, 50Hz

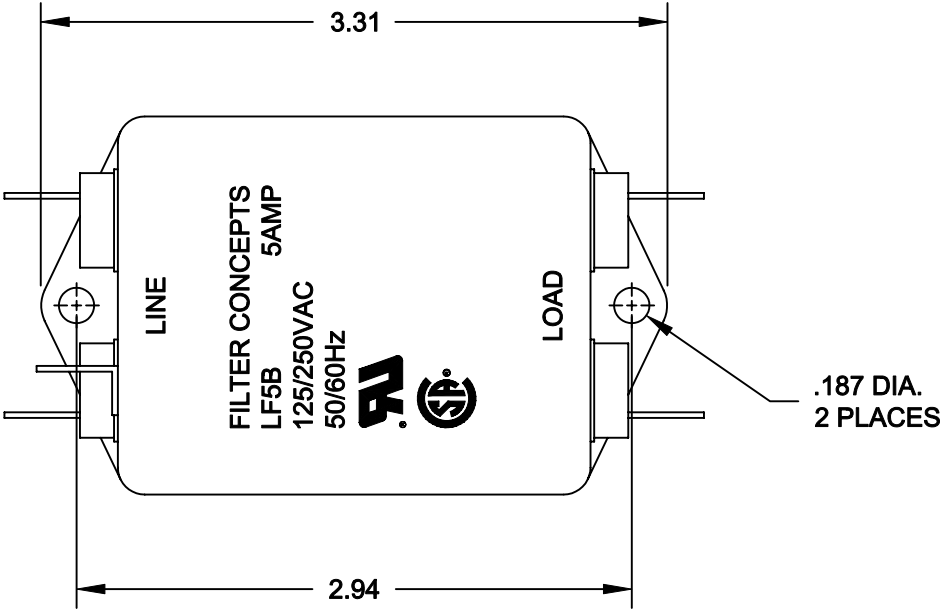

INSERTION LOSS (50 Ω TYPICAL)

	.05 MHz	.15 MHz	.50 MHz	1.5 MHz	5.0 MHz	20 MHz
L/L	6 db	34 db	60 db	60 db	60 db	60 db
L/G	18 db	30 db	48 db	56 db	56 db	50 db

SCHEMATIC

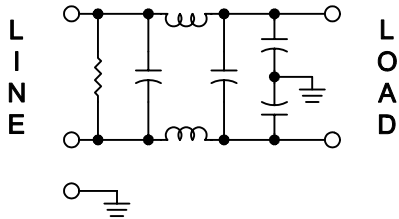

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010	CONTRACT NO.		FILTER CONCEPTS INC.		
	APPROVALS	DATE			
	DRAWN GIANG TRINH	08-20-02	APPLICATION DRAWING LF5B FILTER		
	CHECKED DANNIEL VUONG	10-23-02			
	FINISH		SIZE B	CODE IDENT NO.	DRAWING NO. 7530
			SCALE 1/1	SHEET 1	OF 1