

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0850170220

Status:

Active

Overview:

DIN 41612

Description:

2.54mm Pitch DIN 41612/EIC 603-2 Mixed Layout Connector, Male Style M (Hybrid type), Inverse Press-Fit, 0.60µm Gold (Au) Selective, 32 Circuits, Lead-Free

Documents:


3D Model

Drawing (PDF)

Product Specification PS-85013-0002 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Backplane Connectors
Series	85017
Application	Backplane
Comments	Mixed Layout
Component Type	PCB Header
Overview	DIN 41612
Product Name	IEC 603-2/DIN 41612
Style	M
UPC	800753856325
Physical	
Circuits (Loaded)	32
Circuits (maximum)	32
Circuits Detail	24 SignAl , 8 Power
Color - Resin	Gray
Durability (mating cycles max)	400
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	7.722/g
Number of Columns	8
Number of Pairs	Open Pin Field
Number of Rows	3
Orientation	Vertical
PC Tail Length	5.80mm
PCB Locator	No
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	0.610µm
Plating min - Termination	0.406µm
Polarized to PCB	No
Stackable	Yes
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +125°C

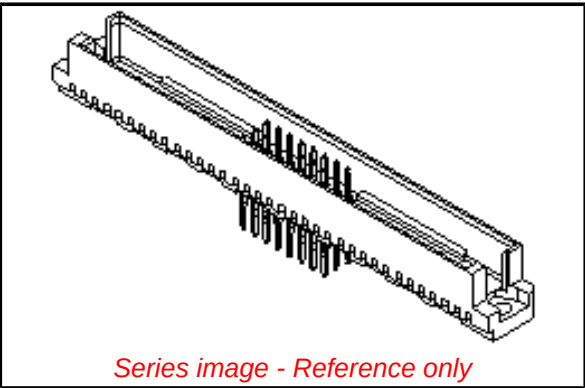

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Contains SVHC(2014 December 17): No

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

Search Parts in this Series

85017 Series

Mates With

85048 Straight Female Style M Receptacle.
85056 Straight Female Style M "inverse" Receptacle

Use With

85023 DIN 41612 Coaxial Contact

Termination Interface: Style	Through Hole - Compliant Pin
Electrical	
Current - Maximum per Contact	1.5A
Data Rate	622.0 Mbps
Voltage - Maximum	250V AC (RMS)
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-85013-0002
Sales Drawing	603-6093-25, SD-85017-005

This document was generated on 07/07/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION