



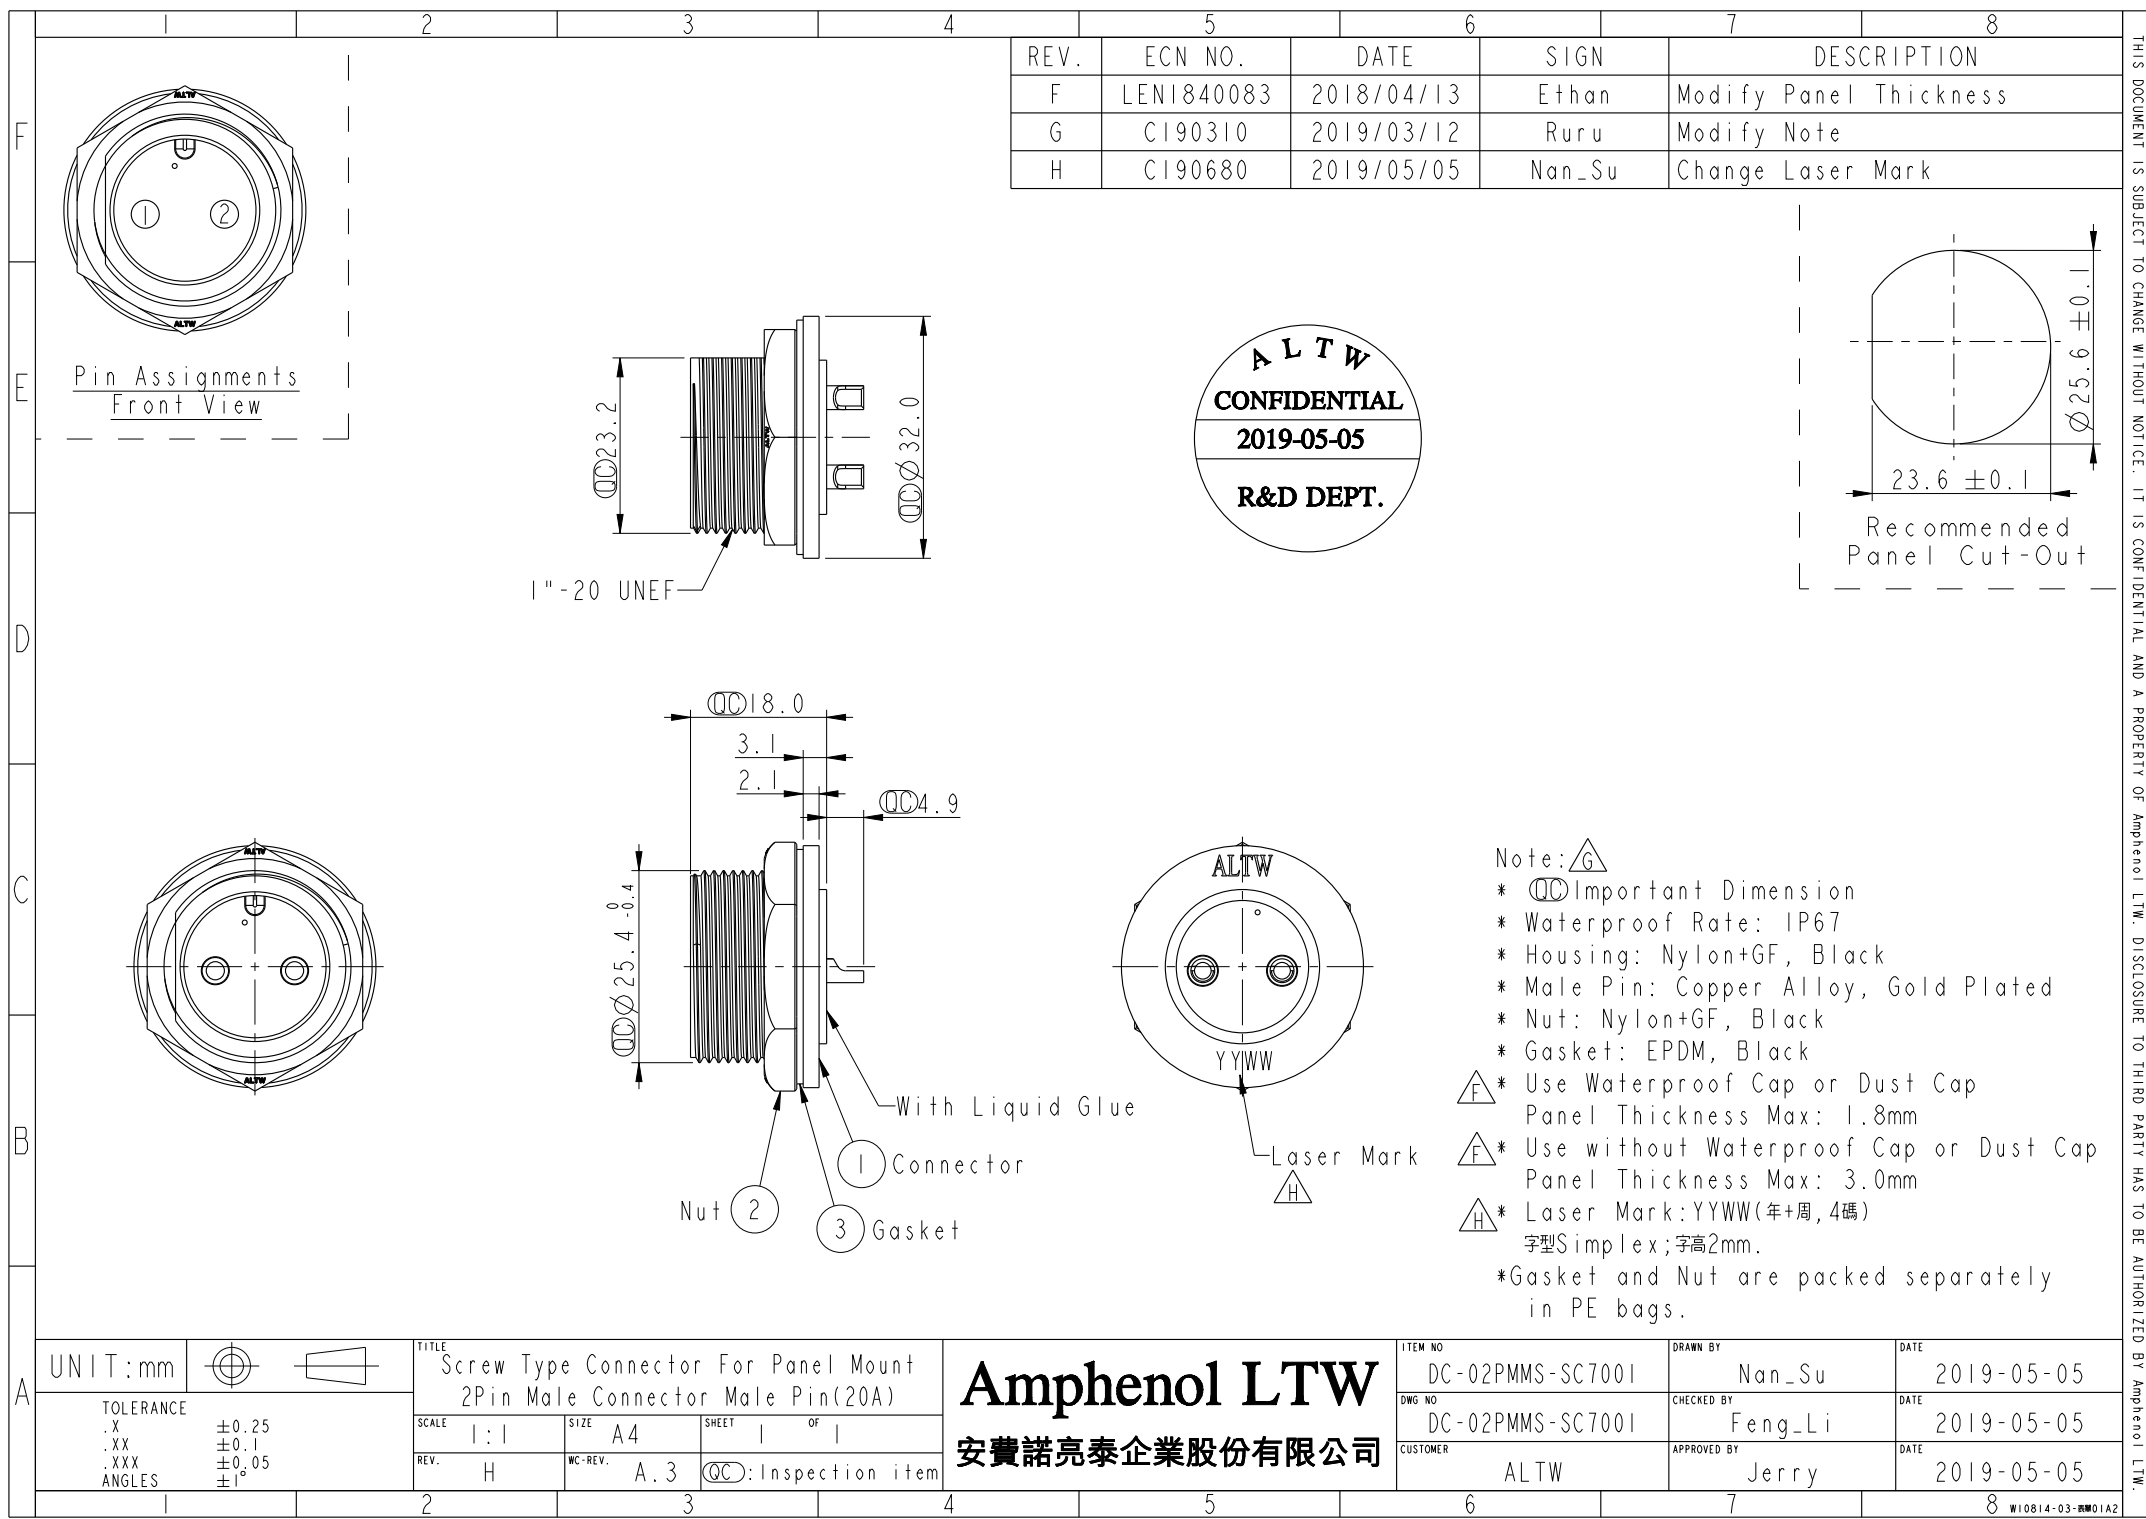

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
F	LEN1840083	2018/04/13	Ethan	Modify Panel Thickness
G	CI90310	2019/03/12	Ruru	Modify Note
H	CI90680	2019/05/05	Nan_Su	Change Laser Mark

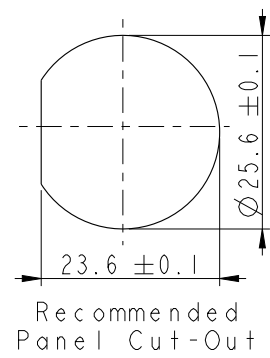

- Note: $\triangle$
- * $\varnothing$ Important Dimension
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Nut: Nylon+GF, Black
 - * Gasket: EPDM, Black
 - $\triangle F$ * Use Waterproof Cap or Dust Cap
Panel Thickness Max: 1.8mm
 - $\triangle F$ * Use without Waterproof Cap or Dust Cap
Panel Thickness Max: 3.0mm
 - $\triangle H$ * Laser Mark: YYWW(年+周, 4碼)
字型Simplex; 字高2mm.
 - *Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE Screw Type Connector For Panel Mount 2Pin Male Connector Male Pin(20A)		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO DC-02PMMS-SC7001	DRAWN BY Nan_Su	DATE 2019-05-05
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1	SIZE A4	SHEET 1 OF 1		DWG NO DC-02PMMS-SC7001	CHECKED BY Feng-Li	DATE 2019-05-05
REV. H		WC-REV. A.3	$\varnothing$ Inspection item			CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-05-05