

D






C

B


A

27.43	1.080
20.32	.800
14.73	.580
11.68	.460
7.62	.300
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	

4805 (3/11)

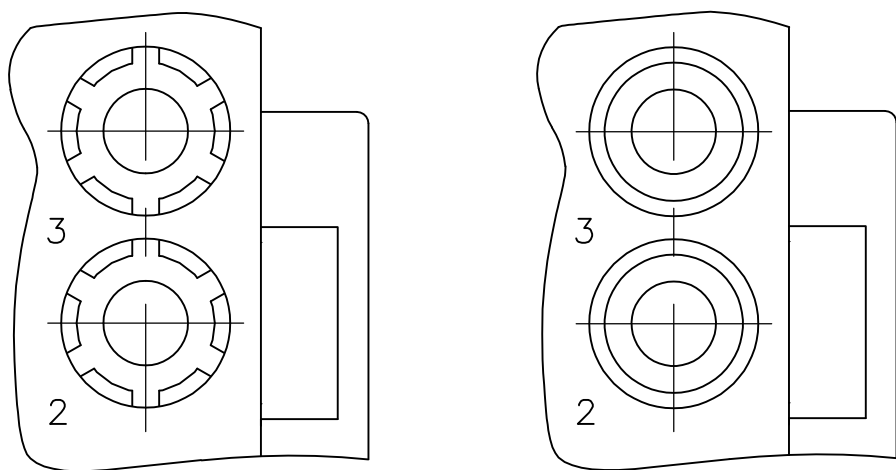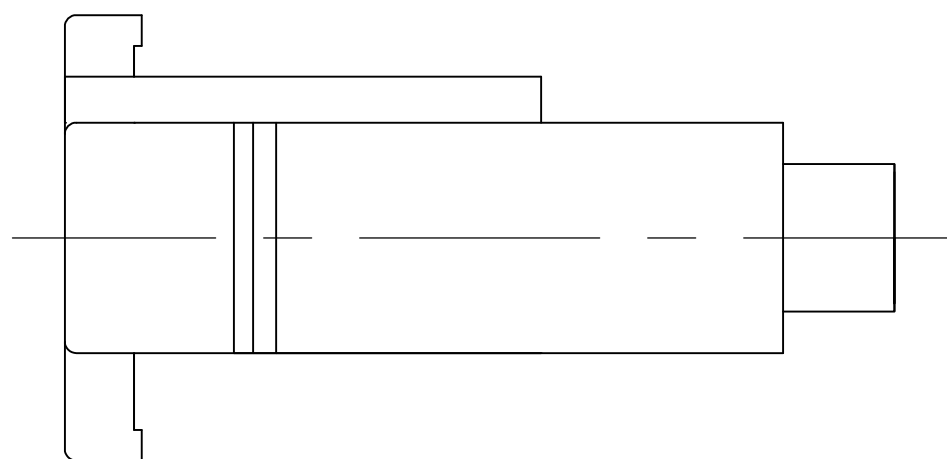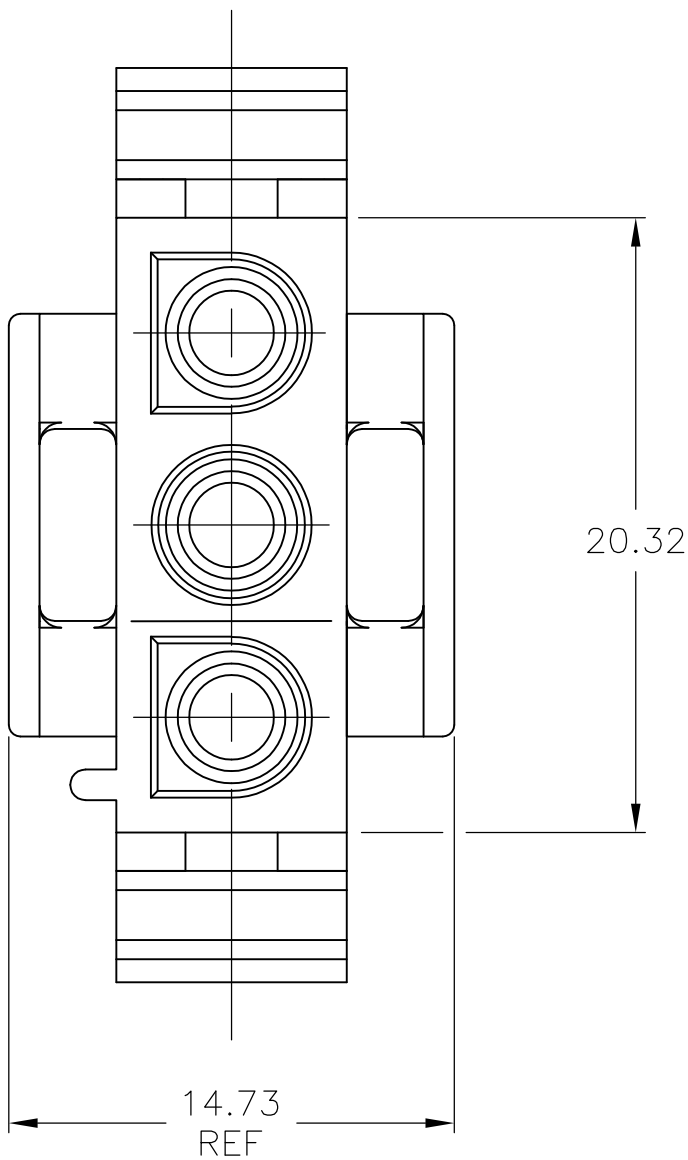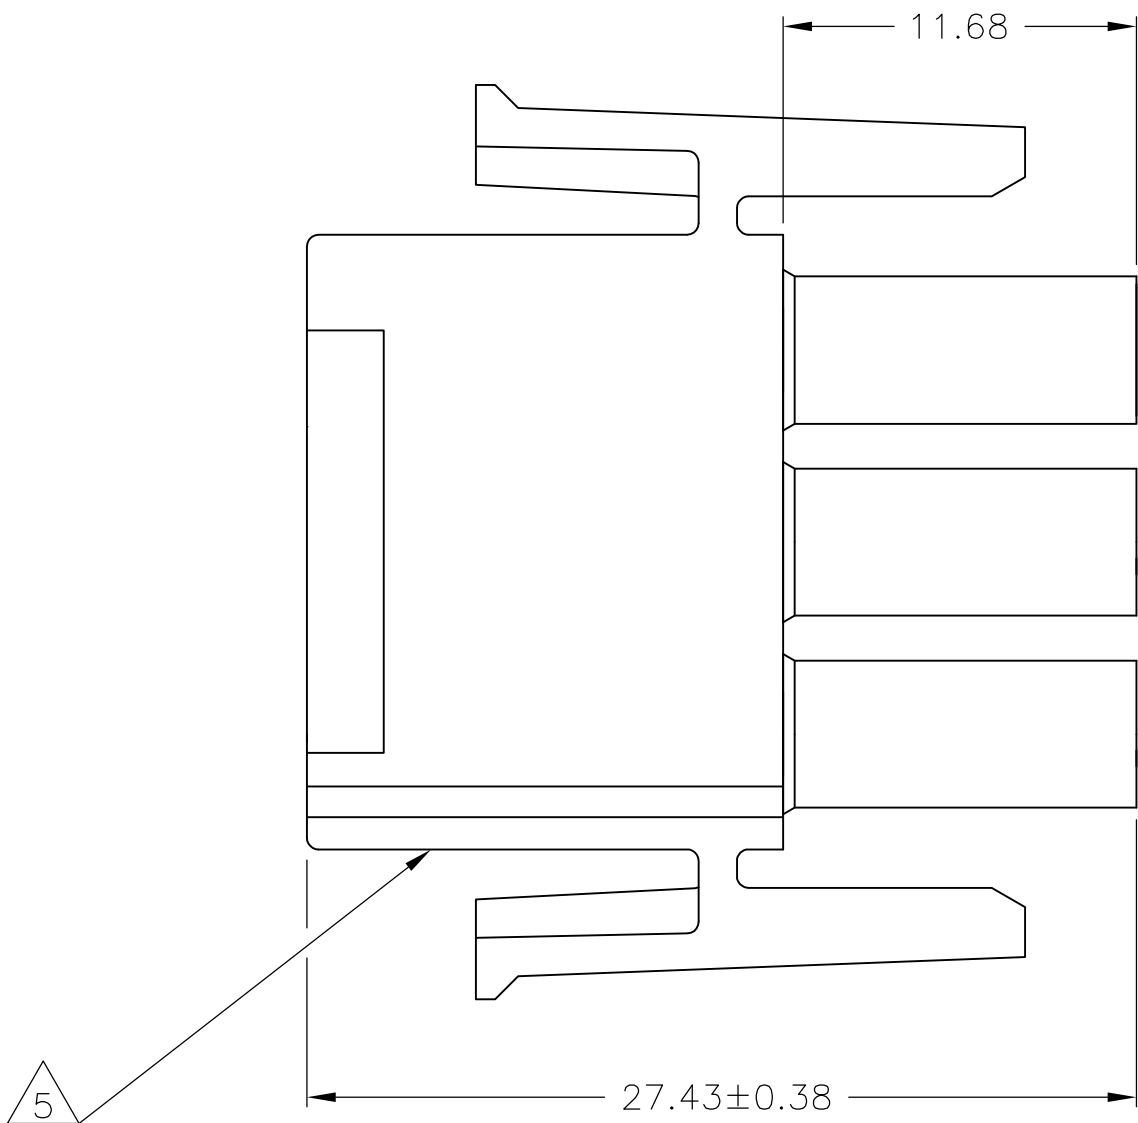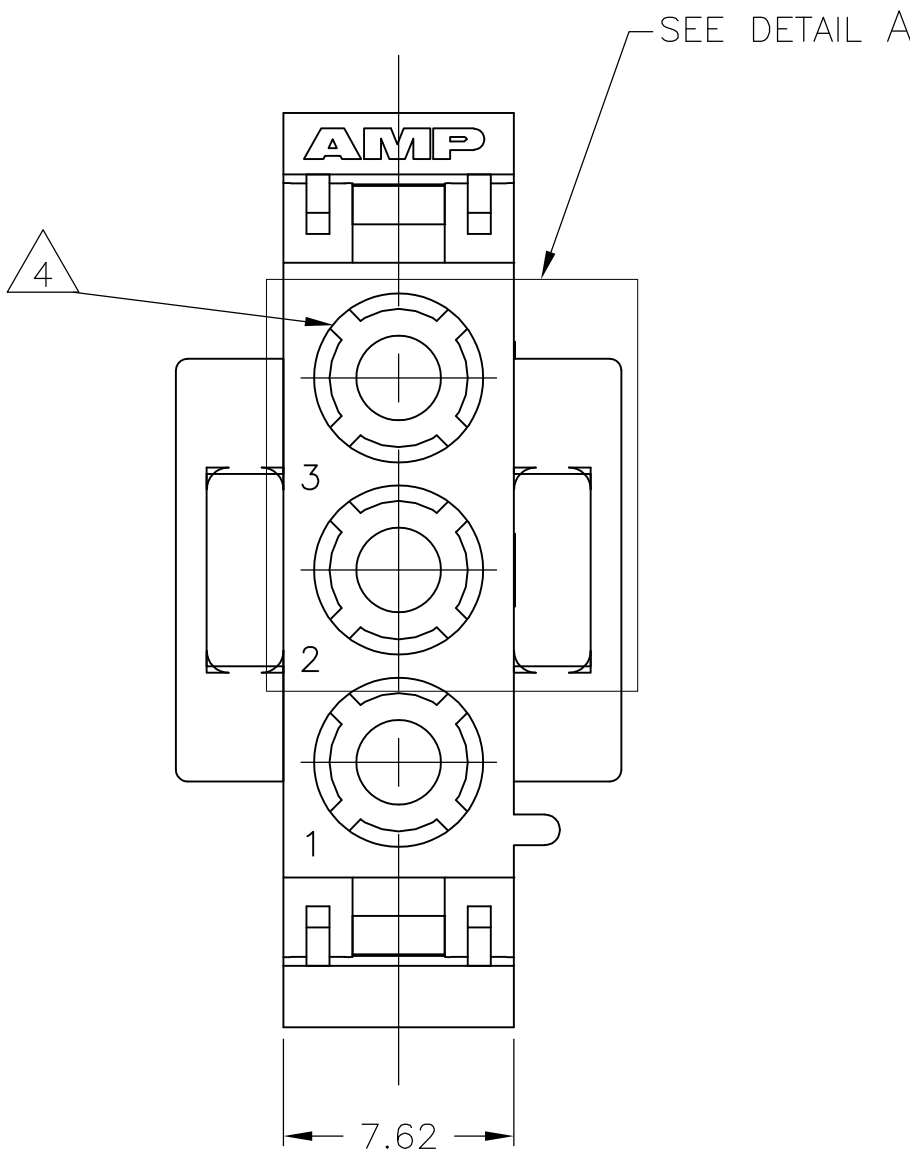

DETAIL A
OPTIONAL CONSTRUCTION





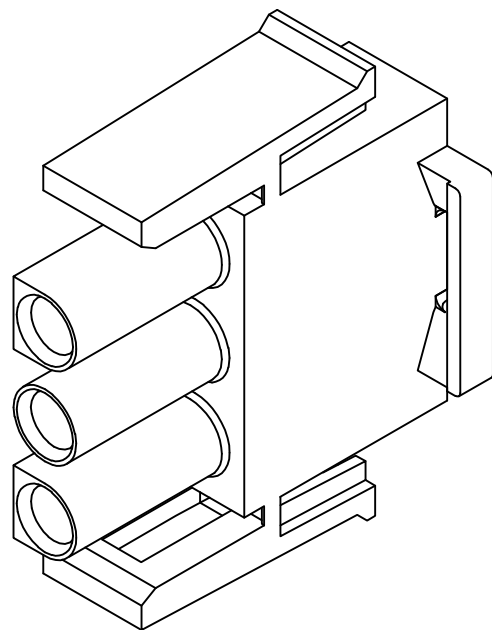


3-DIMENSIONAL MODEL
NTS

BLACK	1-480700-9
GREY	1-480700-8
BLUE	1-480700-6
GREEN	1-480700-5
YELLOW	1-480700-4
ORANGE	1-480700-3
RED	1-480700-2
BROWN	1-480700-1
NATURAL	1-480700-0
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL 18JAN95	TE Connectivity	
DIMENSIONS: mm		CHK R. SWING 18JAN95	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. SELF 18JAN95	PLUG, 3 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)	
0. PLC ± - 1. PLC ± - 2. PLC ± 0.13 3. PLC ± - 4. PLC ± - ANGLES ± 0° 30'		PRODUCT SPEC APPLICATION SPEC	SIZE A1	
MATERIAL NYLON, UL 94V-2		WEIGHT	CAGE CODE 00779	
FINISH -		CUSTOMER DRAWING	SCALE 4:1	
			SHEET 1 OF 2	
			REV AR2	

LOC	DIST	REVISIONS				
CM	53	REV	LTR	DESCRIPTION	DATE	OWN
		—	—	SEE SHEET 1	—	—

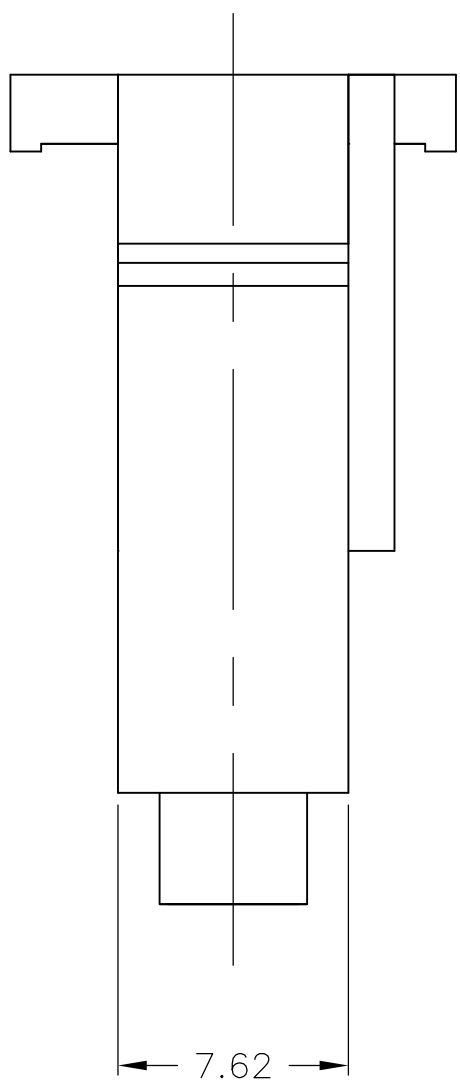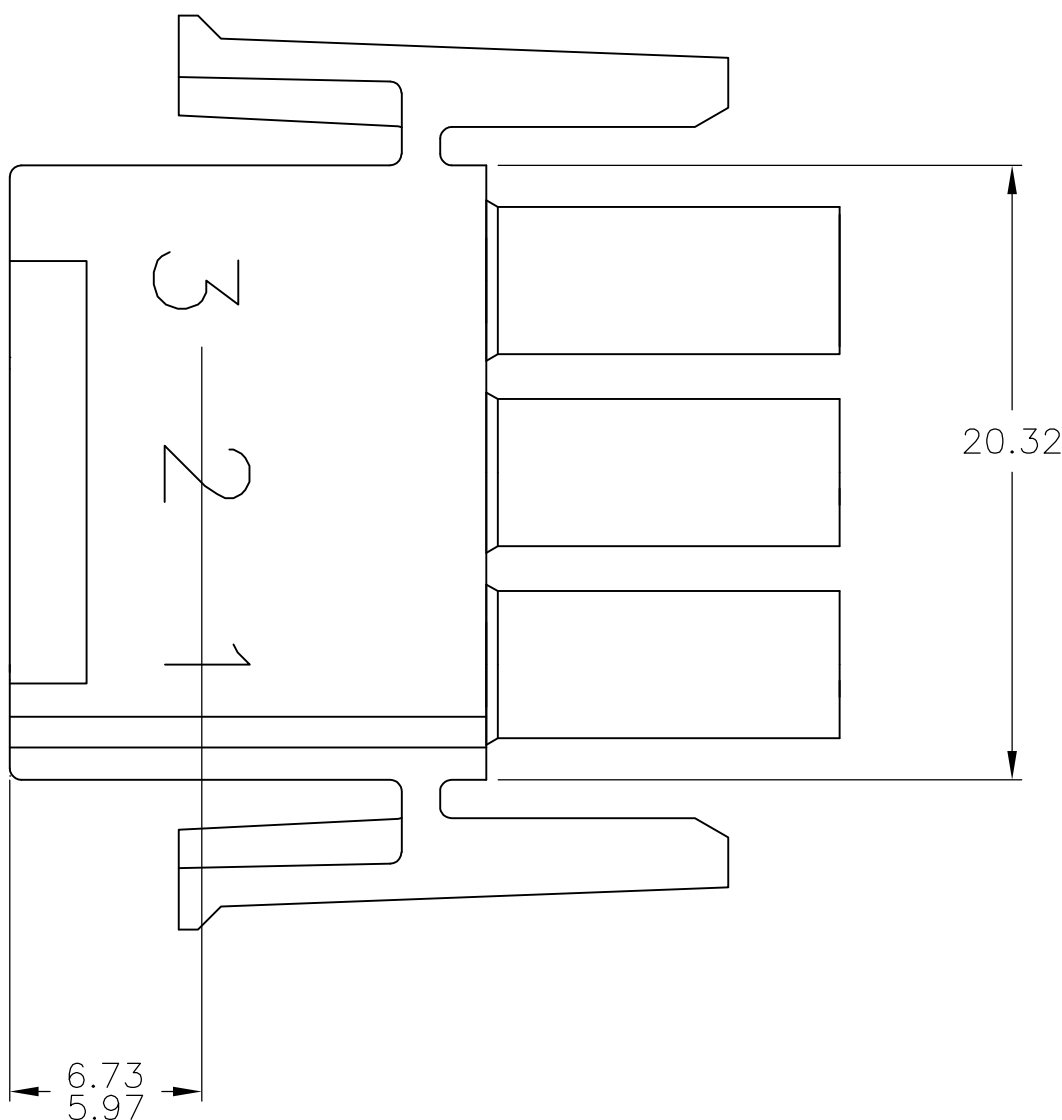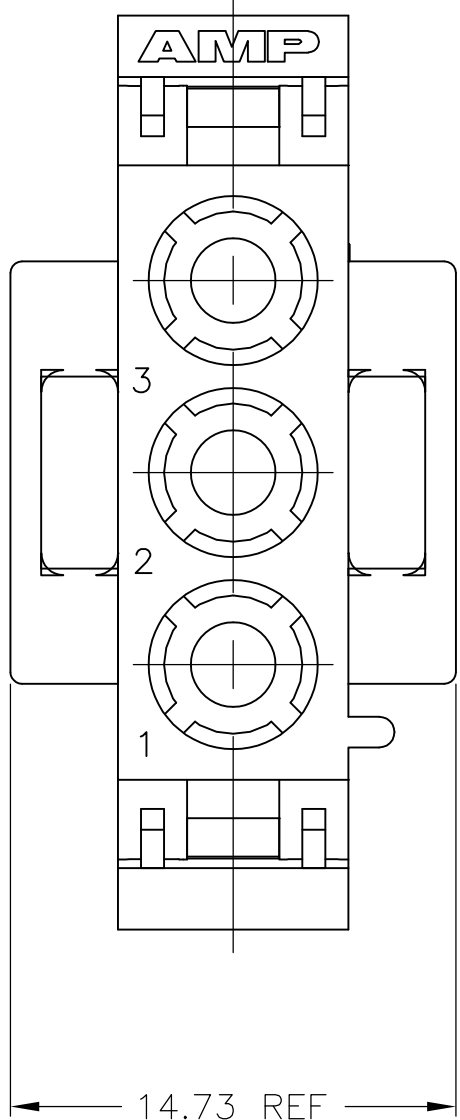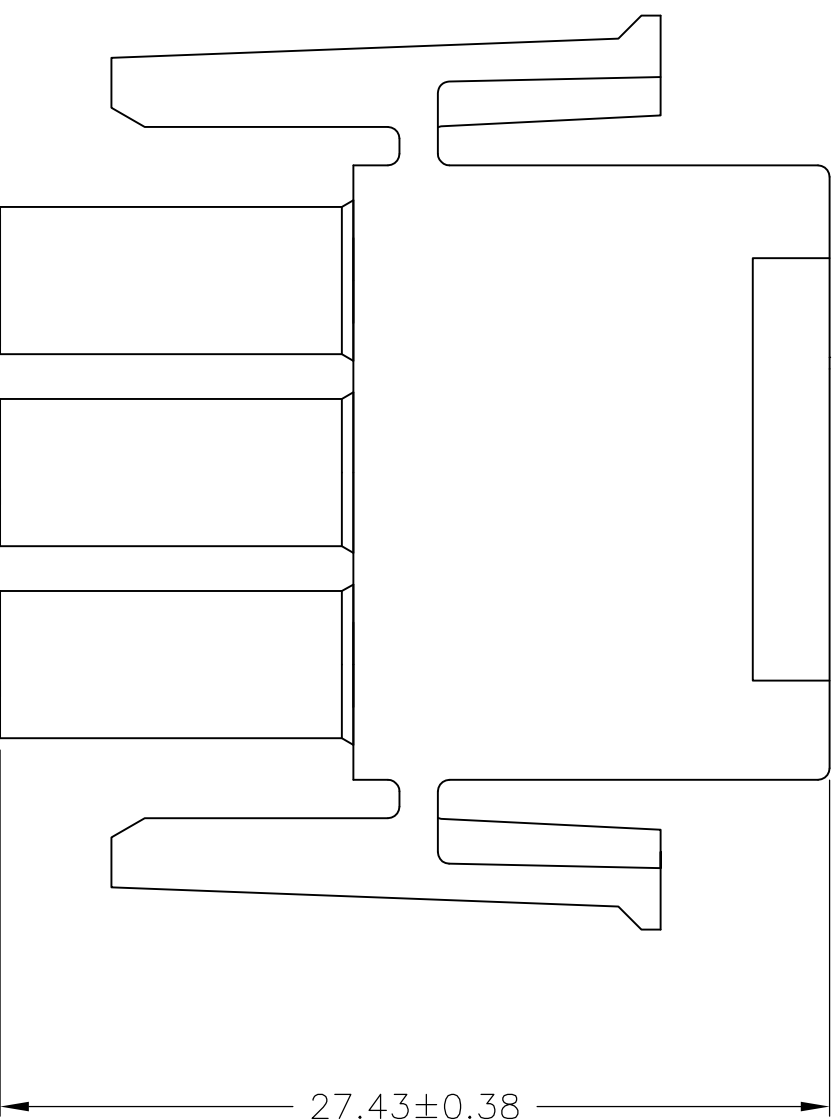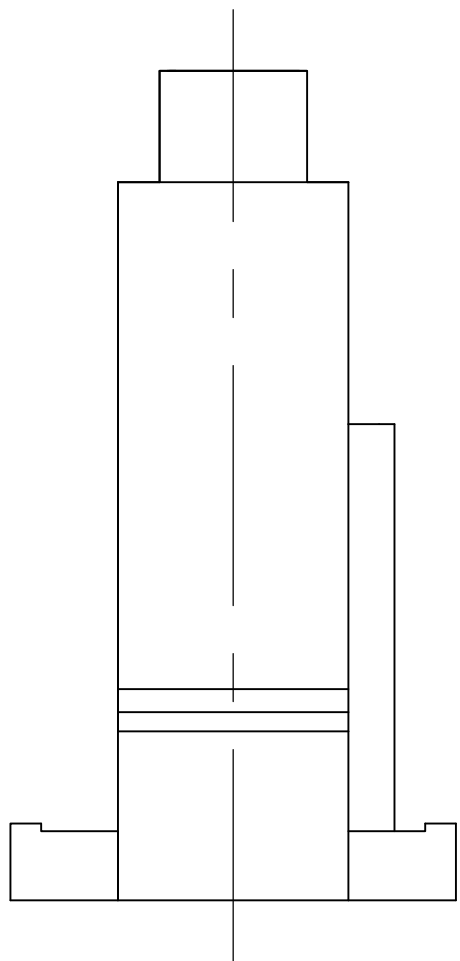

1. STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
2. CHARACTERS TO BE POSITIONED ON HOUSING TO BE READ FROM WIRE END ONLY.
3. VIOLET, BLACK, BROWN AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS.
ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

6.73	.265	—	—
5.97	.235	27.43	1.080
3.18	.125	20.32	.800
0.38	.015	14.73	.580
0.13	.005	7.62	.300
MM	IN	MM	IN

CONVERSION TABLE

NATURAL	2-480700-0
COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL CHK R. SWING APVD D. SELF	18JAN95	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0. PLC	± .—	PLUG, 3 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)	
		1. PLC	± .—		
		2. PLC	± 0.13		
		3. PLC	± .—	SIZE	
		4. PLC	± .—		
		ANGLES	± 0° 30'	DRAWING NO	
		FINISH	—		
MATERIAL NYLON, UL 94V-2		WEIGHT		RESTRICTED TO	
		CUSTOMER DRAWING		SCALE 4:1	
				SHEET 2 OF 2	
				REV AR2	