


Low force position detector


FILE No. C.PN.HOM.0007.FR
INERIS No. 18408/05

Equipment intended for use in potentially
explosive atmospheres conforming to
Directive 94/9/EC

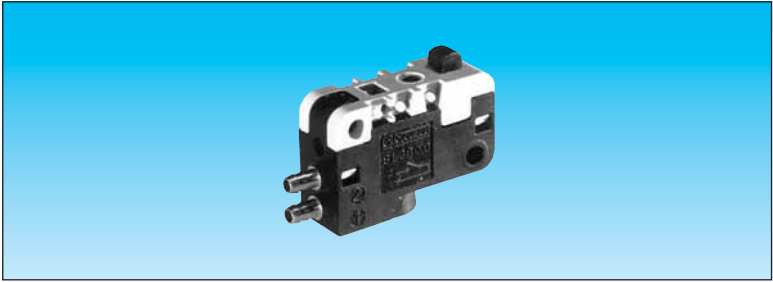

Function	NO	81 290 506	—
	NC	—	81 290 006
Classification	CE II 2 G c IIB T6 X		

Symbol




Characteristics


Orifice diameter mm		2	2
Operating pressure	bar	2 → 8	2 → 8
Flow at 4 bars	NI/min	100	100
Activation force at 6 bars	g	< 50	< 50
Permissible fluids (air / inert gas)		●	●
Max/min of fluid temperatures	°C	-10 → +50	-10 → +50
operating	°C	-10 → +60	-10 → +60
storage	°C	-40 → +70	-40 → +70
Mechanical life at 6 bars	operation	10 ⁷	10 ⁷
Response on activation	ms	≤ 15	≤ 15
time on release	ms	≤ 15	≤ 15
Barb connection for semi-rigid tubing		2.7 x 4	2.7 x 4
Weight	g	8.5	8.5

Principle of operation NC

Desactivated




Activated




Operation accessories

Unless otherwise requested, flat and roller-ended levers
are supplied loose.

161 A
flat R 25.4
70 507 524




161 E
with roller R 24.1
70 507 529




Dimensions


DIN 41635 Form A

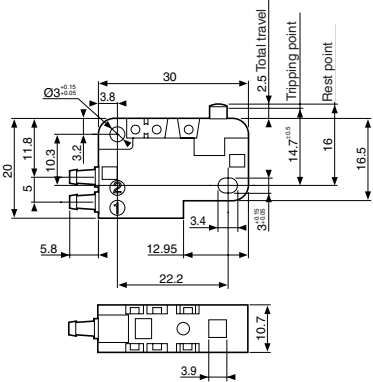

161 A
R 25.4 ±0,2



161 A
R 24.1 ±0,2



To order an  product, you must complete the form on page 53.