
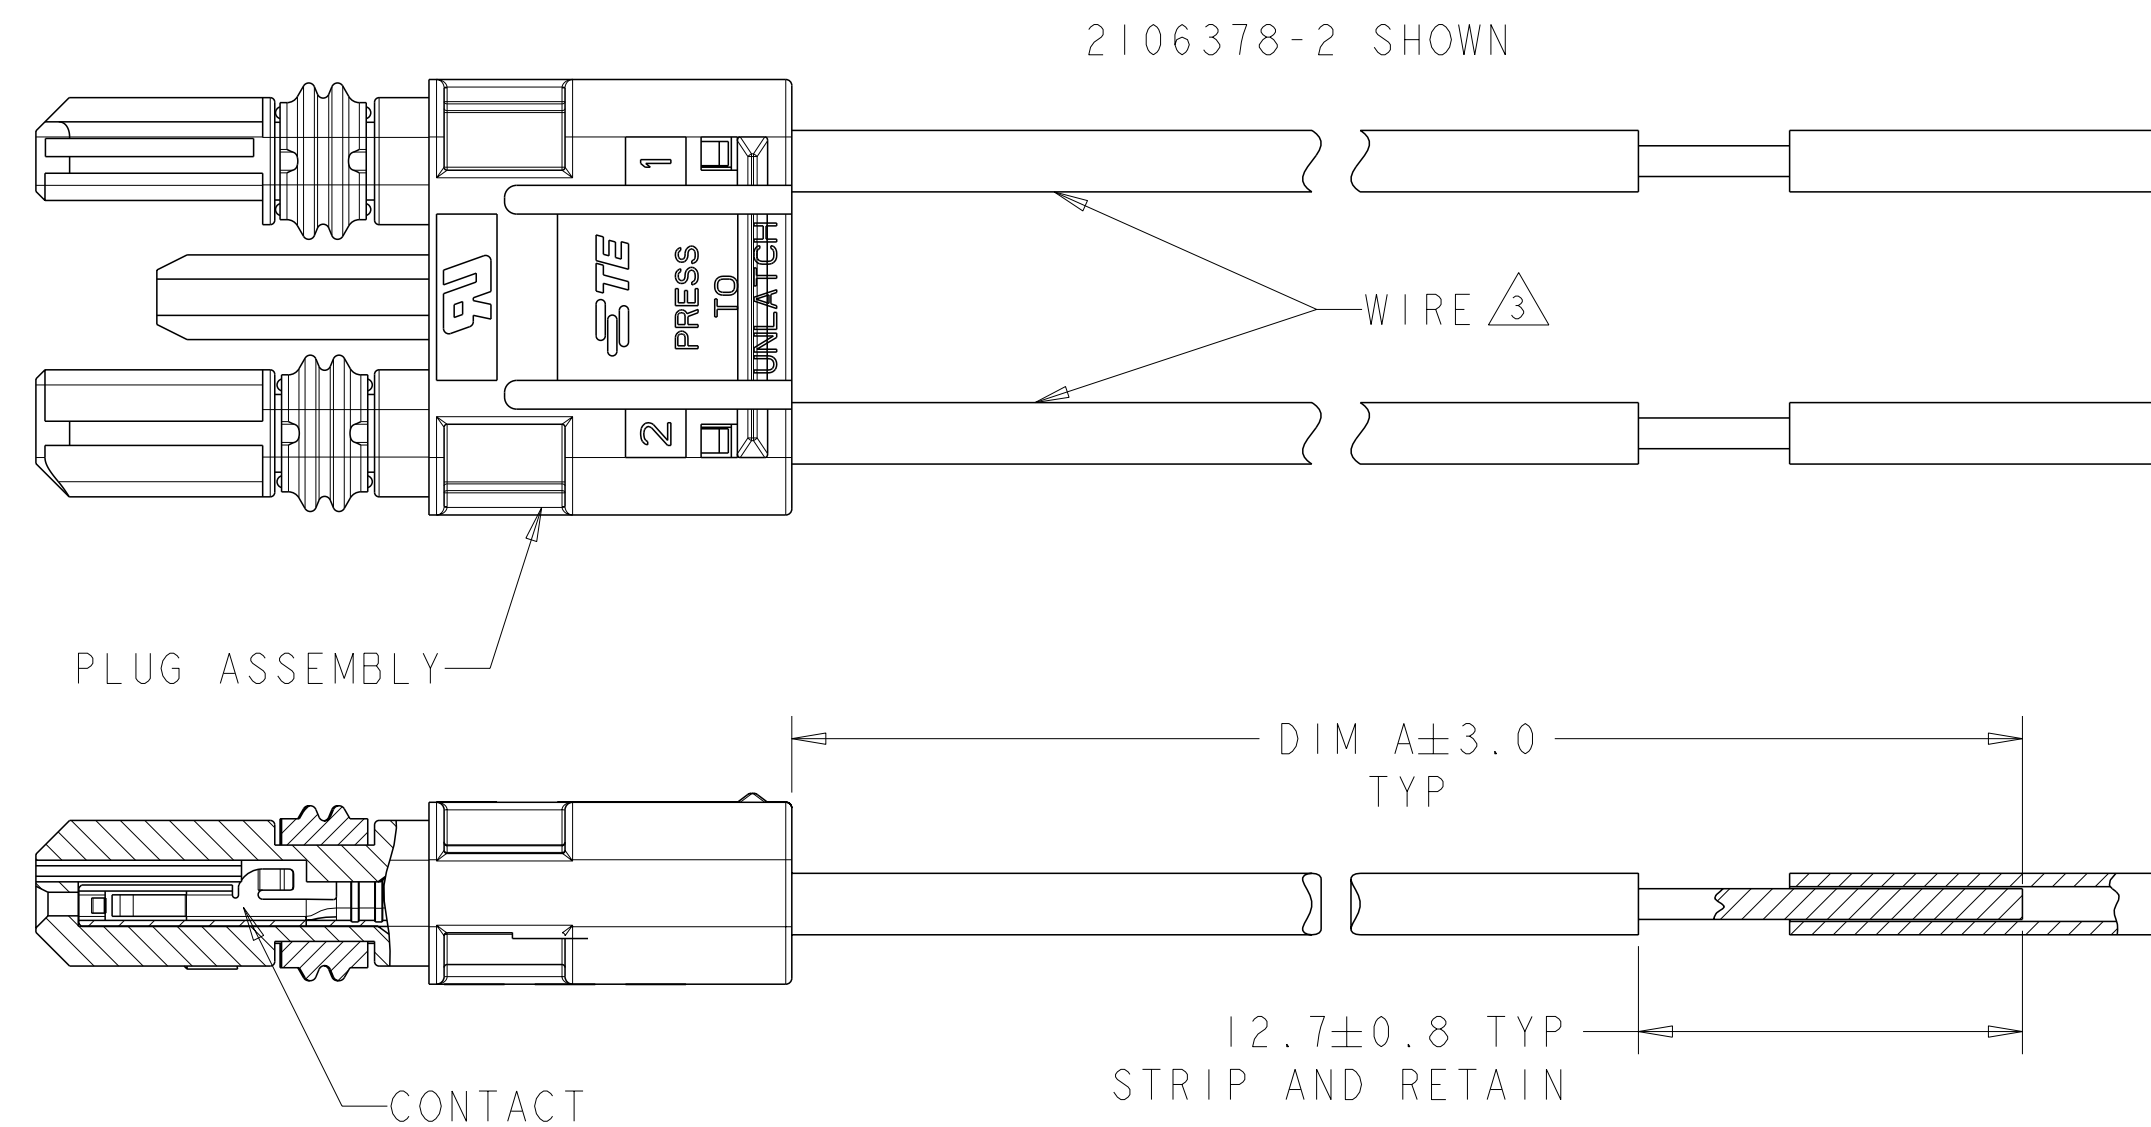


LOC -	DIST -	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			H	ECR-14-017704	13NOV2013	TB	DM
			J	ECR-14-004110	18MAR2014	JX	DM

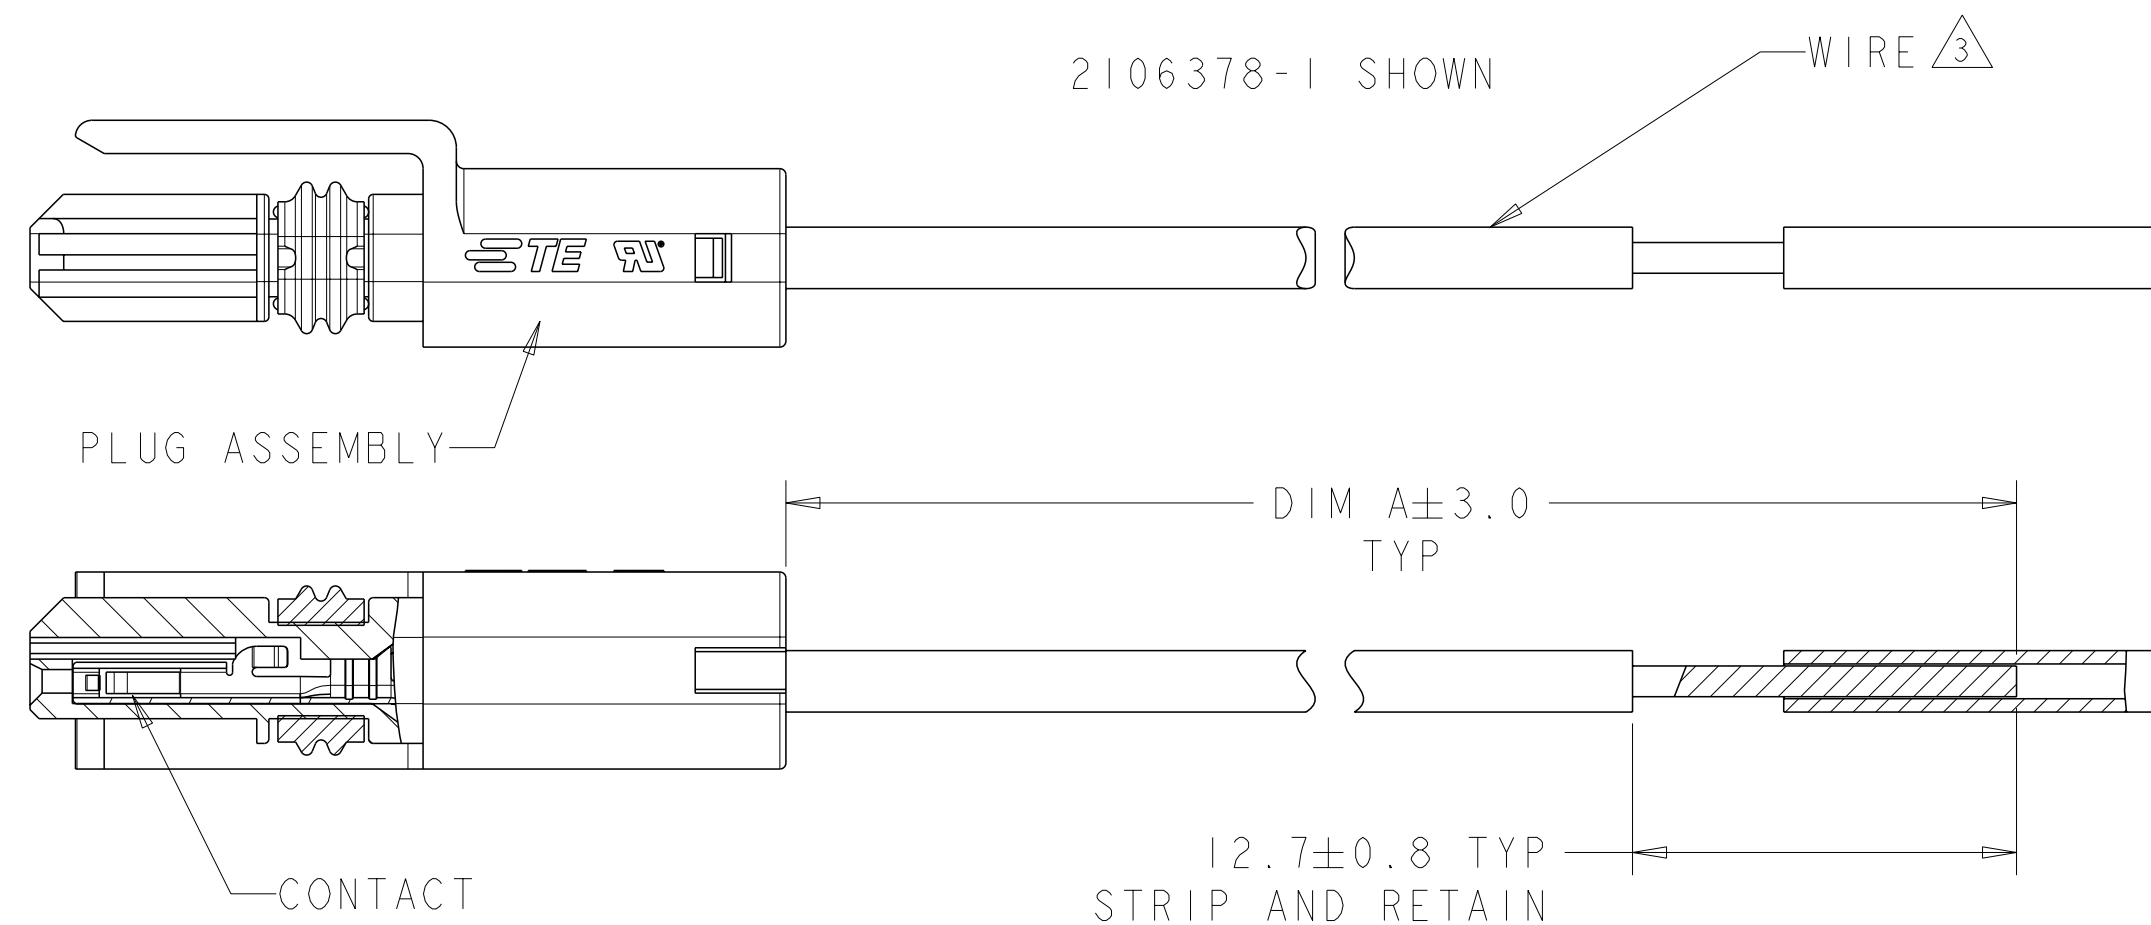


WIRE COLOR CHART

4	-	-	-	BLUE	-	-	BLUE	-	-	BLUE	-	-	BLUE	-	-	BLUE	-	-	BLUE	-	-	BLUE	-	-	BLUE	-
3	-	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-	WHITE	WHITE	-
2	-	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	BLACK
1	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	BLACK	RED
POS	-1	-2	-3	-4	-5	-6	-7	-8	-9	-10	-11	-12	-13	-14	-15	-16	-17	-18	-19	-20	-21	-22	-23	-24	-25	-26


4	-	-	-	-	-	-	BLUE	-	-	-
3	-	-	-	-	-	-	WHITE	-	-	BLACK
2	-	RED	-	-	RED	-	RED	RED	RED	BLUE
1	-	BLACK	-	-	BLACK	-	BLACK	BLACK	BLACK	RED
POS	-27	-28	-29	-30	-31	-32	-33	-34	-35	-36

- ① MATERIALS AND FINISH:
-CONTACTS: COPPER ALLOY
FINISH: TIN IN CONTACT AREA OVER NICKEL UNDERPLATE
-WIRE: 18 AWG, STRANDED, UL 1007 STYLE
2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
- ③ REFERENCE CHART FOR SPECIFIC WIRE COLOR/POSITION.
- ④ CONTACTS 0.000381 THK GOLD STRIPE PRE-PLATED STOCK, REF.

4 4 4	45.0	20AWG	4	3-2106378-6
	2000.0	20 AWG	2	3-2106378-5
	5000.0	18 AWG	2	3-2106378-4
	304.8	20 AWG	4	3-2106378-3
	304.8	20 AWG	2	3-2106378-1
	101.6	20 AWG	2	2-2106378-8
	381.0	18 AWG	2	2-2106378-6
	304.8	24 AWG	4	2-2106378-5
	304.8	24 AWG	3	2-2106378-4
	304.8	24 AWG	2	2-2106378-3
	101.6	24 AWG	4	2-2106378-2
	101.6	24 AWG	3	2-2106378-1
	101.6	24 AWG	2	2-2106378-0
	304.8	22 AWG	4	1-2106378-9
	304.8	22 AWG	3	1-2106378-8
	304.8	22 AWG	2	1-2106378-7
	101.6	22 AWG	4	1-2106378-6
	101.6	22 AWG	3	1-2106378-5
	101.6	22 AWG	2	1-2106378-4
	304.8	20 AWG	4	1-2106378-3
	304.8	20 AWG	3	1-2106378-2
	304.8	20 AWG	2	1-2106378-1
	101.6	20 AWG	4	1-2106378-0
	101.6	20 AWG	3	2106378-9
	101.6	20 AWG	2	2106378-8
	304.8	18 AWG	4	2106378-7
	304.8	18 AWG	3	2106378-6
	304.8	18 AWG	2	2106378-5
101.6	18 AWG	4	2106378-4	
101.6	18 AWG	3	2106378-3	
101.6	18 AWG	2	2106378-2	
101.6	18 AWG	1	2106378-1	
	DIM A	WIRE SIZE	POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 16APR2009		 TE Connectivity	
		CHK M MOSTOLLER 16APR2009			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.2 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± MATERIAL FINISH		NAME CABLE ASSEMBLY, PLUG, SLIMSEAL SSL CONNECTOR	
		APVD M MOSTOLLER 16APR2009 PRODUCT SPEC - APPLICATION SPEC -		SIZE A2	
		WEIGHT -		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-2106378	
				RESTRICTED TO -	
				SCALE 1:1	
				SHEET OF 4	
				REV 	

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

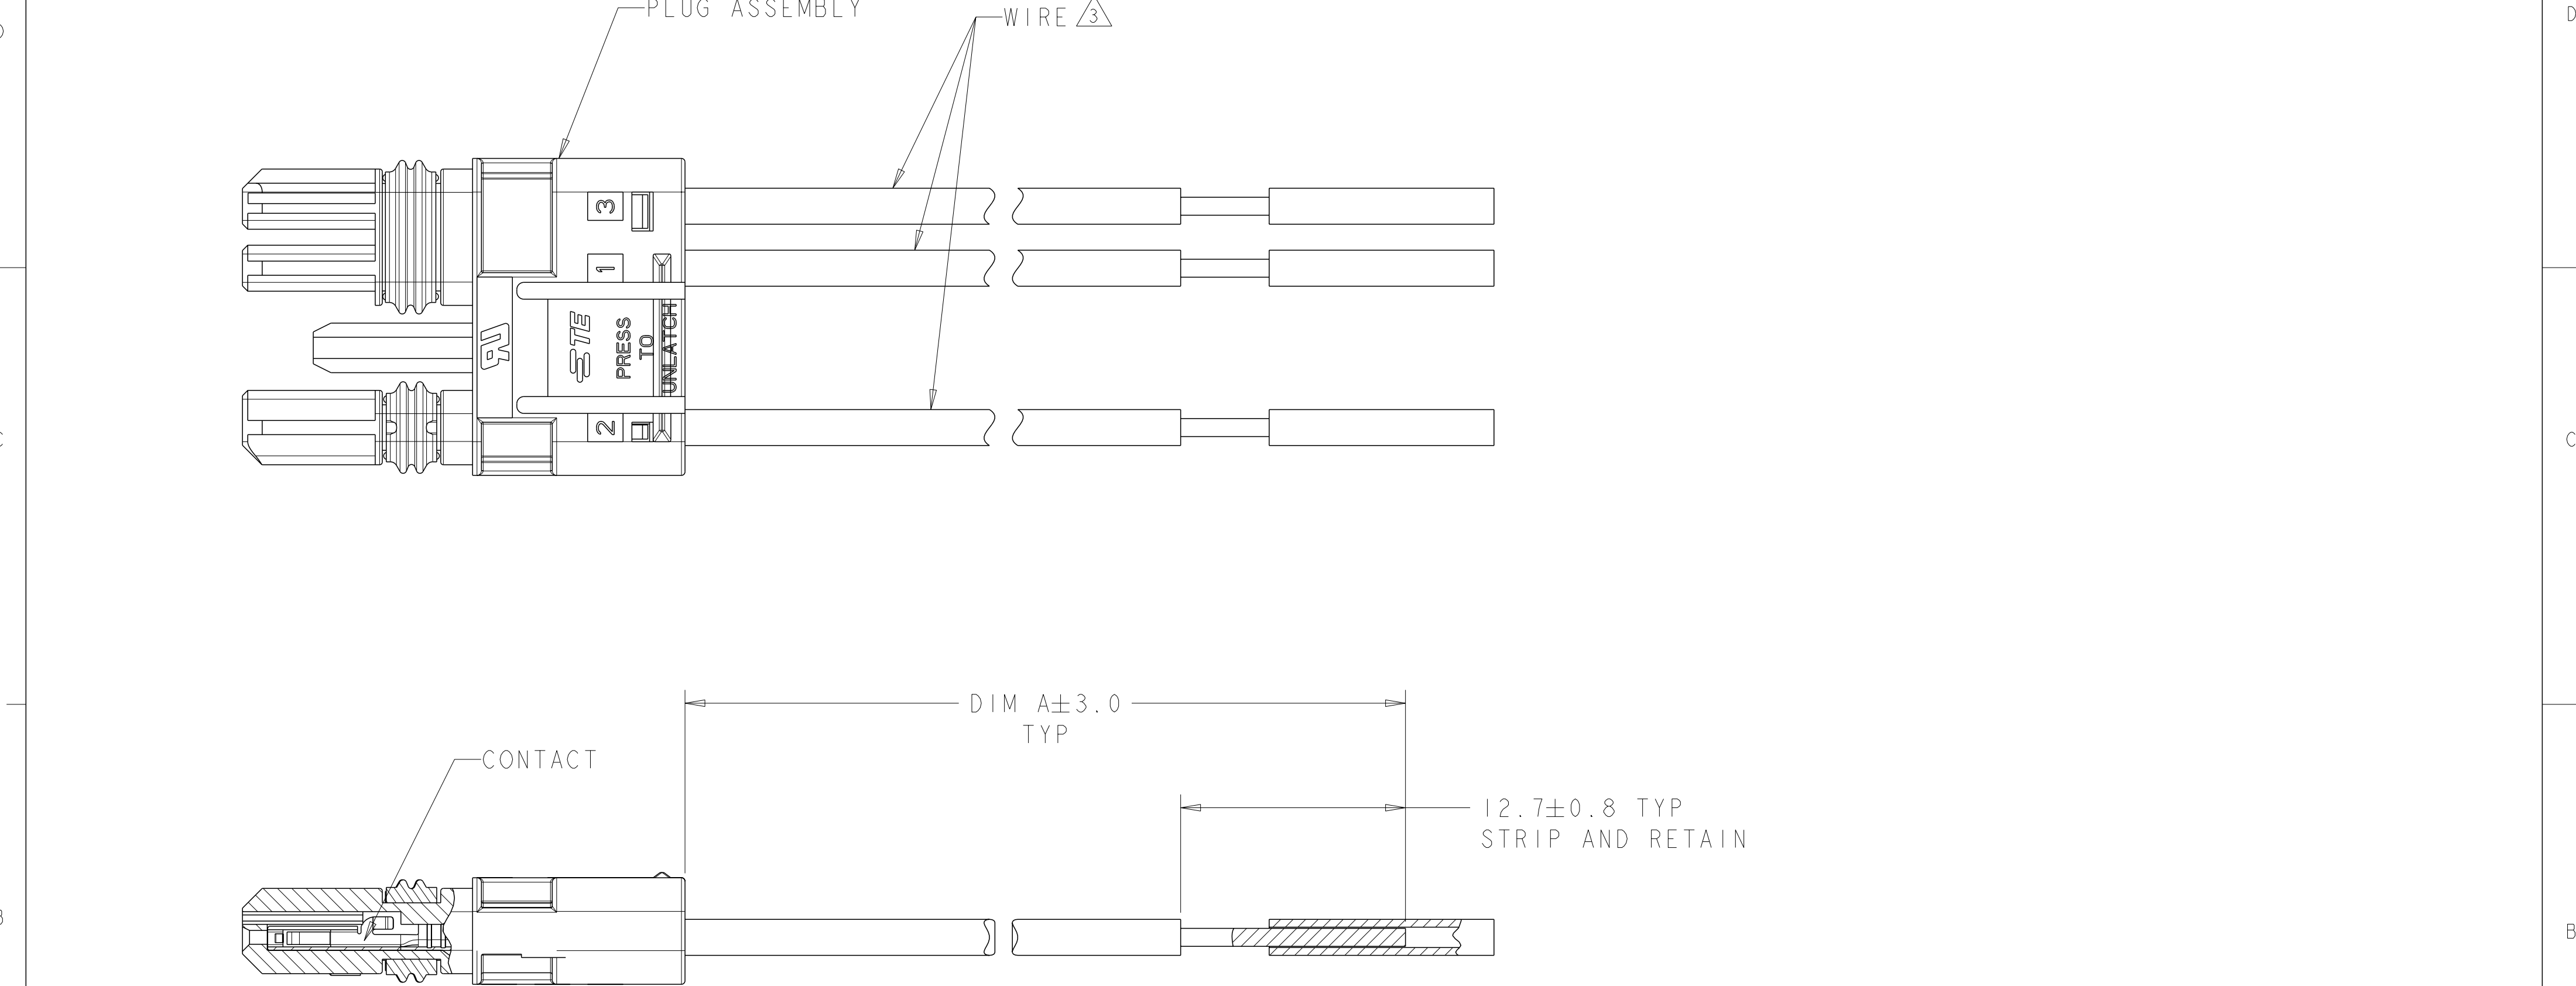

2106378-3 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm$

1 PLC ± 0.2

2 PLC $\pm$

3 PLC $\pm$

4 PLC $\pm$

ANGLES $\pm$

FINISH

MATERIAL

-

DWN R BROWN 16APR2009

CHK M MOSTOLLER 16APR2009

APVD M MOSTOLLER 16APR2009

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

NAME

CABLE ASSEMBLY, PLUG, SLIMSEAL SSL CONNECTOR

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A200779


C-2106378

-

SCALE 1:1

SHEET 2 OF 4

REV J

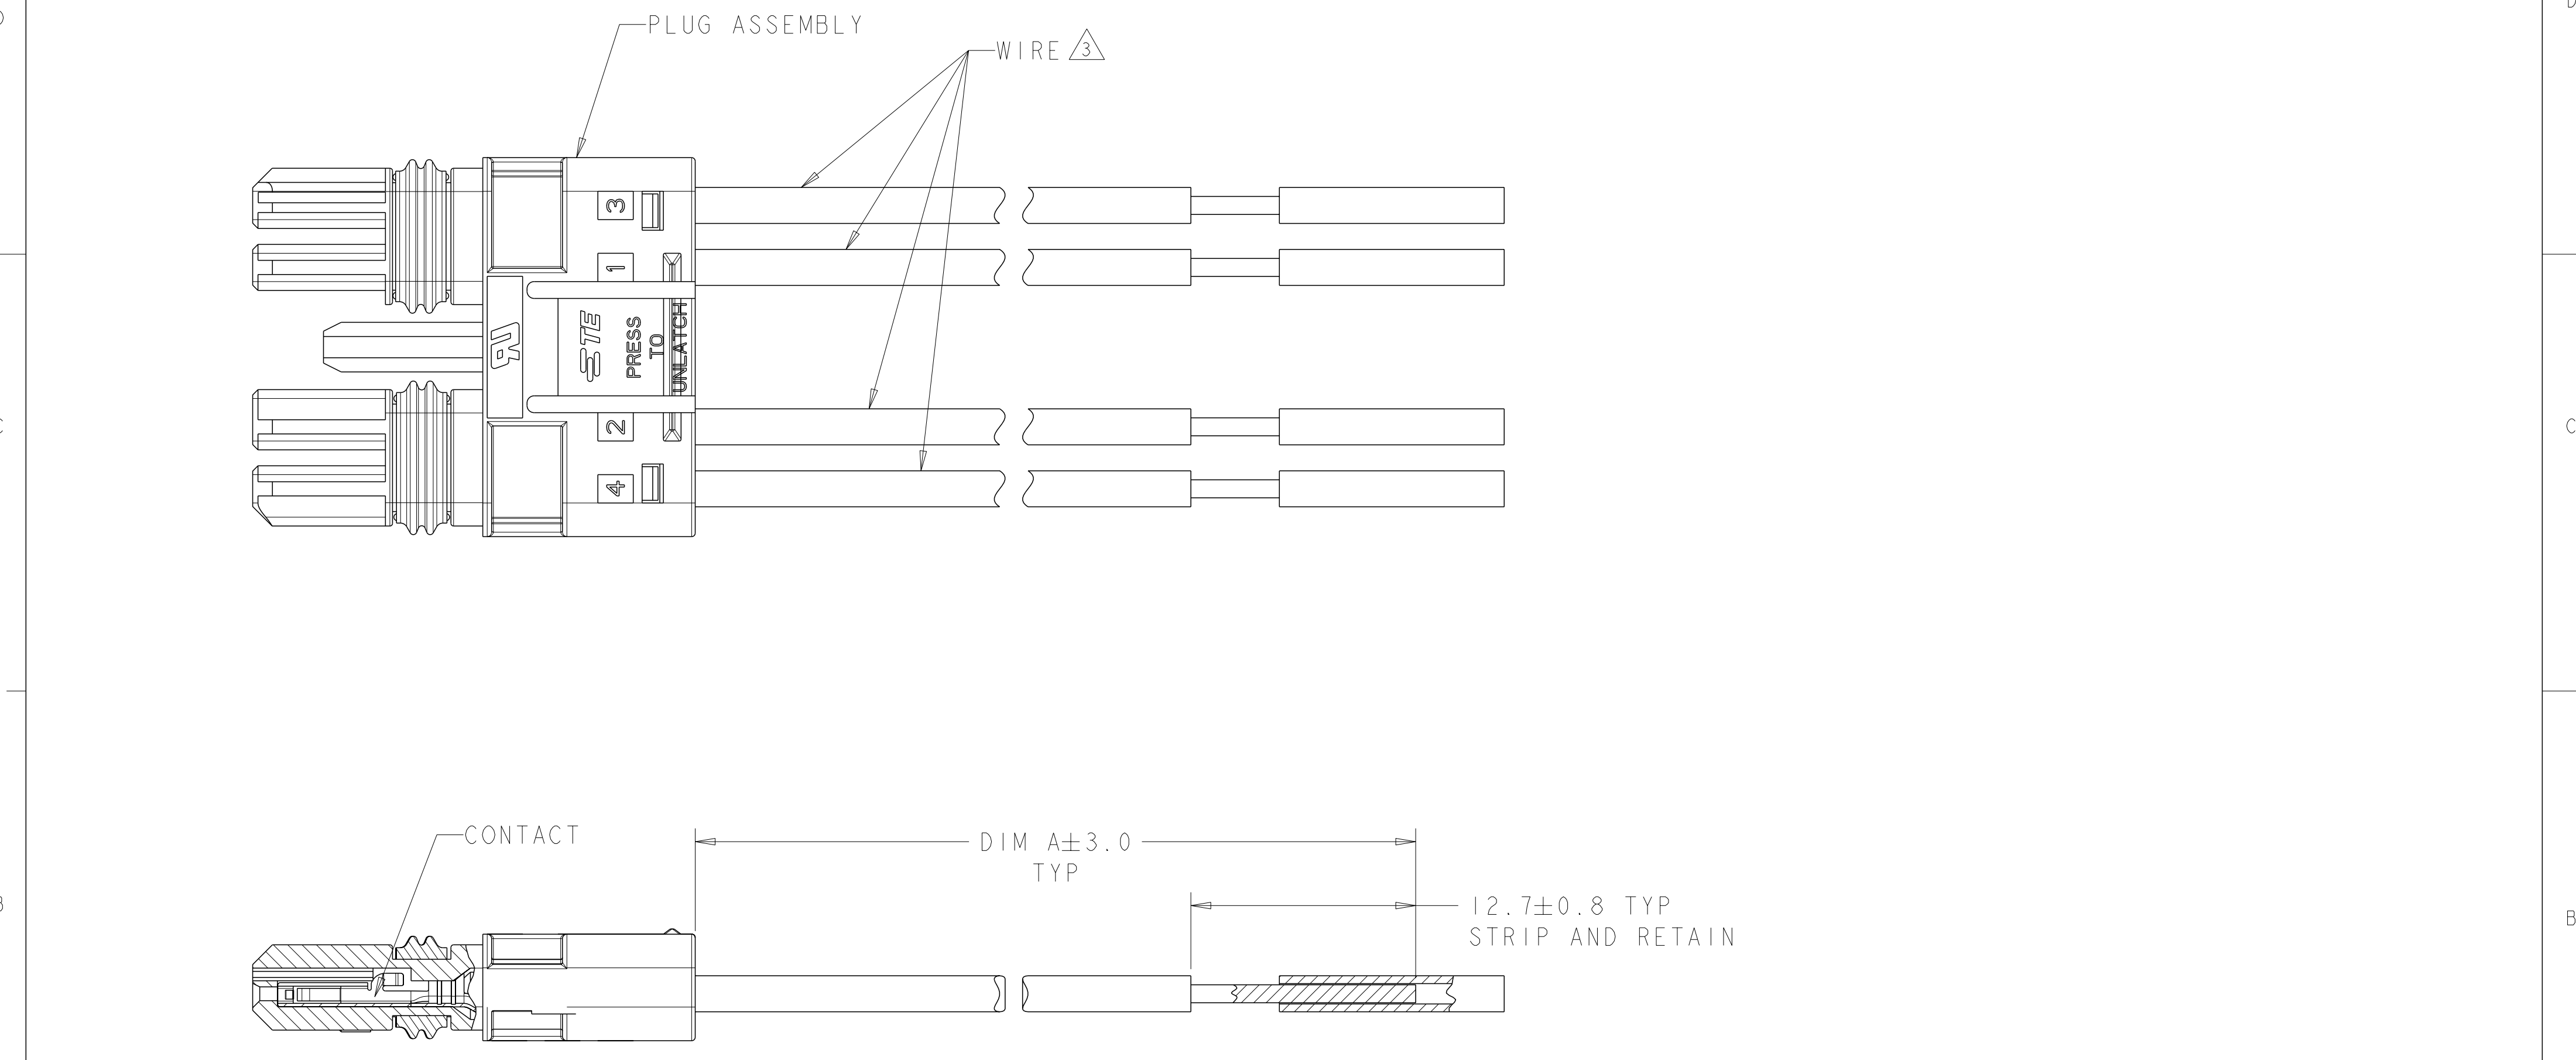

2106378-4 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	R BROWN	16APR2009
CHK	M MOSTOLLER	16APR2009
APVD	M MOSTOLLER	16APR2009
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		
CUSTOMER DRAWING		

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±-
	1 PLC ±0.2
	2 PLC ±-
	3 PLC ±-
	4 PLC ±-
	ANGLES ±-
	FINISH

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=2106378	-

TE Connectivity



NAME	CABLE ASSEMBLY, PLUG, SLIMSEAL SSL CONNECTOR		
SCALE	1:1	SHEET 3 OF 4	REV J

D

C

B

A

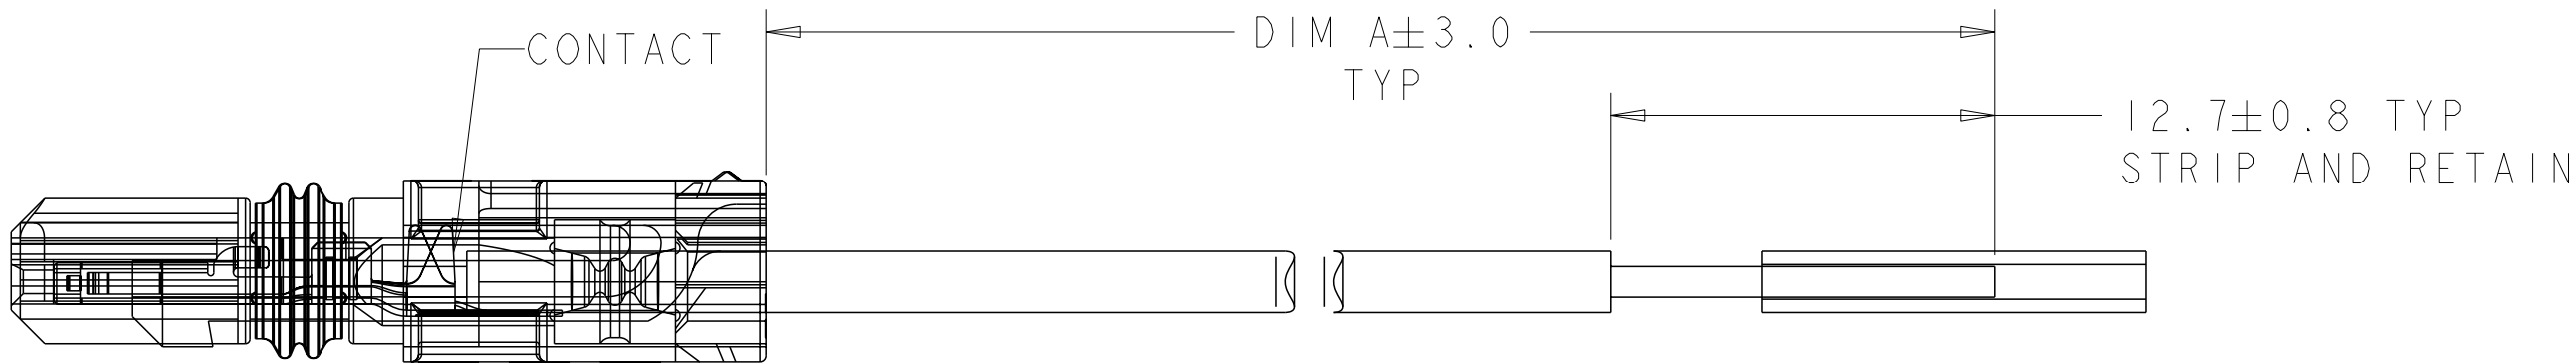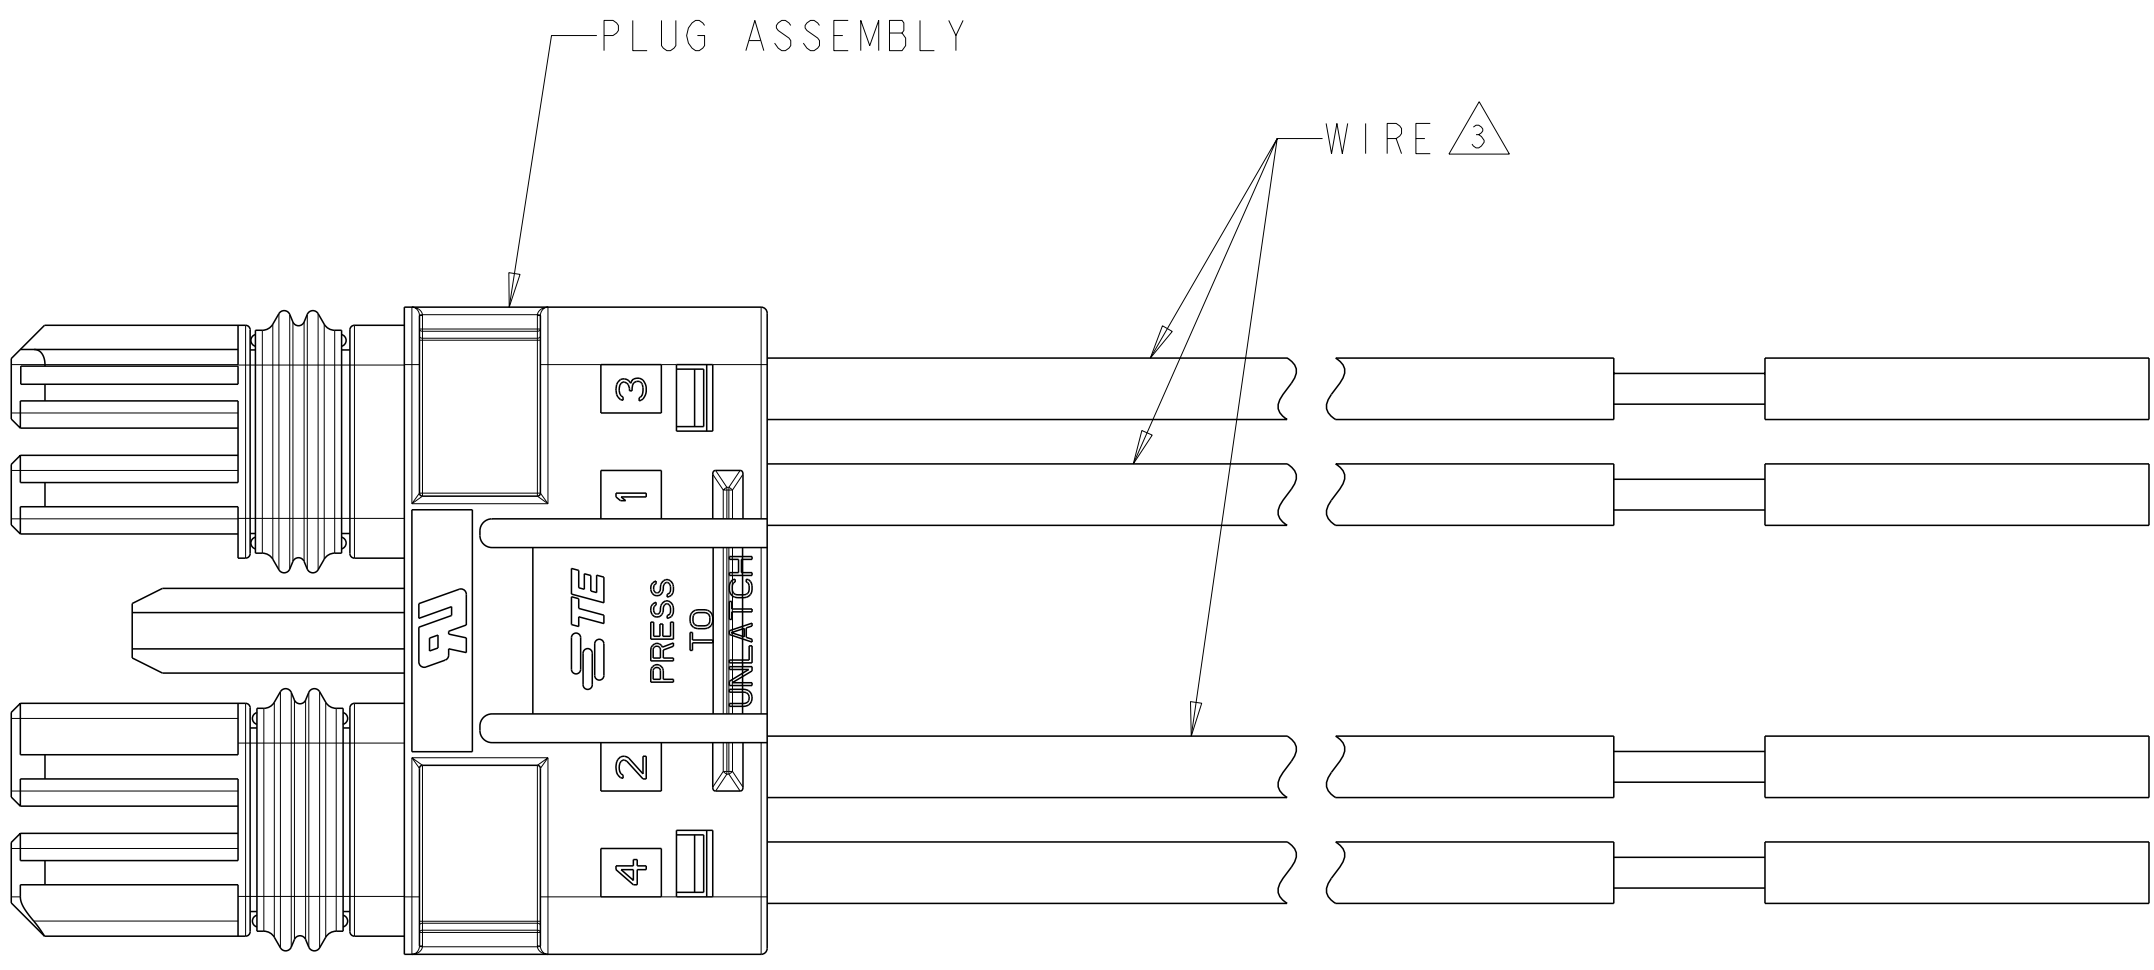

ALL WIRES ARE 20AWG
3-2106378-6 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±-
1 PLC	±0.2
2 PLC	±-
3 PLC	±-
4 PLC	±-
ANGLES	±-
FINISH	

MATERIAL

-

DWN

R BROWN

16APR2009

CHK

M MOSTOLLER

16APR2009

APVD

M MOSTOLLER

16APR2009

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

CABLE ASSEMBLY, PLUG, SLIMSEAL SSL CONNECTOR

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A200779

C=2106378

-

SCALE

1:1

SHEET

4

OF

4

REV

J