


|               |                   |
|---------------|-------------------|
| PAIR          | CONSIST OF:       |
| BTO-26732-D55 | (2) BTO-26740-D55 |
|               |                   |

| FREQUENCY | TEST TYPE   | RANGE OF DEVIATION<br>BETWEEN MICROPHONES | UNITS   |
|-----------|-------------|-------------------------------------------|---------|
| 1 kHz     | SENSITIVITY | 2.0 MAX.                                  | dB      |
| 200 Hz    | PHASE       | 1.5 MAX.                                  | DEGREES |
| 5000 Hz   | PHASE       | 5.0 MAX.                                  | DEGREES |
| 7000 Hz   | SENSITIVITY | 1.0 MAX.                                  | dB      |

3 >>> SHOWS MICROPHONE WITH GREATER RESPONSE PHASE VALUE AT 200 Hz.

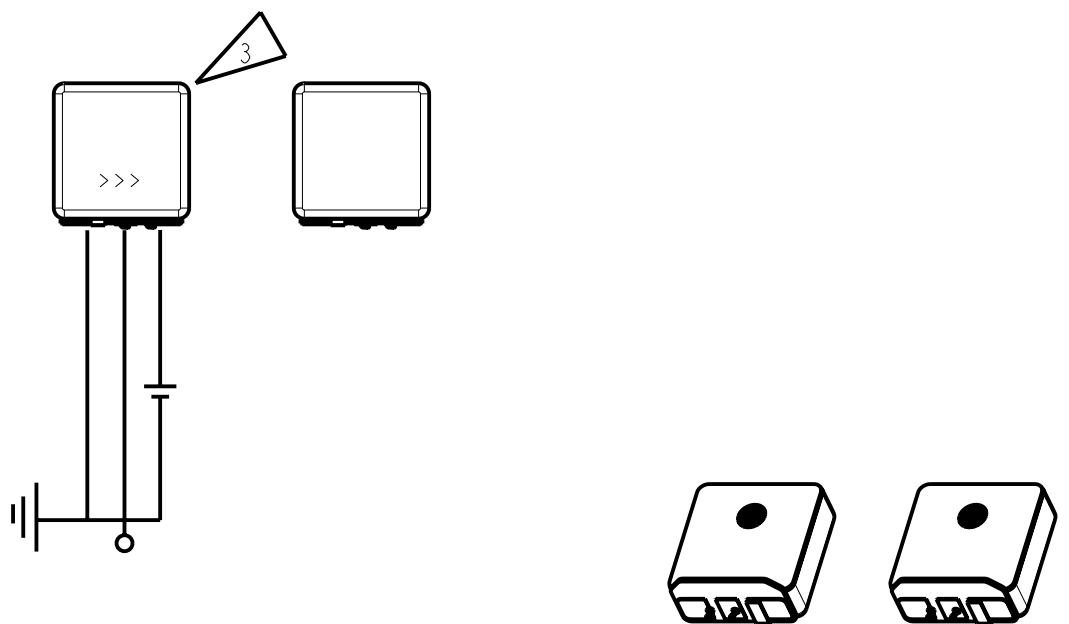

|                                                                                                                                                                                                              |            |                     |                          |                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Revision                                                                                                                                                                                                     | C.O. #     | Implementation Date | RELEASE LEVEL            | REVISION                                                                                                                    |
| C                                                                                                                                                                                                            | MI0101428  | 4-23-07             | Released                 | C                                                                                                                           |
| B                                                                                                                                                                                                            | MI0101231  | 9-14-06             |                          |                                                                                                                             |
| A                                                                                                                                                                                                            | MI0100999P | 1-17-06             |                          |                                                                                                                             |
| WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION |            |                     |                          | DR. BY _____ DATE _____<br>MMM 1-17-06<br>CK. BY _____ DATE _____<br>GJP 1-19-06<br>APP. BY _____ DATE _____<br>GJP 1-19-06 |
| TITLE: MICROPHONE PAIR<br>PERFORMANCE SPECIFICATION                                                                                                                                                          |            |                     | BT0-26732-D55<br>SHT 2.1 |                                                                                                                             |

**KNOWLES ELECTRONICS**  
ITASCA, ILLINOIS U.S.A.