


PAIR	CONSIST OF:
BTO-26732-D55	(2) BTO-26740-D55

FREQUENCY	TEST TYPE	RANGE OF DEVIATION BETWEEN MICROPHONES	UNITS
1 kHz	SENSITIVITY	2.0 MAX.	dB
200 Hz	PHASE	1.5 MAX.	DEGREES
5000 Hz	PHASE	5.0 MAX.	DEGREES
7000 Hz	SENSITIVITY	1.0 MAX.	dB

1. DC SUPPLY VOLTAGE 0.9 VOLTS.
2. SENSITIVITY AND PHASE VALUES INDICATED ARE VALID AT 50% RH.

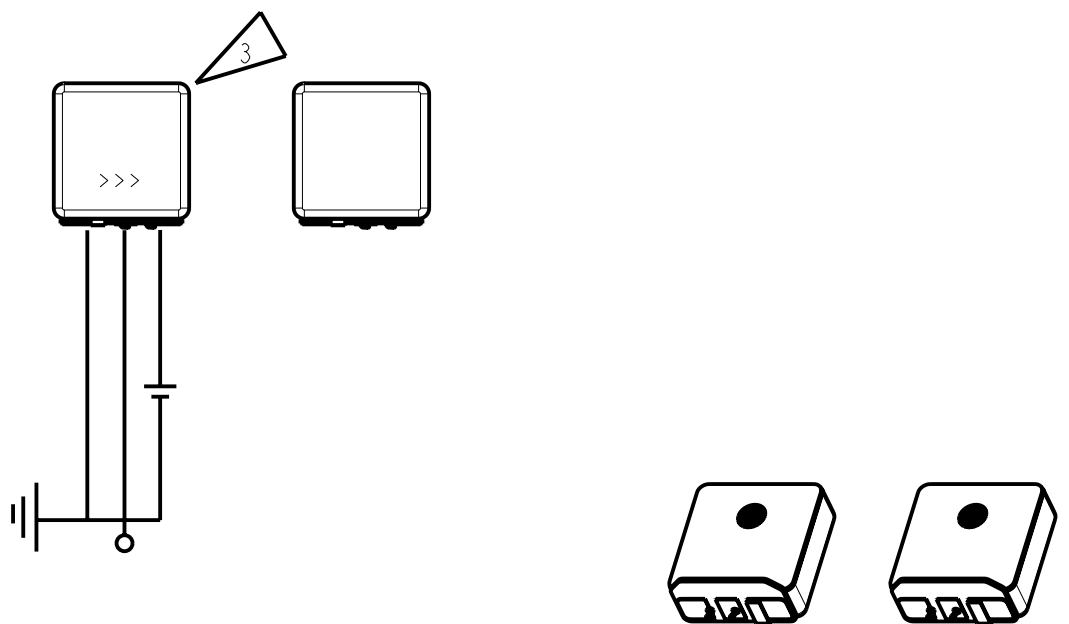

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	MI0101428	4-23-07	Released	C
B	MI0101231	9-14-06		
A	MI0100999P	1-17-06		
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY	DATE
			MMM	1-17-06
			CK. BY	DATE
			GJP	1-19-06
			APP. BY	DATE
			GJP	1-19-06

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.