

AP2012MGC

MEGA GREEN


### Features

- 2.0mmx1.25mm SMT LED,1.1mm THICKNESS.
- LOW POWER CONSUMPTION.
- WIDE VIEWING ANGLE.
- IDEAL FOR BACKLIGHT AND INDICATOR.
- VARIOUS COLORS AND LENS TYPES AVAILABLE.
- PACKAGE : 2000PCS / REEL.
- RoHS COMPLIANT.

### Description

The Mega Green source color devices are made with DH InGaAlP on GaAs substrate Light Emitting Diode.

### Package Dimensions

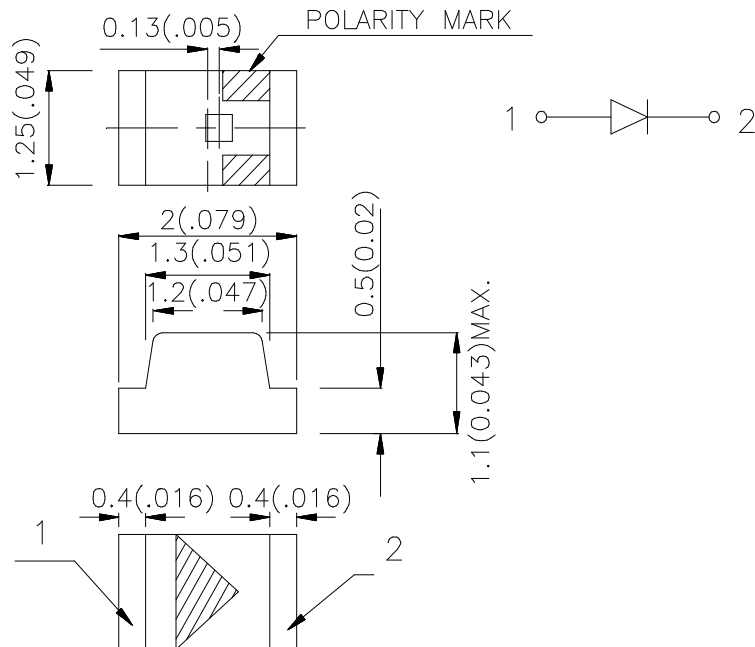

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.1(0.004)$  unless otherwise noted.
3. Specifications are subject to change without notice.

## Selection Guide

| Part No.  | Dice                 | Lens Type   | Iv (mcd)<br>@ 20mA |      | Viewing<br>Angle |
|-----------|----------------------|-------------|--------------------|------|------------------|
|           |                      |             | Min.               | Typ. | 2θ1/2            |
| AP2012MGC | MEGA GREEN (InGaAlP) | WATER CLEAR | 18                 | 70   | 120°             |

Note:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

## Electrical / Optical Characteristics at TA=25°C


| Symbol | Parameter                | Device     | Typ. | Max. | Units | Test Conditions |
|--------|--------------------------|------------|------|------|-------|-----------------|
| λpeak  | Peak Wavelength          | Mega Green | 574  |      | nm    | IF=20mA         |
| λD     | Dominant Wavelength      | Mega Green | 568  |      | nm    | IF=20mA         |
| Δλ1/2  | Spectral Line Half-width | Mega Green | 26   |      | nm    | IF=20mA         |
| C      | Capacitance              | Mega Green | 20   |      | pF    | VF=0V;f=1MHz    |
| VF     | Forward Voltage          | Mega Green | 2.1  | 2.5  | V     | IF=20mA         |
| IR     | Reverse Current          | Mega Green |      | 10   | uA    | VR = 5V         |

## Absolute Maximum Ratings at TA=25°C

| Parameter                     | Mega Green     | Units |
|-------------------------------|----------------|-------|
| Power dissipation             | 105            | mW    |
| DC Forward Current            | 30             | mA    |
| Peak Forward Current [1]      | 150            | mA    |
| Reverse Voltage               | 5              | V     |
| Operating/Storage Temperature | -40°C To +85°C |       |

Note:






1. 1/10 Duty Cycle, 0.1ms Pulse Width.

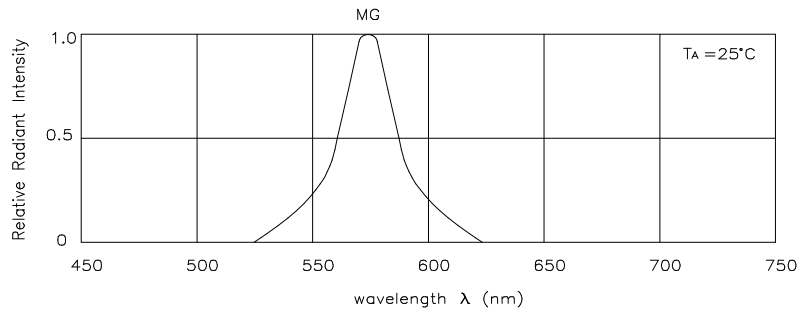

RELATIVE INTENSITY Vs. WAVELENGTH


## Mega Green

## AP2012MGC

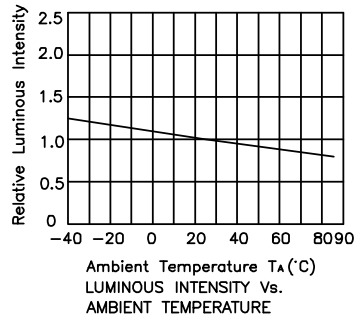

## AP2012MGC


Reflow Soldering Profile For Lead-free SMT Process.

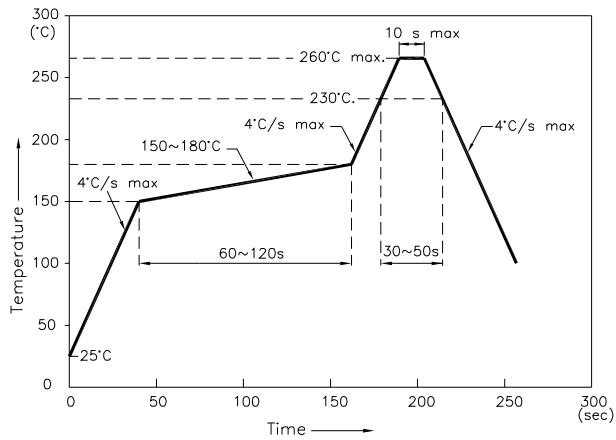


NOTES:

1. We recommend the reflow temperature 245°C(+/-5°C). The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.

### Recommended Soldering Pattern (Units : mm)

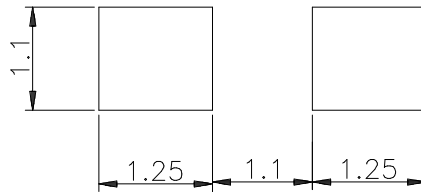

### Tape Specifications (Units : mm)

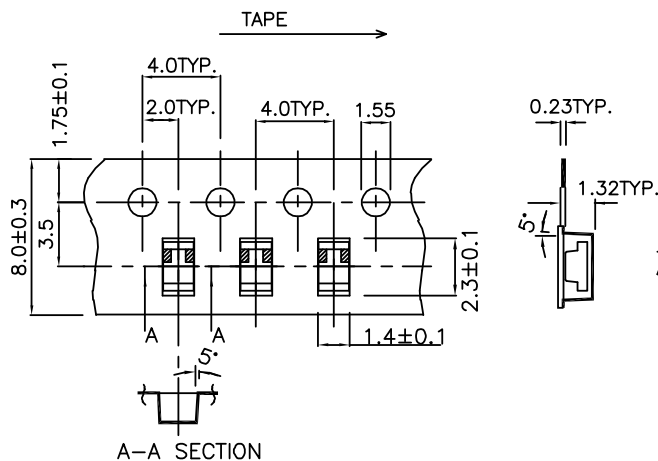

Remarks:

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity: +/-15%
3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.