

# Topstek Current Transducer TMA25A .. TMA600A


## TMA 25A~600A

### Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (12 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

### Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

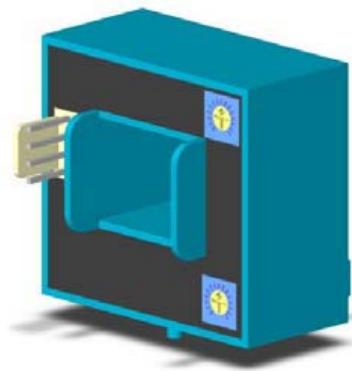


### Specifications

Parameter	Symbol	Unit	TMA25A	TMA50A	TMA100A	TMA150A	TMA200A	TMA300A	TMA400A	TMA600A
Nominal Input Current	I <sub>fn</sub>	A DC	±25	±50	±100	±150	±200	±300	±400	±600
Linear Range	I <sub>fs</sub>	A DC	±75	±150	±300	±450	±600	±900	±900	±900
Nominal Output Voltage	V <sub>hn</sub>	V				4.0 V ±1% at I <sub>f</sub> =I <sub>fn</sub> ( R <sub>L</sub> =10kΩ )				
Offset Voltage	V <sub>os</sub>	mV					Within ±40 mV @ I <sub>f</sub> =0, T <sub>a</sub> =25°C			
Output Resistance	R <sub>OUT</sub>	Ω					<100Ω			
Hysteresis Error	V <sub>oh</sub>	mV					Within ±20 mV @ I <sub>f</sub> =I <sub>fn</sub> →0			
Supply Voltage	V <sub>CC</sub> /V <sub>EE</sub>	V					±15V ±5%			
Linearity	ρ	%					Within ±1% of I <sub>fn</sub>			
Consumption Current	I <sub>cc</sub>	mA					±15 mA max			
Response Time (90%V <sub>hn</sub> )	T <sub>r</sub>	μsec				10 μsec	@ d I <sub>f</sub> / dt = I <sub>fn</sub> / μsec			
Frequency bandwidth (-3dB)	f <sub>BW</sub>	Hz					DC to 50kHz			
Thermal Drift of Output	-	%/°C					Within ±0.1 %/°C @ I <sub>fn</sub>			
Thermal Drift of Zero Current Offset	-	mV/°C					Within ±1.5 mV/°C @ I <sub>fn</sub>			
Dielectric Strength	-	V					AC2.5KV X 60 sec			
Isolation Resistance @ 1000 VDC	R <sub>IS</sub>	MΩ					>1000 MΩ			
Operating Temperature	T <sub>a</sub>	°C					-15°C to 80°C			
Storage Temperature	T <sub>s</sub>	°C					-20°C to 85°C			
Mass	W	g					65 g			

# Topstek Current Transducer TMA25A .. TMA600A

## Appearance, dimensions and pin identification

All dimensions in mm  $\pm 0.1$ , holes  $-0, +0.2$  except otherwise noted.

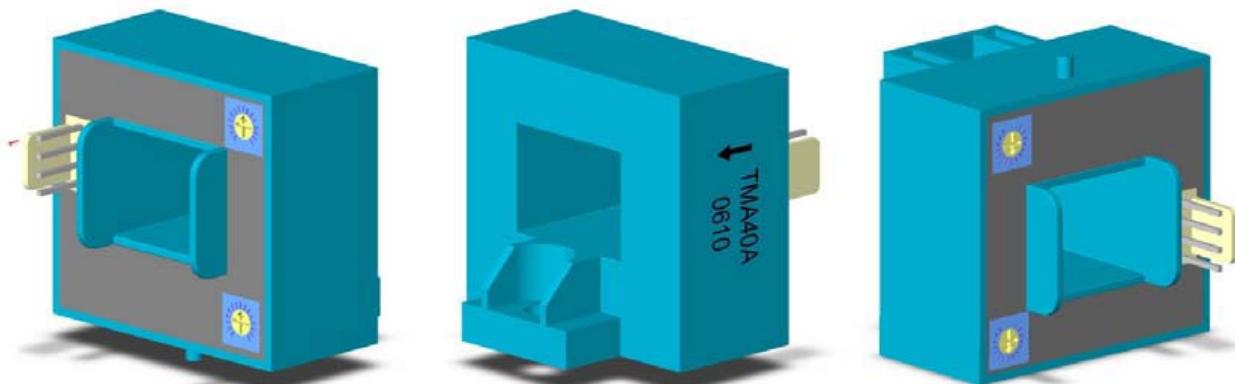

Pin Assignment	
1	+15V
2	-15V
3	V <sub>OUT</sub>
4	0V

