

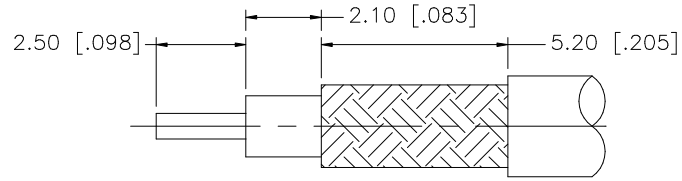
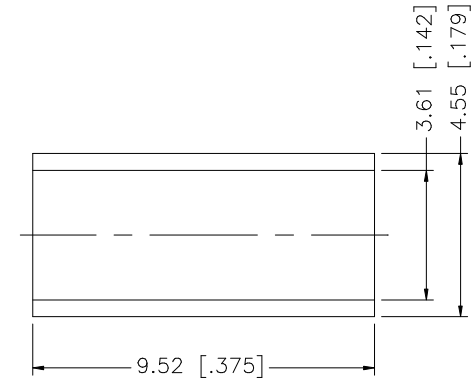


REV.	DATE	DESCRIPTION
A	11/31/01	MODIFY CONTACT PIN
B	10/31/05	UPDATE DRAWING FORMAT, MODIFY CRIMP NOTES
C	02/15/07	REVISE CONTACT PIN AND FERRULE DIMENSIONS

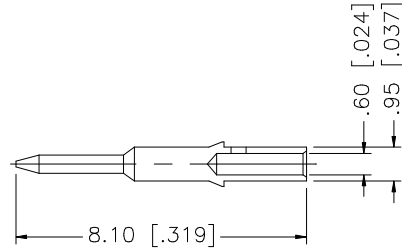

RECOMMENDED CABLE
STRIPPING DIMENSIONS

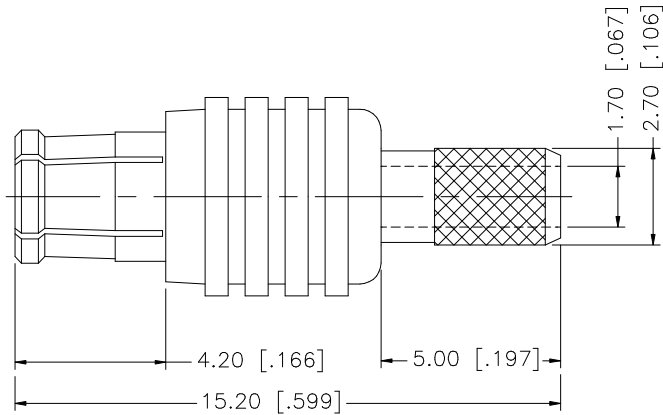

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .151"
 2. CRIMPED CONTACT PIN SQ. CRIMP SIZE 0.7(mm)

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
7						DRAWN	G.R.S.						02/15/07		
6						CHECKED									
5	FERRULE	COPPER	GOLD	1			ISSUED		PART DESCRIPTION						
4	CONTACT PIN	BRASS	GOLD	1			SHEET	1 OF 1	MCX STRAIGHT CRIMP PLUG – GOLD (FOR RG-3179/U DOUBLE BRAID)						
3	INSULATOR	TEFLON	NATURAL	2					PART NO.						
2	BODY	BER. COPPER	GOLD	1					252121–75						
1	HOUSING	BRASS	GOLD	1					DWG. NO.	252121–75.DWG	REV.	C	SIZE	A	SCALE
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE	C:/252/252121–75.DWG							