
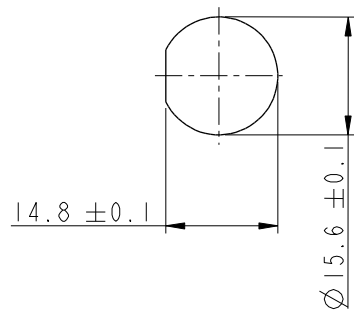
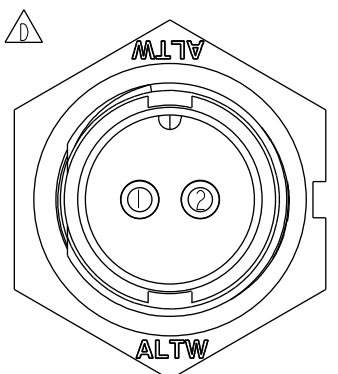
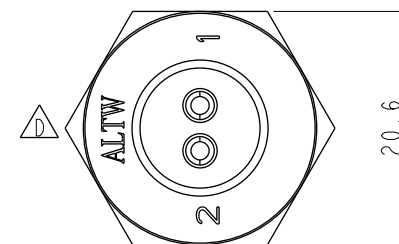
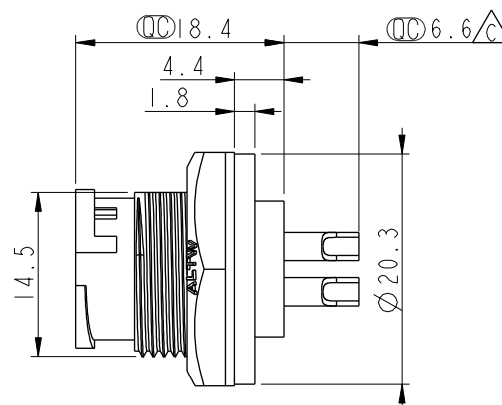

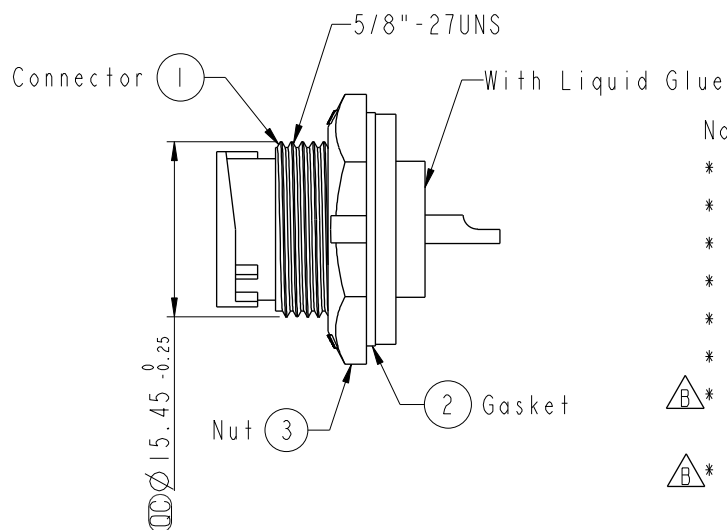


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-010125	2010/01/19	Li Xiu Zhi	Change 6.5 to 6.6
D	LEN1540238	2014/12/27	Jinhai	Change Logo
E	CI90274	2019/02/19	Ruru	Modify Note



Recommended Panel Cut-Out

Pin Assignments
Front View

Note:

- * Important Dimension To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

 * Use with waterproof cap or dust cap
Panel Thickness Max: 3.0mm * Use without waterproof cap or dust cap
Panel Thickness Max: 4.5mm

- * Gasket and Nut are packed separately in PE bags.

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE Standard Panel Lock 2Pin M Conn. M Pin			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. E	WC-REV. A.4	Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO. BB-02PMMS-LC7001	DRAWN BY Ruru	DATE 2019-02-19
DWG NO. BB-02PMMS-LC7001	CHECKED BY Rita	DATE 2019-02-19
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-02-19