


## Coaxial Cable Connector 11\_SMA-50-3-42/-33\_N

### Description

Straight cable plug

Interface standards  
SUHNER-SMA-26.5GHz

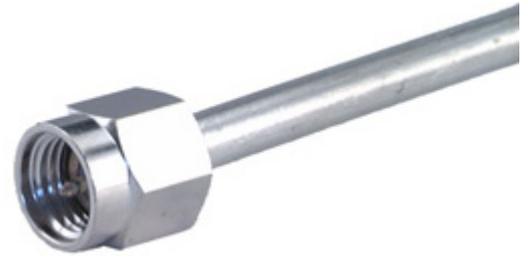

### Technical Data

#### Electrical Data

Impedance	50 $\Omega$
Interface frequency max.	26.5 GHz

#### Mechanical Data

Centre contact	soldered
Outer contact	soldered
Weight	0.0033 kg

#### Environmental Data

Operating temperature	-65 °C to 165 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

#### Material Data

Piece Parts	Material	Surface Plating
Centre contact		
Outer contact	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Coupling nut	Brass	SUCOPLATE (R) Plating
Gasket	VMQ (Silicone rubber)	

### Related Documents

Outline drawing	DOU-00006525
Catalogue drawing	DOU-00006518
Assembly instruction	DOC-0000179294

### Ordering Information

Bulk 100 pcs package	11_SMA-50-3-42/-33_NH
Single package	11_SMA-50-3-42/-33_NE

### Additional Information

Suitable cables	EZ_141_TP_M17
-----------------	---------------

### Remarks

El. Optimized for cable RG 58 C/U

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HUBER+SUHNER:](#)

[11\\_SMA-50-3-42/-33\\_NH](#)