


**PLUG MML H2.0 - BULKHEAD JACK SMA**

**R302.205.003**

**CABLE 1.13/50 S-BR, LENGTH 10CM**

Series : MML

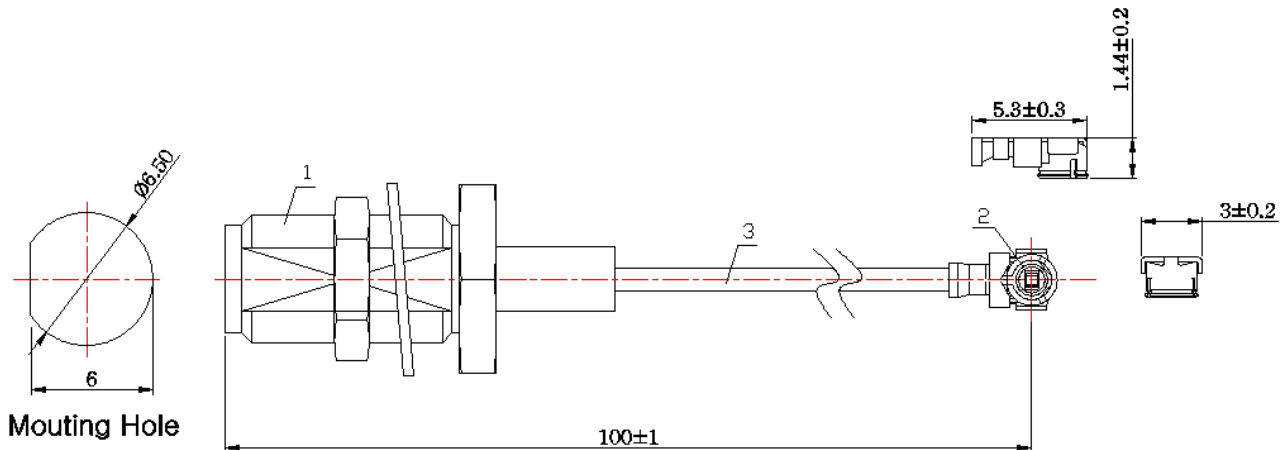

- \* 1 \* Connector A : **SMA JACK(GOLD PLATED) BULKHEAD**
- \* 2 \* Connector B : **MML\*PLUG(GOLD PLATED) H2.0**
- \* 3 \* Cable : **1.13/50 S BLACK**

**ELECTRICAL CHARACTERISTICS**

**SPECIFICATION**

Impedance	<b>50 Ω</b>
Frequency	<b>0-3 GHz</b>
Operating temperature	<b>-40/+90 ° C</b>
VSWR	<b>1.5 + 0,000 x F(GHz) Maxi</b>
Insertion loss	<b>0.12 √F(GHz) dB Maxi</b>
Voltage rating	<b>200 Veff Maxi</b>
Dielectric withstanding voltage	<b>200 Veff mini</b>
Insulation resistance	<b>500 MΩ mini</b>

Weight	<b>3,6000 g</b>
Cable retention	<b>12.74 N mini</b>
Mating life	<b>30 cycles</b>
Others :	

