


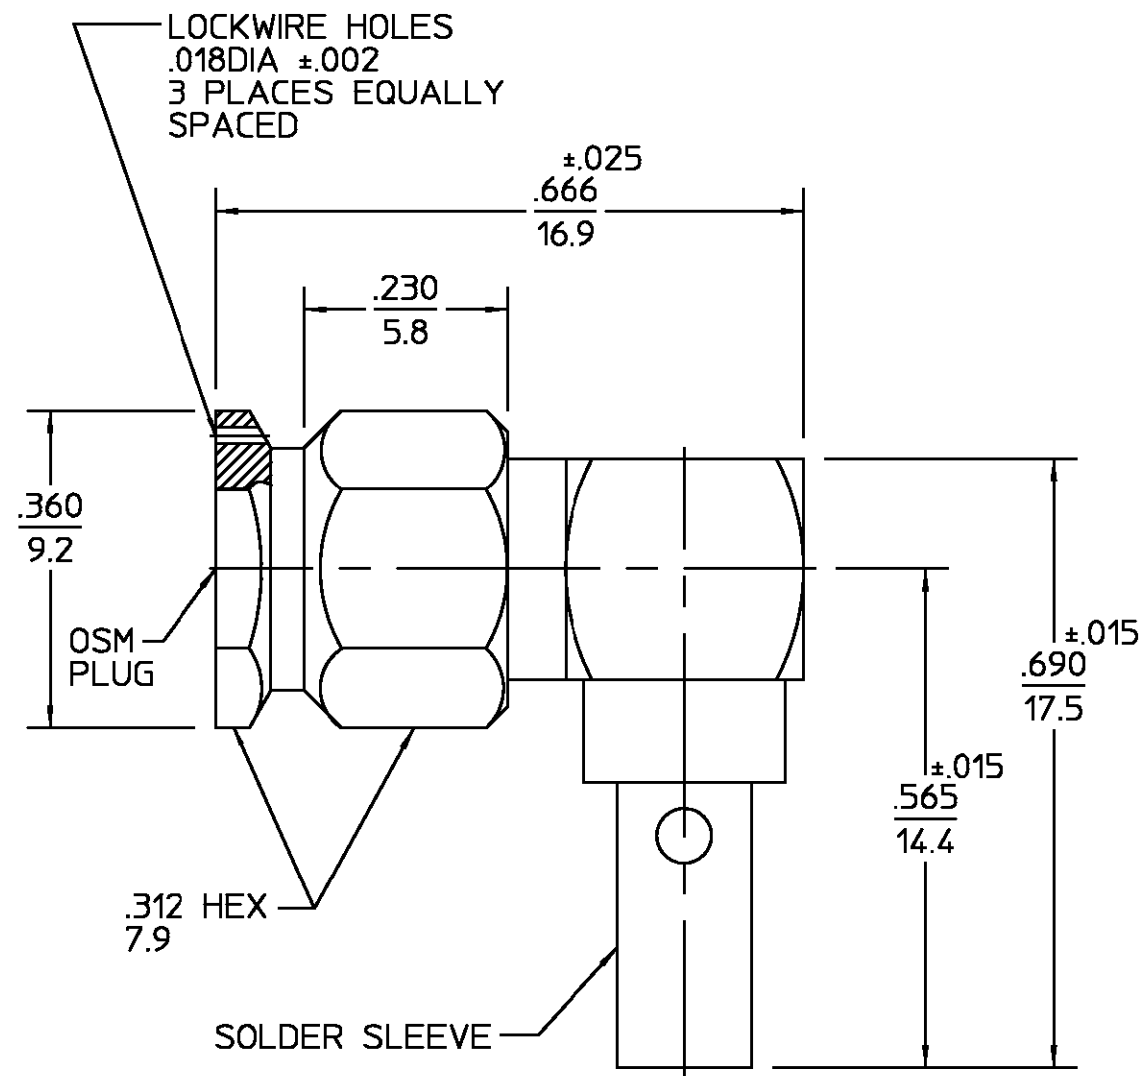

.XXX = in
XX.X = mm

NOTES:

1. DESIGNED FOR USE WITH RG 174, 316 CABLES
2. CAPTURED CENTER CONTACT

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01 ₂	REVISED	DAC 6/15/99	DCm 6/16/99

HOUSING CAP	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	GOLD PLATE PER MIL-G-45204
COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BRASS PER ASTM-B-16 HALF HARD	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204
COMPONENT	MATERIAL	FINISH

CABLE ENTRY DIAMETER MINIMUM		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°	DRAWN BY TMCW	DATE 10-18-82	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599			
			CHECKED BY R.G.	10-20-82				
SLEEVE	.126		APPROD BY RMF	10/22/82				AMP
HOUSING	.067	These drawings and specifications are the property of AMP Interconnect Division and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE 408-04931 (20-519) NO. AP. _____		TITLE OSM RIGHT ANGLE CABLE PLUG SOLDER ATTACHMENT M39012/56-3007 CAT A			
CONTACT	.041 SLOT							
					SIZE B	CODE IDENT NO. 26805	2037-8007-92	REV 01 ₂
					SCALE 5:1			SHEET 1 OF 1