

UPZ

High Voltage, Miniature-sized




Smaller

UPZ

Smaller

UPH

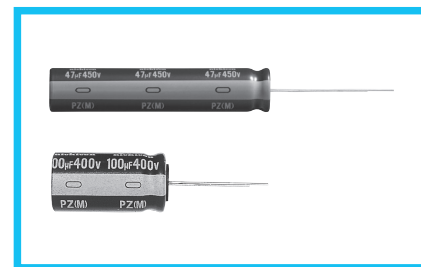


- High ripple current.
- Load life of 2000 hours at 105°C.
- Suited for ballast applications.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).


Specifications

Item	Performance Characteristics						
Category Temperature Range	-25 to +105°C						
Rated Voltage Range	200 to 450V						
Rated Capacitance Range	18 to 470μF						
Capacitance Tolerance	± 20% at 120Hz, 20°C						
Leakage Current	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.04CV+100 (μA).						
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C						
	Rated voltage (V)	200	250	400	420	450	
	tan δ (MAX.)	0.12	0.15	0.15	0.20	0.20	
Stability at Low Temperature	Measurement frequency : 120Hz						
	Rated voltage (V)	200	250	400	420	450	
	Impedance ratio (MAX.)	Z-25°C / Z+20°C	3	3	8	8	
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 2000 hours at 105°C, the peak voltage shall not exceed the rated voltage.					Capacitance change	Within ±20% of the initial capacitance value
						tan δ	200% or less than the initial specified value
						Leakage current	Less than or equal to the initial specified value
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.						
Marking	Printed with white color letter on dark brown sleeve.						


Radial Lead Type

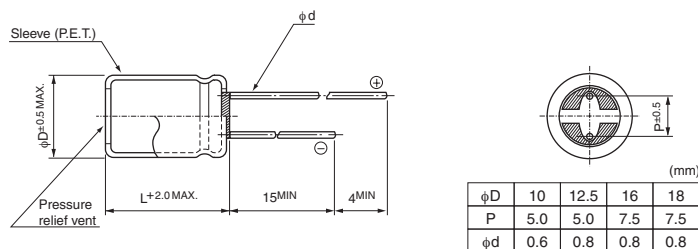

Type numbering system (Example : 200V 220µF)

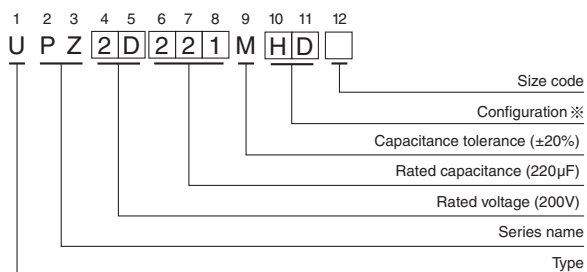

Pencil - shaped Type

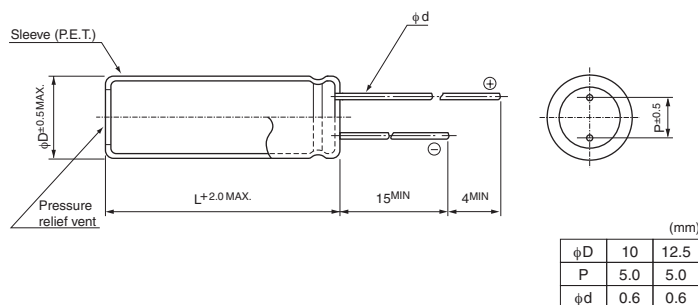

※ Configuration

Size code	Blank, 6	9
ϕD	Pb-free leadwire	Pb-free PET sleeve
10	PD	ND
12.5 to 18	HD	NY

• Please refer to page 20 about the end seal configuration.

Please refer to page 20, 21, 22 about the formed or taped product spec.
Please refer to page 4 for the minimum order quantity.

● Dimension table in next page.

UPZ

■ Dimensions

V		200		400		420		450	
Cap.(μF)	Code	2D		2G		W6		2W	
18	180							10 × 31.5	180
22	220					10 × 31.5	200		
27	270			10 × 31.5	240				
33	330							12.5 × 31.5	280
39	390					12.5 × 31.5	310	12.5 × 35.5	320
47	470			12.5 × 31.5	370	12.5 × 35.5	360	12.5 × 40	380
56	560			12.5 × 35.5	420	12.5 × 40	430	16 × 31.5	440
68	680			12.5 × 40	480	16 × 31.5	510	16 × 35.5	490
82	820	10 × 31.5	400			16 × 35.5	570	16 × 40 ▲ 18 × 31.5	550 550
100	101			16 × 31.5	580	16 × 40 ▲ 18 × 31.5	610 610	18 × 35.5	650
120	121			16 × 35.5 ▲ 18 × 31.5	670 670	18 × 35.5	660	18 × 40	740
150	151	12.5 × 31.5	620	16 × 40 ▲ 18 × 35.5	770 770	18 × 40	710		
180	181	12.5 × 35.5	700	18 × 40	880				
220	221	12.5 × 40	800						
270	271	16 × 31.5	870						
330	331	16 × 35.5 ▲ 18 × 31.5	1010 1010						
390	391	16 × 40 ▲ 18 × 35.5	1130 1120						
470	471	18 × 40	1270					Case size φD × L (mm)	Rated ripple

Rated ripple current (mA_{rms}) at 105°C 120Hz

▲ : In this case, [6] will be put at 12th digit of type numbering system.

Pencil-shaped Type

V		200		250		400		450	
Cap.(μF)	Code	2D		2E		2G		2W	
33	330							● 10 × 40	360
47	470					● 10 × 40	435	● 10 × 50	450
56	560					● 10 × 50	520		
82	820			● 10 × 40	610			● 12.5 × 50	730
100	101					● 12.5 × 50	770		
120	121	● 10 × 40	680	● 10 × 50	740				
150	151	● 10 × 50	830						
220	221			● 12.5 × 50	1140			Case size φD × L (mm)	Rated ripple
270	271	● 12.5 × 50	1265						

Rated ripple current (mA_{rms}) at 105°C 120Hz

● : In this case, [9] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

V	60Hz	120Hz	500Hz	1kHz	10kHz or more
200・250	0.80	1.00	1.20	1.30	1.40
400 to 450	0.80	1.00	1.25	1.40	1.50