

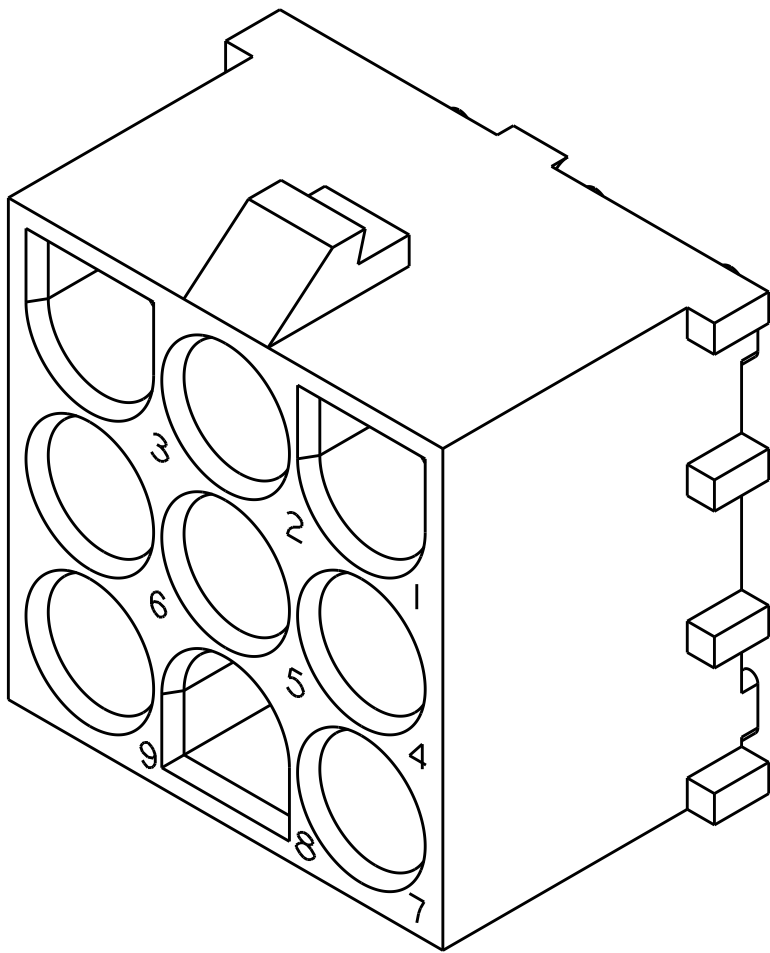
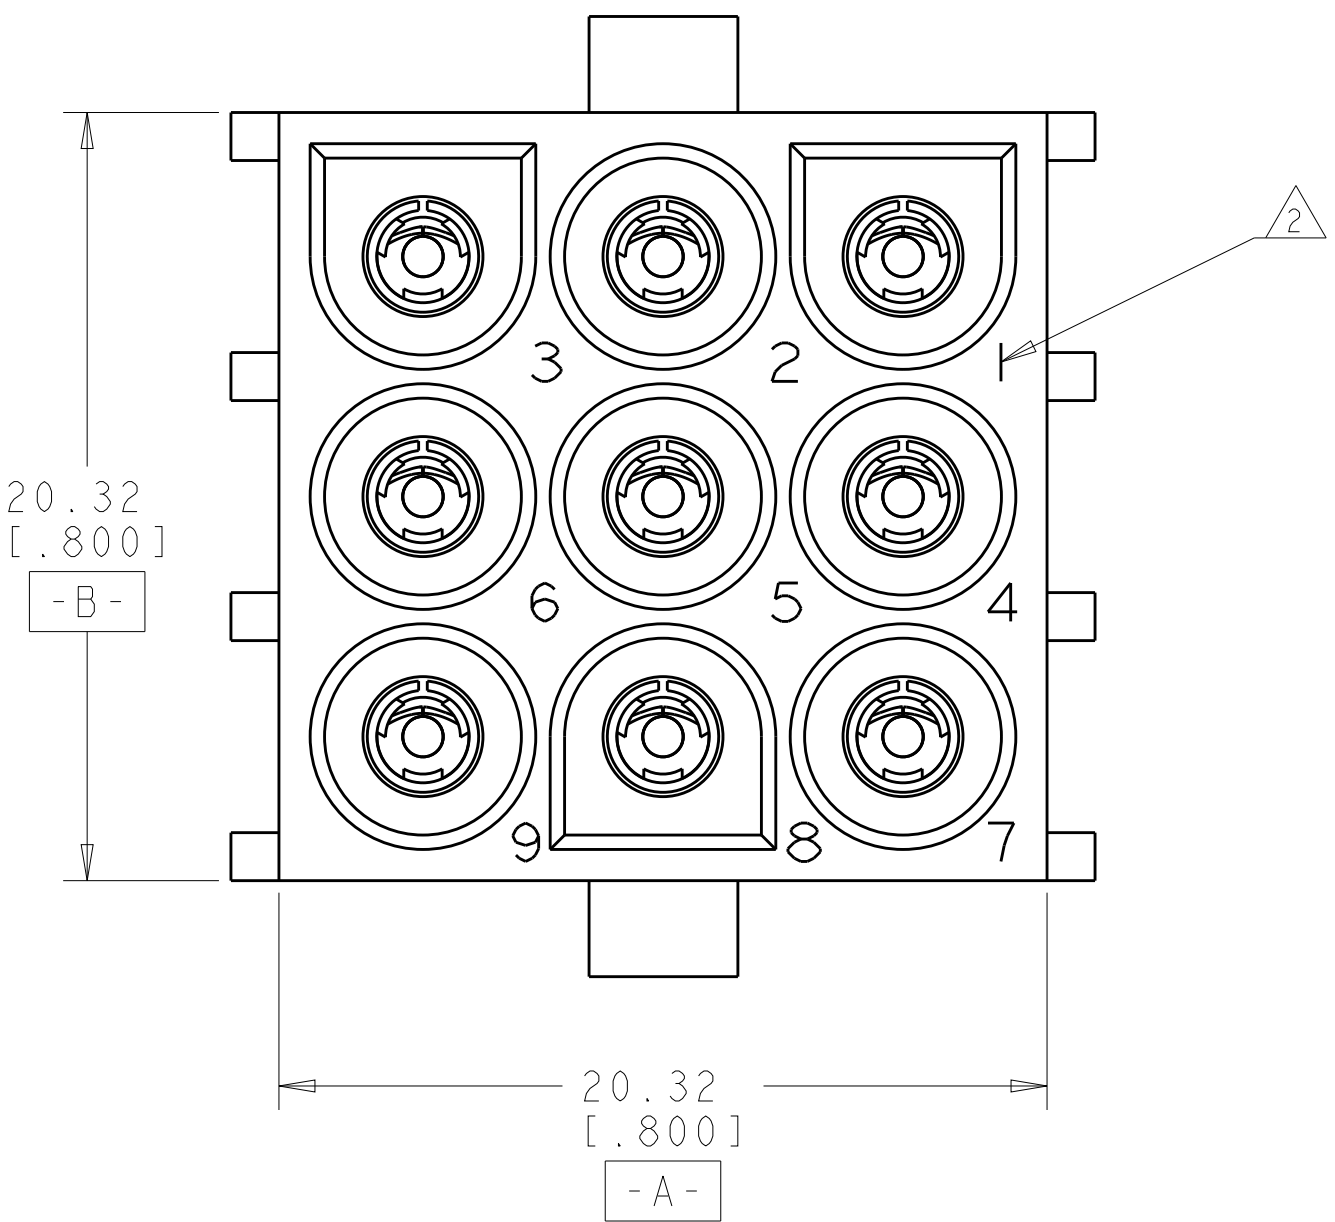
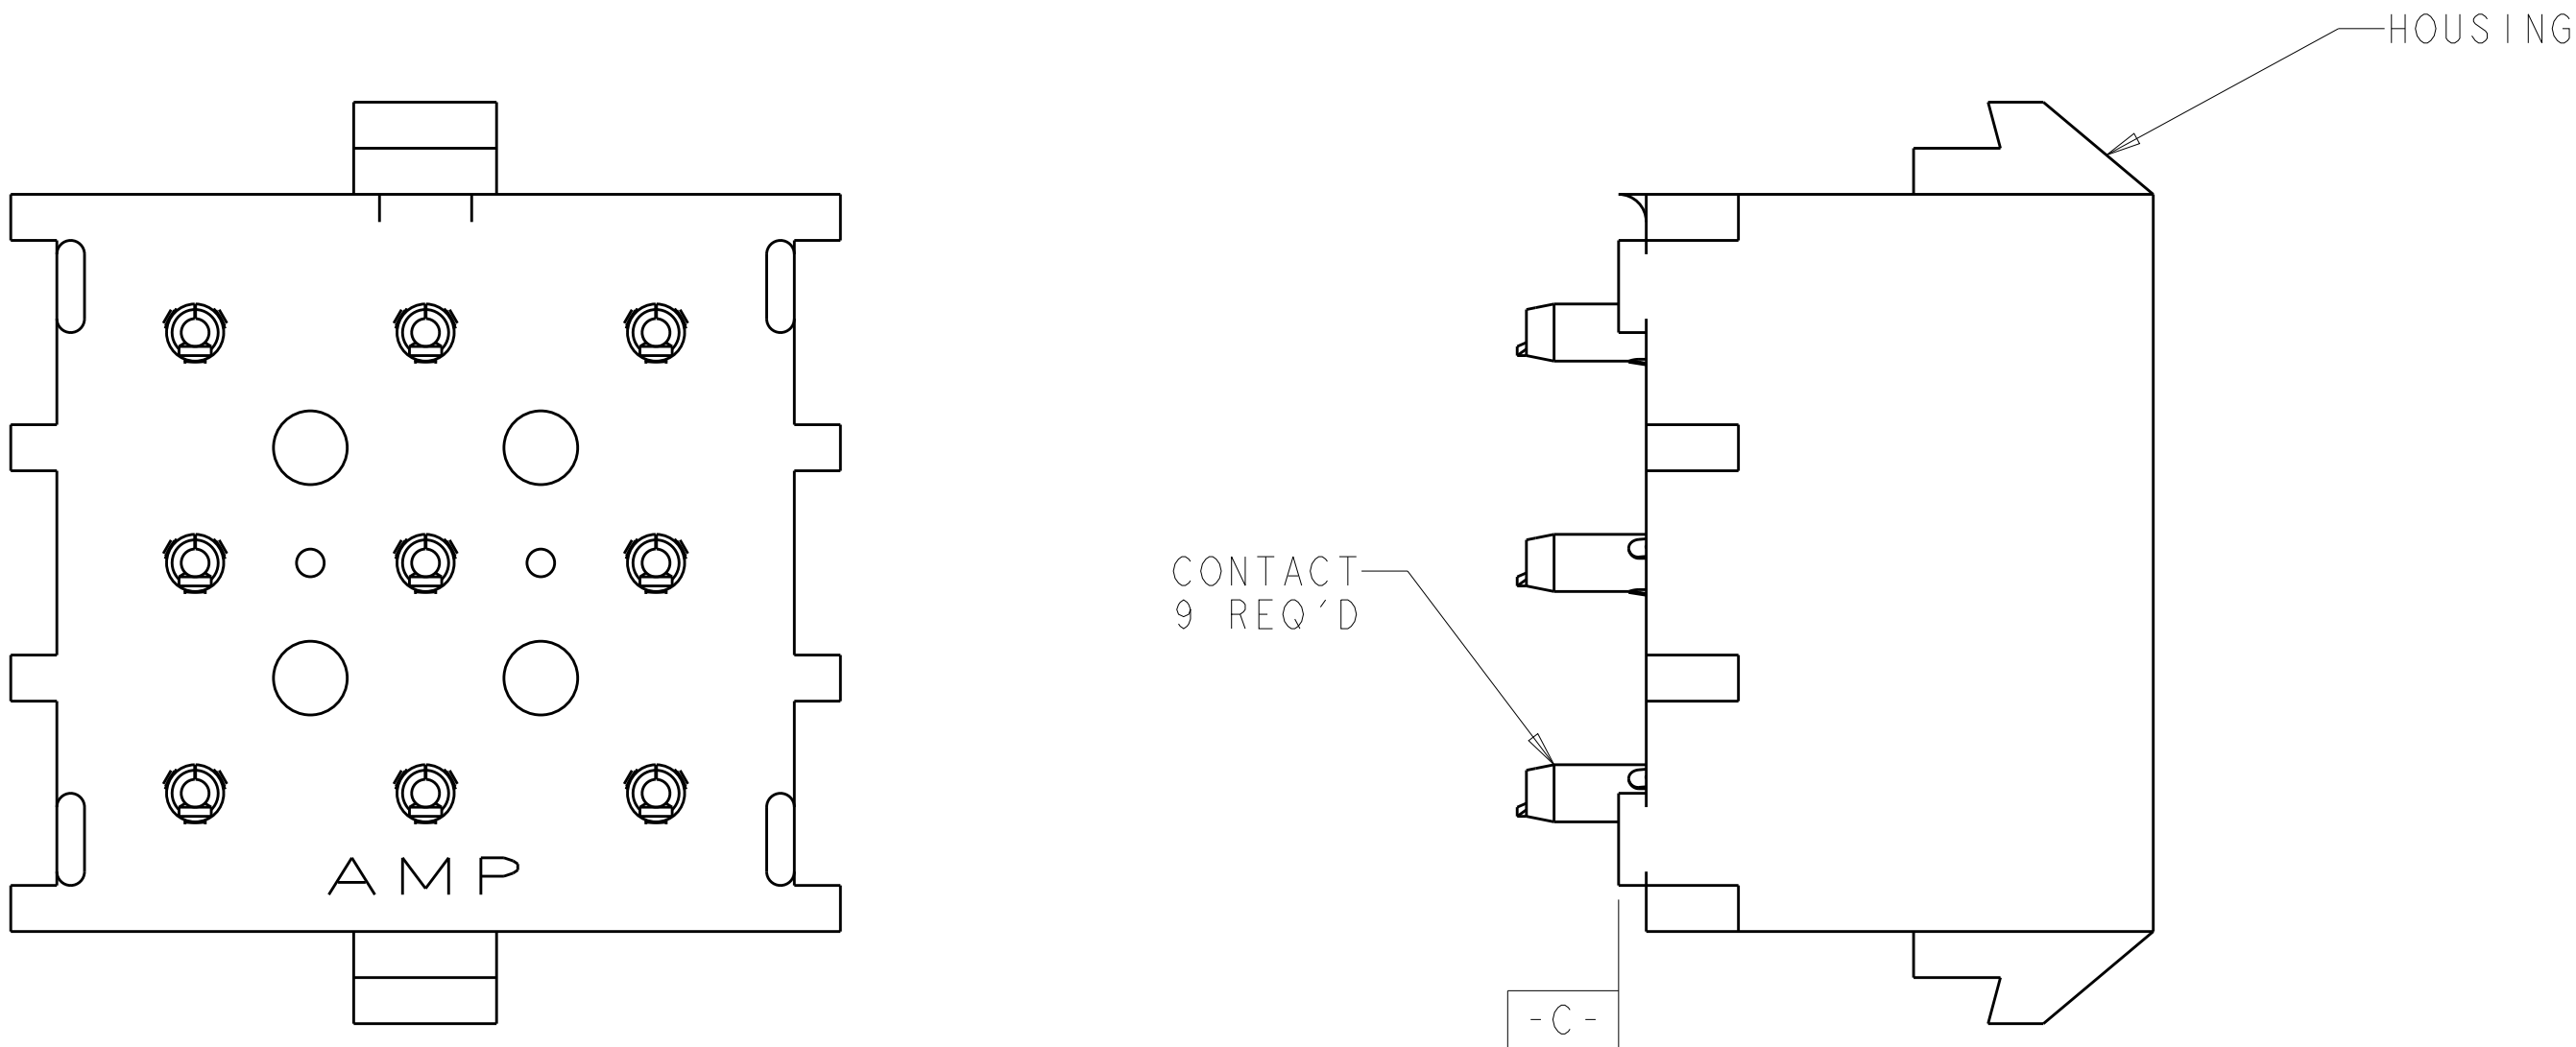
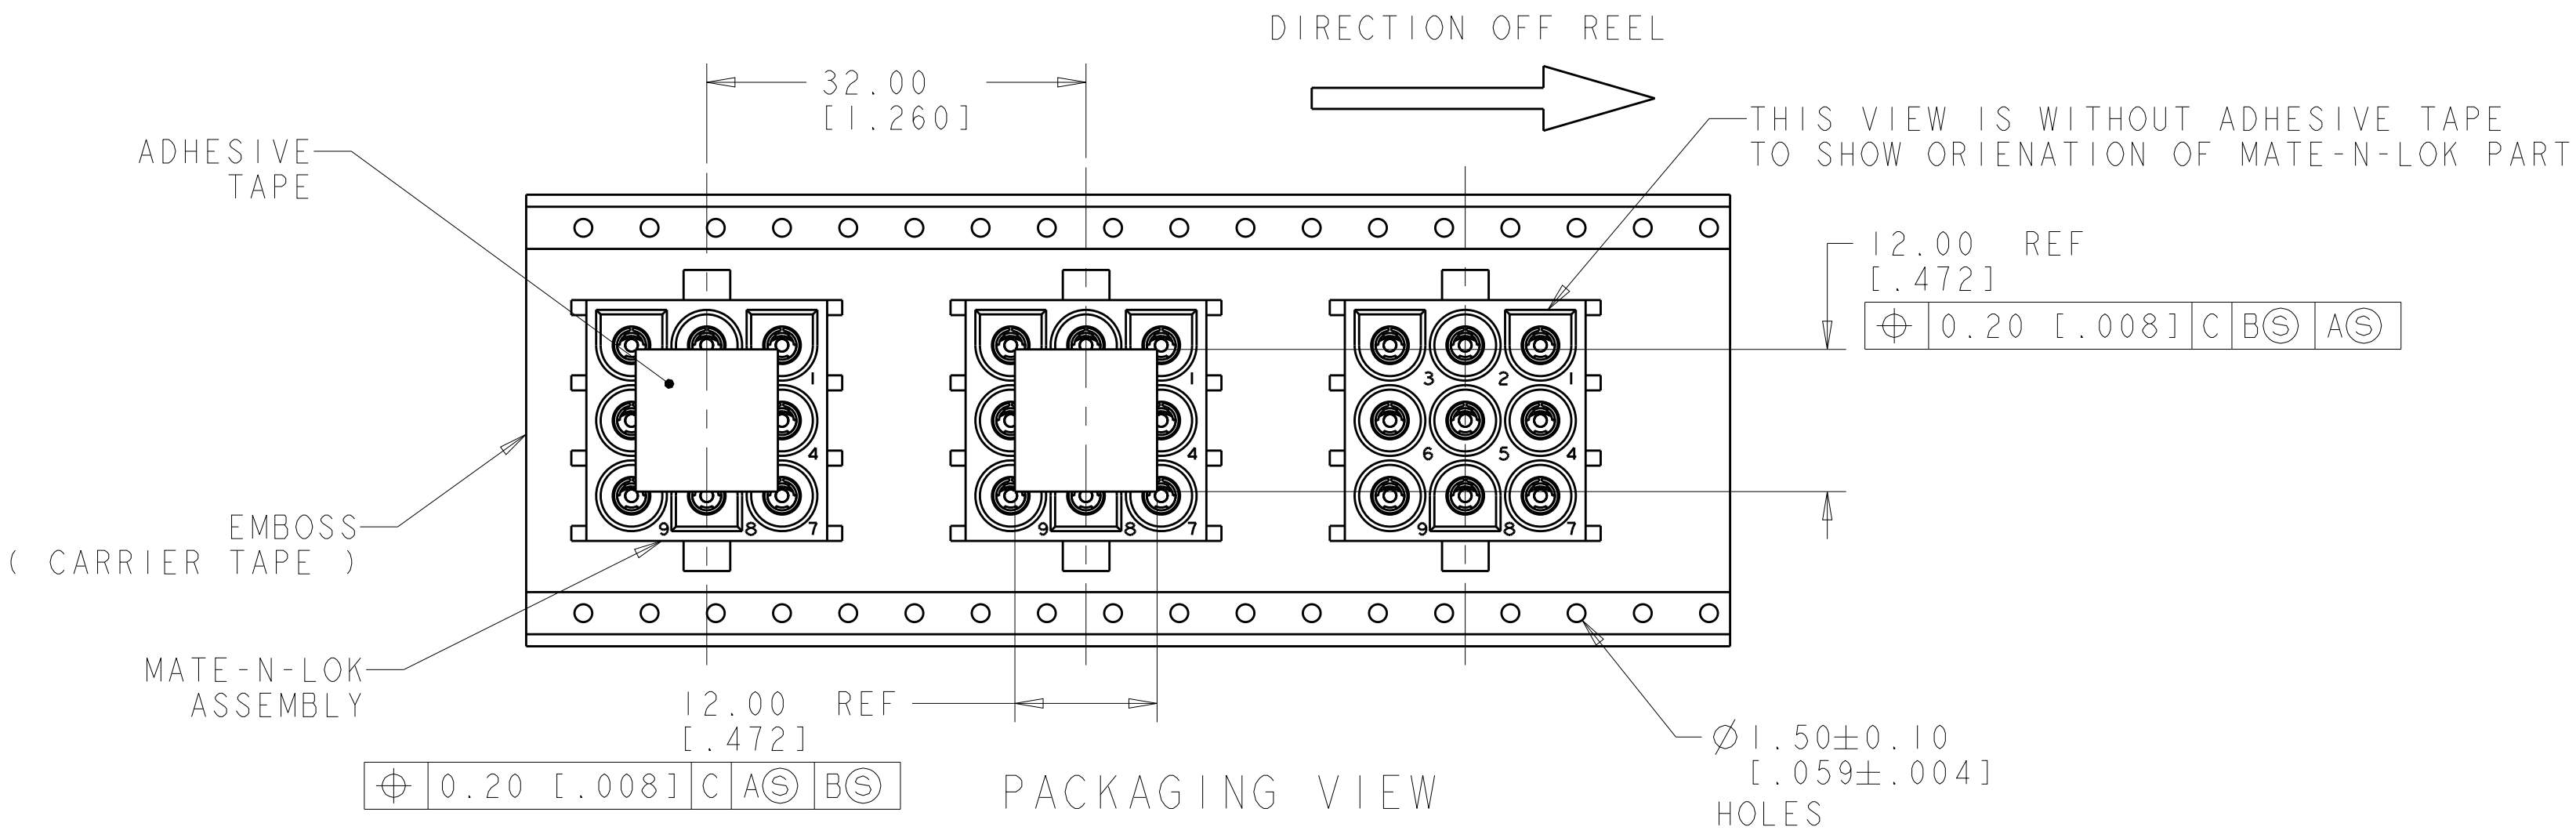


LOC		DIST		REVISIONS					
CM	00	P	LTR	DESCRIPTION			DATE	DWN	APVD
			A2	REVISED PER ECO-15-011676			20AUG15	JR	EW

1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-2.
2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
3. TAPE & REEL PACKAGING.
4. PRELIMINARY PART. NOT RELEASED FOR PRODUCTION.

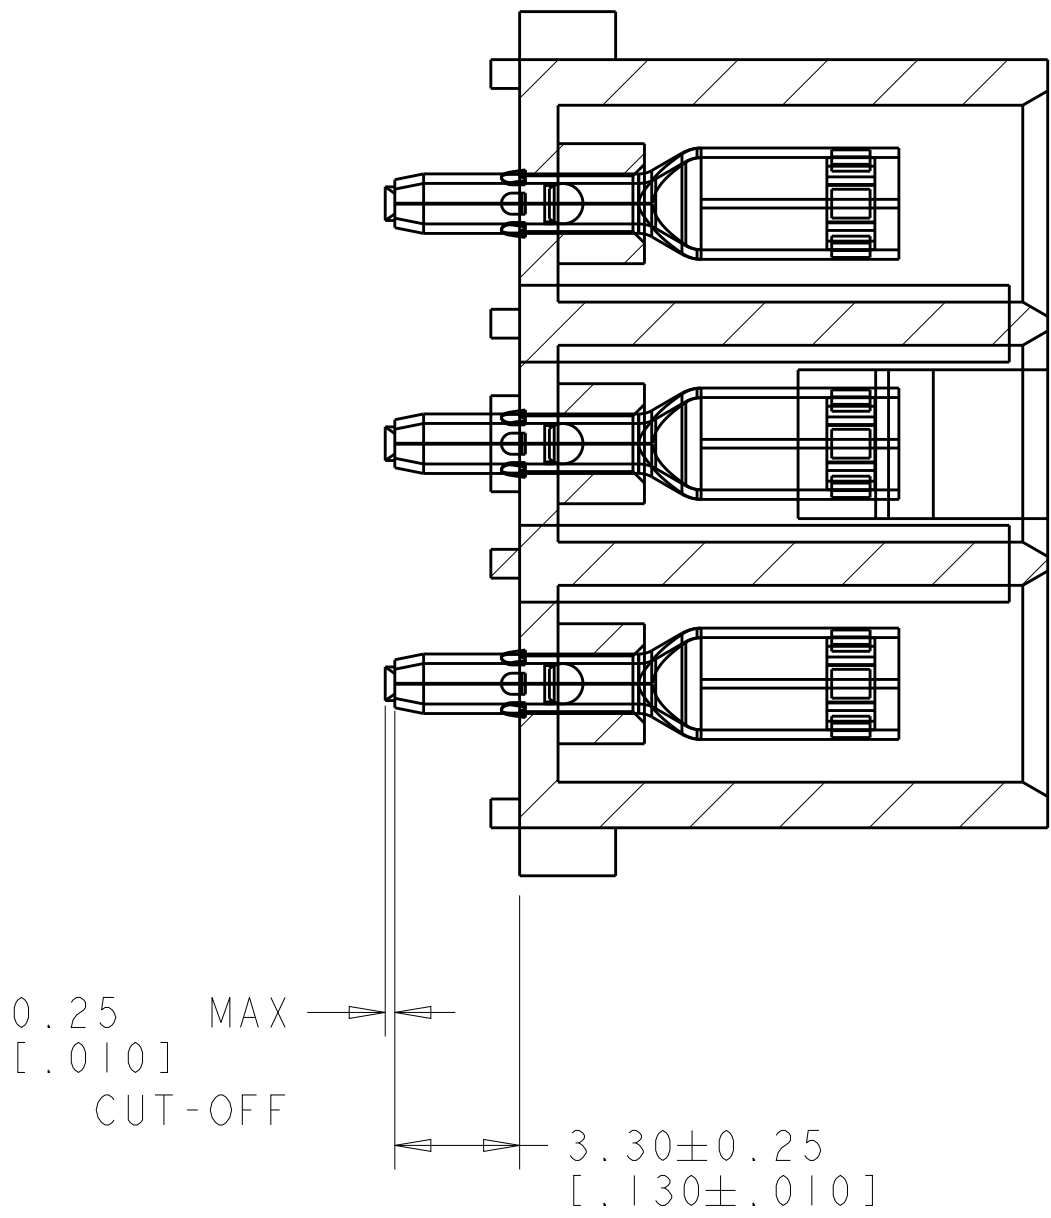



3 DIMENSIONAL MODEL  
SCALE 4:1

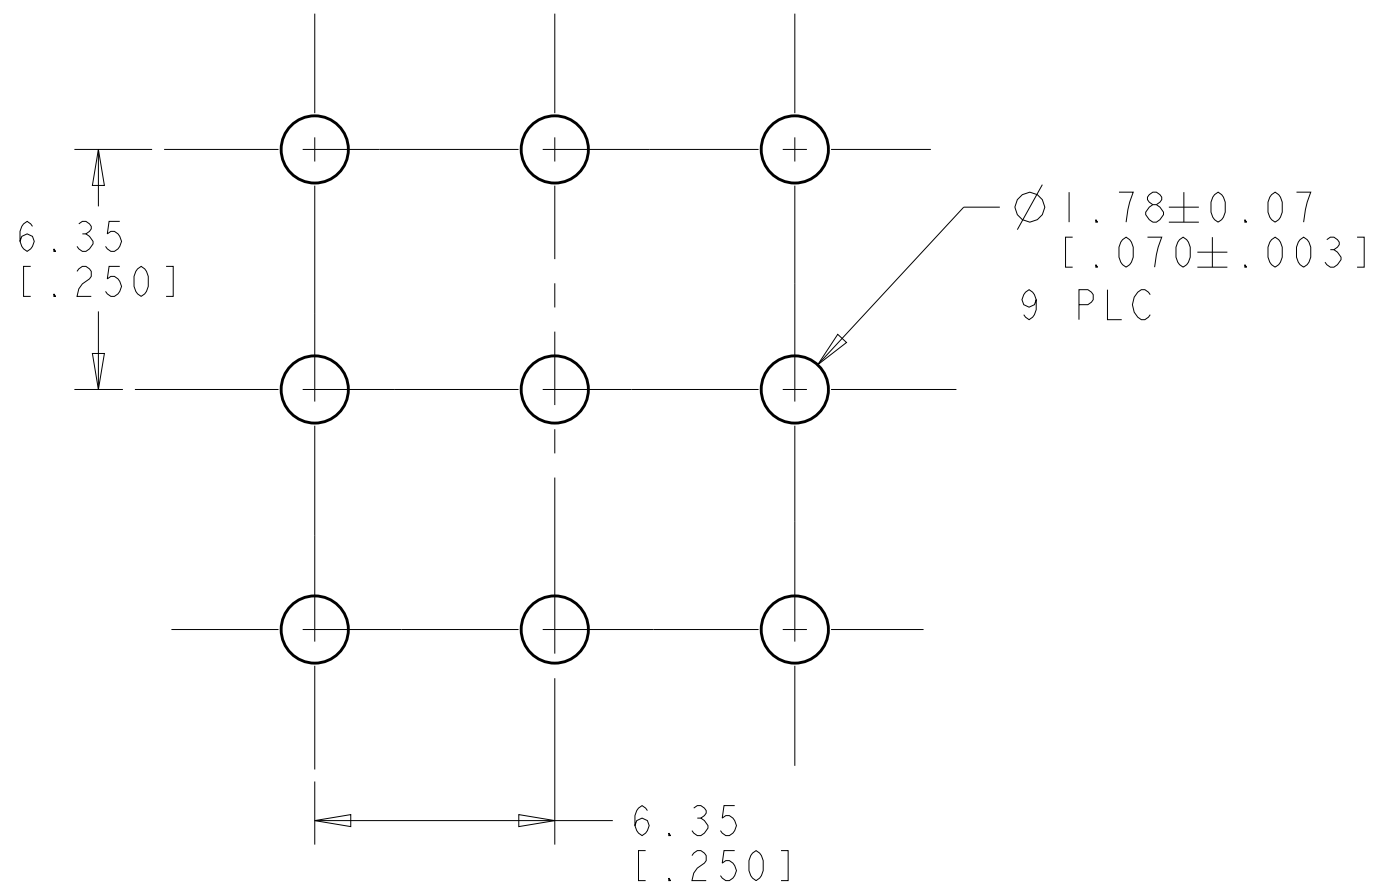

REMARKS	3. PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-2, NATURAL	5-2029002-1
	PHOSPOR BRONZE, PRE-TIN	NYLON, UL94V-2, NATURAL	2029002-1
	PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL AND COLOR	PART NUMBER

RECOMMENDED MOUNTING HOLE PATTERN  
FOR 1.57 [0.062] THICK P.C. BOARD

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. WHITAKER 26SEP2007	 TE Connectivity			
DIMENSIONS: mm[INCHES]		CHK D. COLEY 26SEP2007				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	SOCKET HEADER ASSEMBLY, 9 CIRCUIT, SHORT TAIL UNIVERSAL MATE-N-LOK(TM)		
	0 PLC	±				PRODUCT SPEC
	1 PLC	±				
	2 PLC	±0.13[.005]				
	3 PLC	±				
4 PLC	±	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
ANGLES	#0°30'					
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT -	A1	C=2029002	-	
CUSTOMER DRAWING		SCALE 5:1		SHEET 1	OF 1	REV A2