




## BAG, LOW CHARGING PINK POLY

Transparent light pink, low density polyethylene bags have low charging (antistatic) properties.

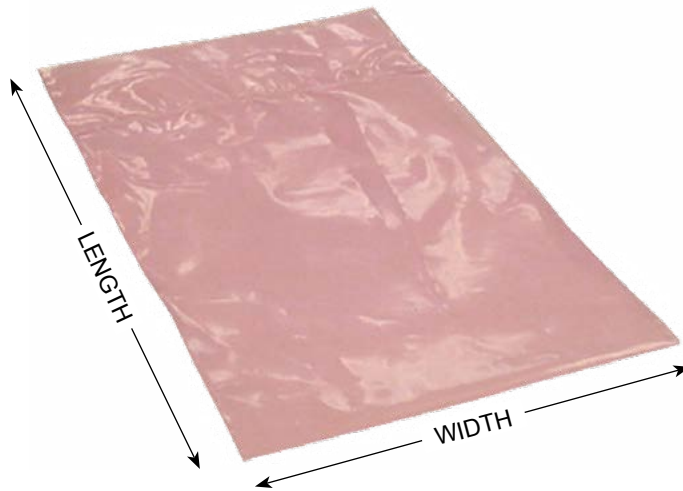

### Specifications:

#### Electrical Properties

Electrical Properties	Typical Value
Static Decay:	< 1.0 sec.
Surface Resistance:	1 x 10 <sup>9</sup> to < 1 x 10 <sup>13</sup> ohms
Polycarbonate Haze:	NE
Corrosivity Observations:	NE

#### Test Procedures/Method

ASTM 101 Method 4046  
ANSI/ESD STM11.11  
72 hr contact  
MIL-STD-3010, M3005

#### Physical Properties

Physical Properties	Typical Value	Test Procedures/Method
Material Thickness:	4.0mils (0.004", 0.1016mm), +/- 10%	
Melt Index:	0.050 gm/ 10 min	ASTM D-1283
Density:	0.923 gm/cc	ASTM D-1505
Dart Impact:	230 gms	ASTM D-1709
Coefficient of Friction:	MD 24,000 psi	ASTM D-1894 (unmodified film)
1% Secant Modulus (Stiffness):	MD 25,000 psi	ASTM D-882

*\*Pink Poly bags should be used within a timely manner and should not be reused as the ESD properties will negate over time\**

Item No.	Size W x L
49100	2" x 3"
49101	3" x 4"
49102	3" x 5"
49103	4" x 6"
49106	6" x 8"
49108	6" x 10"
49109	8" x 10"
49110	8" x 12"
49111	10" x 12"
49112	10" x 14"
49114	12" x 16"
49116	15" x 18"
49119	18" x 24"
Packaged 100 per pack	

#### RoHS, REACH and Conflict Minerals Statement

See the Desco Industries RoHS, Reach and Conflict Minerals Statement:  
[Descoindustries.com/ROHS3.aspx](http://Descoindustries.com/ROHS3.aspx)

See the Protektive Pak Limited Warranty:

[Protektivepak.Descoindustries.com/Limited-Warranty.aspx](http://Protektivepak.Descoindustries.com/Limited-Warranty.aspx)



Made in the United States of America

Specifications are subject to change without notice.

## TRANSPARENT LOW CHARGING (PINK POLY) BAGS

**PROTEKTIVE PAK**  
13520 MONTE VISTA AVENUE, CHINO, CA 91710  
PHONE (909) 627-2578  
[ProtektivePak.com](http://ProtektivePak.com)

DRAWING NUMBER  
49100

DATE  
February  
2019

Dimensional tolerances unless otherwise specified:  
L: +/- 0.250" / W: +/- 0.250"

# PROTEKTIVE PAK