

## Cable duct - CD-HF 30X40 - 3240344

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Cable duct, light gray, halogen-free, consisting of upper part and mounting base, width: 30 mm, height: 40 mm, length: 2000 mm

The illustration shows the version in gray

### Product Features

- Predetermined breaking point enables tool-free, burr-free removal of bars
- Fast and seamless creation of T and cross connections by means of an additional predetermined breaking point in the cable duct base
- The wide, diagonal heads of the cable duct bars make it easy to fit the cover and hold it securely in place
- Installed conductors are securely held in place by means of wire retaining clips that can be snapped onto bars on the side
- Cover is securely held in place for both horizontal and vertical mounting



### Key Commercial Data

|                        |          |
|------------------------|----------|
| Packing unit           | 1 pc     |
| Minimum order quantity | 20 pc    |
| Custom tariff number   | 39259020 |
| Country of origin      | Germany  |

### Technical data

#### Dimensions

|            |         |
|------------|---------|
| Length (b) | 2000 mm |
| Width (a)  | 30 mm   |
| Height     | 40 mm   |

#### Ambient conditions

|                                 |                  |
|---------------------------------|------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C |
|---------------------------------|------------------|

#### General

|       |            |
|-------|------------|
| Color | light gray |
|-------|------------|

## Cable duct - CD-HF 30X40 - 3240344

### Technical data

#### General

|                                        |              |
|----------------------------------------|--------------|
| Components                             | Halogen-free |
| Flammability rating according to UL 94 | V0           |
| Material                               | PC/ABS       |

#### Standards and Regulations

|                                        |     |
|----------------------------------------|-----|
| Halogen-free                           | yes |
| Connection in acc. with standard       | CSA |
| Flammability rating according to UL 94 | V0  |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140602 |
| eCl@ss 4.1 | 27140602 |
| eCl@ss 5.0 | 27140602 |
| eCl@ss 5.1 | 27140602 |
| eCl@ss 6.0 | 27400703 |
| eCl@ss 7.0 | 27400703 |
| eCl@ss 8.0 | 27400703 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000012 |
| ETIM 3.0 | EC000012 |
| ETIM 4.0 | EC000012 |
| ETIM 5.0 | EC000012 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30101815 |
| UNSPSC 7.0901 | 30101815 |
| UNSPSC 11     | 30101815 |
| UNSPSC 12.01  | 30101815 |
| UNSPSC 13.2   | 30101815 |

### Approvals

#### Approvals

---

## Cable duct - CD-HF 30X40 - 3240344

### Approvals

#### Approvals

CSA / UL Recognized / VDE Zeichengenehmigung

---

#### Ex Approvals

---

#### Approvals submitted

---

### Approval details

CSA 

UL Recognized 

VDE Zeichengenehmigung 

### Accessories

#### Accessories

##### Cover

Cover profile - CD-HF COVER 30 - 3240370



Cover for cable duct, light gray, halogen-free, width: 30 mm, length: 2000 mm

---

#### Filler plug

## Cable duct - CD-HF 30X40 - 3240344

### Accessories

Fastening clip - RVT-PA 4 - 3240498



Plastic body-bound rivet, for hole diameter of 4 mm and a material thickness of 1.5 ... 6 mm

---

Fastening clip - RVT-PA 6 - 3240499



Plastic body-bound rivet, for hole diameter of 6 mm and a material thickness of 1.5 ... 6 mm

---

### Riveting tools

Tool - UNIFOX-RVT P 4 - 1212478



Rivet setting tool, for use with RVT-PA 4 plastic body-bound rivets

---

Tool - UNIFOX-RVT P 6 - 1212509




Rivet setting tool, for use with RVT-PA 6 plastic body-bound rivets

---

### Drawings

## Cable duct - CD-HF 30X40 - 3240344

Dimensional drawing

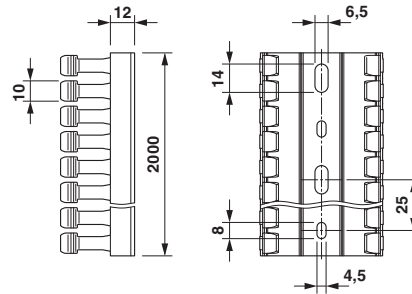

Base perforation according to DIN EN 50085

---

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>