

Printed-circuit board connector - MSTBA 2,5/ 2-G-5,08 GY7038AU - 1702724

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB headers, nominal current: 12 A, number of positions: 2, pitch: 5.08 mm, color: Agate gray, contact surface: Gold, mounting: Wave soldering



The figure shows the 10-position version

Your advantages

- Gold-plated contacts ensure transfer quality remains stable over the long term
- Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- Well-known mounting principle allows worldwide use
- Plug-in direction parallel to the PCB
- Closed contour for optimum stability of the plug-in connection

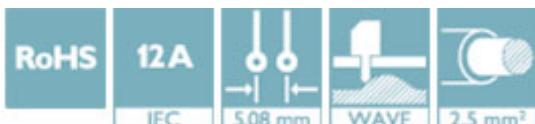

Key Commercial Data

Packing unit	50 pc
GTIN	 4 046356 610070
GTIN	4046356610070

Technical data

Dimensions

Pitch	5.08 mm
Dimension a	5.08 mm
Height	9 mm
Length of the solder pin	3.5 mm

General

Range of articles	MSTBA 2,5/..-G
Rated voltage (III/3)	250 V
Connection in acc. with standard	EN-VDE

Printed-circuit board connector - MSTBA 2,5/ 2-G-5,08 GY7038AU - 1702724

Technical data

General

Nominal current I_N	12 A
Color	Agate gray
Number of positions	2

Standards and Regulations

Connection in acc. with standard	EN-VDE
----------------------------------	--------

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC



B.01742

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>