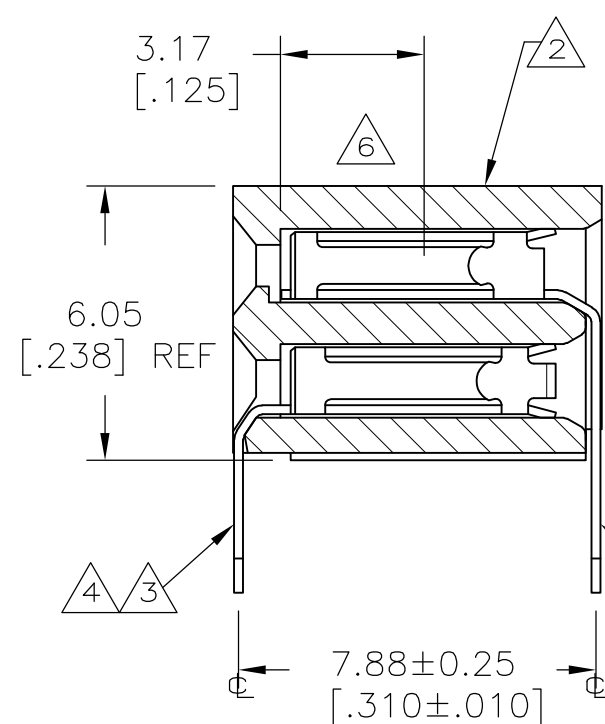



[illegible]

OBSELETE	34.49 [1.358] 39.57 [1.558] 62.43 [2.458]	10	22	3-532956-0
OBSELETE		12	26	2-532956-9 
OBSELETE				2-532956-7
OBSELETE				2-532956-6
OBSELETE	24.33 [.958]	6	14	2-532956-5
OBSELETE	235.15 [9.258]	89	180	2-532956-4
	260.55 [10.258]	99	200	2-532956-3
OBSELETE	194.51 [7.658]	73	148	2-532956-2
OBSELETE	184.35 [7.258]	69	140	2-532956-1
	171.65 [6.758]	64	130	2-532956-0
OBSELETE	169.11 [6.658]	63	128	1-532956-9
	158.95 [6.258]	59	120	1-532956-8
	146.25 [5.758]	54	110	1-532956-7
	133.55 [5.258]	49	100	1-532956-6
	128.47 [5.058]	47	96	1-532956-5
 OBSELETE	120.85 [4.758]	44	90	1-532956-4
	113.23 [4.558]	42	86	1-532956-3
	108.15 [4.258]	39	80	1-532956-2
 OBSELETE	97.99 [3.858]	35	72	1-532956-1
	95.45 [3.758]	34	70	1-532956-0
	82.75 [3.258]	29	60	532956-9
	70.05 [2.758]	24	50	532956-8
	57.35 [2.258]	19	40	532956-7
	52.27 [2.058]	17	36	532956-6
	44.65 [1.758]	14	30	532956-5
	37.03 [1.458]	11	24	532956-4
	31.95 [1.258]	9	20	532956-3
	26.87 [1.058]	7	16	532956-2
	21.79 [.858]	5	12	532956-1
	FINISH	B	A	NO OF POSN
				PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DRN 17JAN01 K.L.CLOUSER/UTA QAC 05/14/91 DOUG SARVER		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPRO 05/15/91 NAME		
		0 P/LC ± — 1 P/LC ± — 2 P/LC ± 0.13 [.005] 3 P/LC ± — 4 P/LC ± — ANGLES FINISH		DON FORKER PRODUCT SPEC		
		APPLICATION SPEC		RECEPTACLE ASSY, MOD II, DBL ROW, 2.54 x 2.54 [.100 x .100] CL, GUIDE PIN EARS, CLOSED ENTRY, SHORT-POINT-OF-CONTACT		
		WEIGHT —		SIZE A1 CAGE CODE C=532956 DRAWING NO —		
		CUSTOMER DRAWING		RESTRICTED TO —		
MATERIAL HOUSING: CONTACT: 3		SEE TABLE		SCALE 6:1 SHEET 1 OF 1 REV. AF		