REV.	DATE	DESCRIPTION
A	03/27/05	UPDATE PART DIMENSIONS / DRAWING FORMAT

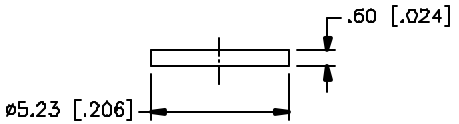

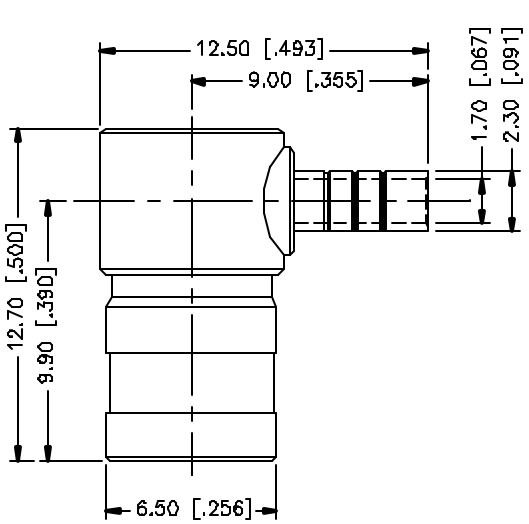

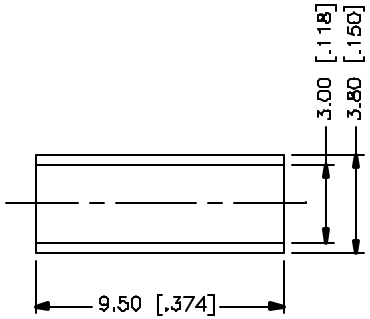

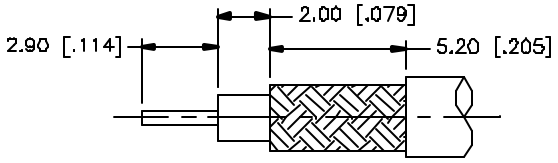

RECOMMENDED CABLE
STRIPPING DIMENSIONS

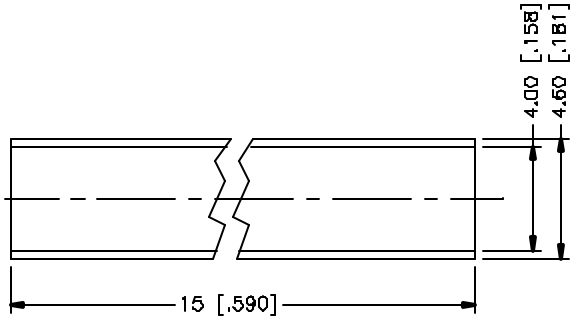

NOTE:
1. CRIMPED FERRULE
   HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7	HEAT SHRINK TUBE			1
6	COVER	BRASS	NICKEL	1
5	FERRULE	COPPER	NICKEL	1
4	CONTACT PIN	BER. COPPER	GOLD	1
3	INSULATOR	TEFLON	NATURAL	1
2	BODY	BRASS	NICKEL	1
1	HOUSING	DIE CAST	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS; DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 6mm ± 0.20mm
6 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	03/27/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/142/142193-75.DWG

Amphenol Connex

PART DESCRIPTION
SMB R/A CRIMP PLUG
(FOR RG-179/U CABLE)

PART NO. 142193-75

DWG. NO.	REV.	SIZE	SCALE
142193-75.DWG	A	A	NA