



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn98%, Cu2%	Yes	Yes

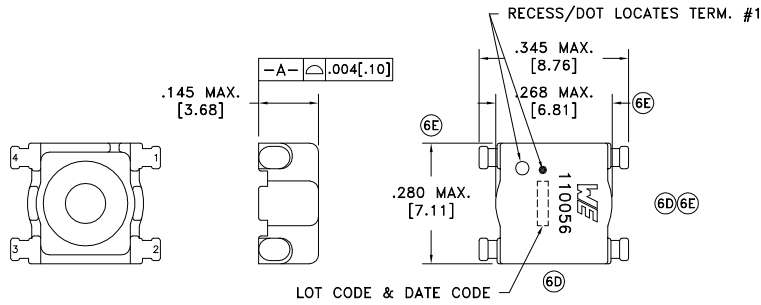

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
6E D.C. RESISTANCE 1-2	@20°C	0.35 ohms max.
6E D.C. RESISTANCE 4-3	@20°C	0.36 ohms max.
6E/6C INDUCTANCE 1-2	10kHz, 100mVAC, Ls	70uH min.
6E/6C INDUCTANCE 4-3	10kHz, 100mVAC, Ls	80uH min.
6E/6B DIELECTRIC 1-4	5000VDC, 1 second	-
6F TURNS RATIO	(4-3):(1-2)	1.08:1, ±1%

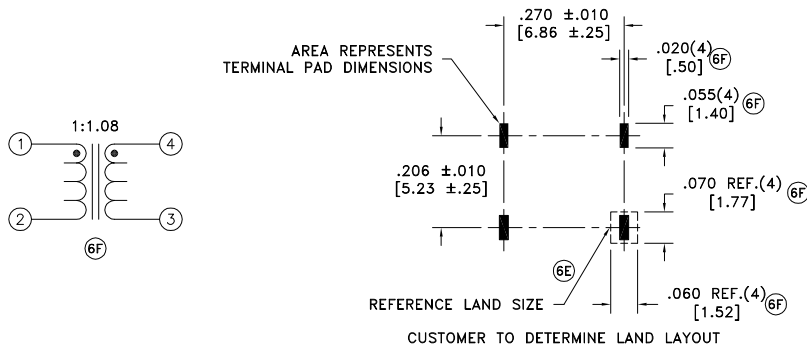

6B GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -20°C to +85°C.


STORAGE TEMPERATURE RANGE: -40°C to +105°C.

6F COPLANARITY: All 4 terminals must lie on a plane within .004 [.10] of Surface A after lead tinning.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications
6F	2/19	Method: Tape & Reel
6E	8/18	PKG-0548
6D	10/15	www.we-online.com/midcom
6C	2/11	SEE REVISION SHEET FOR REVISION LEVEL



Tolerances unless otherwise specified:
Angles: ±1°
Fractions: ±1/64
Decimals: ±.005 [.13]
Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE

TRANSFORMER

eiSos p/n: 750110056



PART NO.

750110056

SPECIFICATION SHEET 1 OF 1