
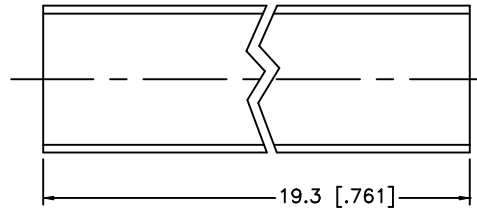
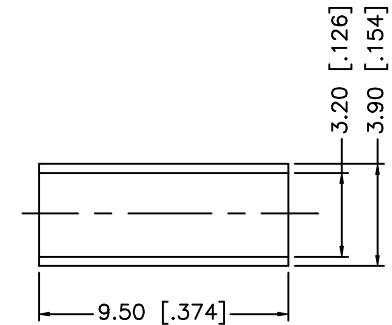


2.00 [.079] 2.70 [.106] 5.20 [.205]

RECOMMENDED
CABLE STRIPPING DIM'S



1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN SQ. CRIMP SIZE 0.7mm

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
8					DRAWN	G.R.S.	05/08/07									
7					CHECKED			PART DESCRIPTION SMB CRIMP JACK (FOR 174/U, 188A/U, 316/U CABLE)								
6					ISSUED											
5	HEAT SHRINK TUBE				SHEET	1 OF 1										
4	FERRULE	COPPER	GOLD		1			PART NO.		142189						
3	CONTACT PIN	BRASS	GOLD		1											
2	INSULATOR	TEFLON	NATURAL	1			DWG. NO.		142189.DWG		REV.	B	SIZE	A	SCALE	NA
1	BODY	BRASS	GOLD	1			CAD FILE		C:/142/142189.DWG							
	DESCRIPTION	MATERIAL	FINISH	QTY												