

Square Body – Accessories

Fuse Bases (Blocks)

DIN 43 653 Fuse Bases

For the Typower ZILOX fuses according to DIN 43 653, the following fuse bases are available:

| Part Number | Max. Voltage | Rated Current | Center Distance |
|-------------|--------------|---------------|-----------------|
| 170H3003 | 1000V | 630A | 80mm |
| 170H3004 | 1000V | 1250A | 80mm |
| 170H3005 | 1400V | 630A | 110mm |
| 170H3006 | 1400V | 1250A | 110mm |

The fuse bases rated 1250A can also be used for the fuses with higher rated current if the maximum load current is derated according to the table below:

| Fuse Rating | Max. Load Current In Fuse Base |
|-------------|--------------------------------|
| 1400A | 1325A |
| 1500A | 1400A |
| 1600A | 1500A |
| 1800A | 1650A |
| 2000A | 1800A |

| Fixed Center Base Style | Max. Voltage | Max. Fuse Current Rating | Fuse Size |
|-------------------------|--------------|--------------------------|-----------|
| 170H1007 | 1000V | 400A | 00, 000 |
| 170H1013 | 660V | 200A | 0000,000 |

U.L. Recognized to U.L. 512.

Universal Fuse Bases



For the Typower ZILOX fuses according to DIN 43 653, French style and North American style, the following fuse bases are available:

| Modular Base Style | Max. Voltage | Max. Fuse Current Rating | BIF Document |
|--------------------|--------------|--------------------------|--------------|
| 1BS101 | 600V | 100A | 1206 |
| 1BS102 | 600V | 400A | 1207 |
| 1BS103 | 600V | 400A | 1208 |
| 1BS104 | 600V | 600A | 1209 |
| BH-0xxx | 700V | 100A | 1200 |
| BH-1xxx | 2500V | 400A | 1201 |
| BH-2xxx | 5000V | 400A | 1202 |
| BH-3xxx | 1250V | 700A | 1203 |

Modular fuse bases are U.L. Recognized to U.L. 512 and meet the spacing requirements of U.L. 347. Contact Bussmann sales representative for more complete ordering information.

DIN 43 620 Fuse Bases

For fuse bases used with Typower ZILOX fuses according to DIN 43 620, please contact your local Bussmann sales representative.

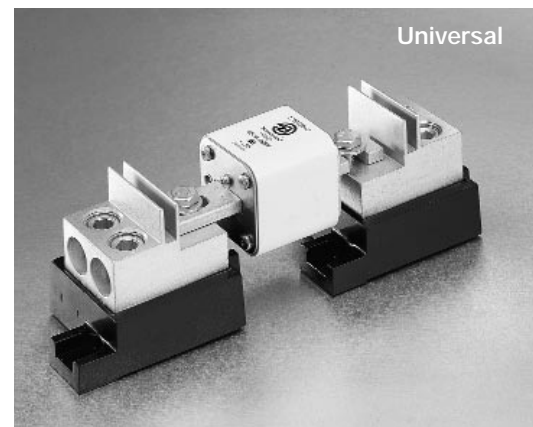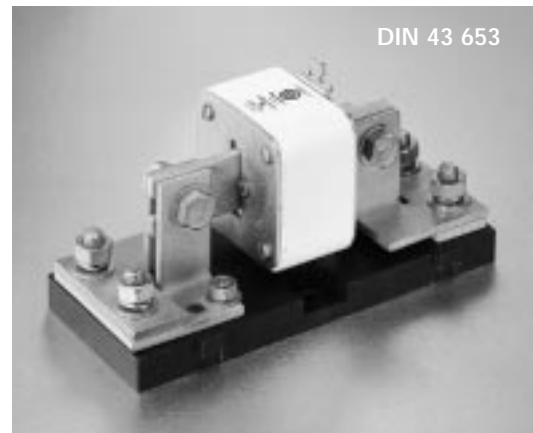

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.