

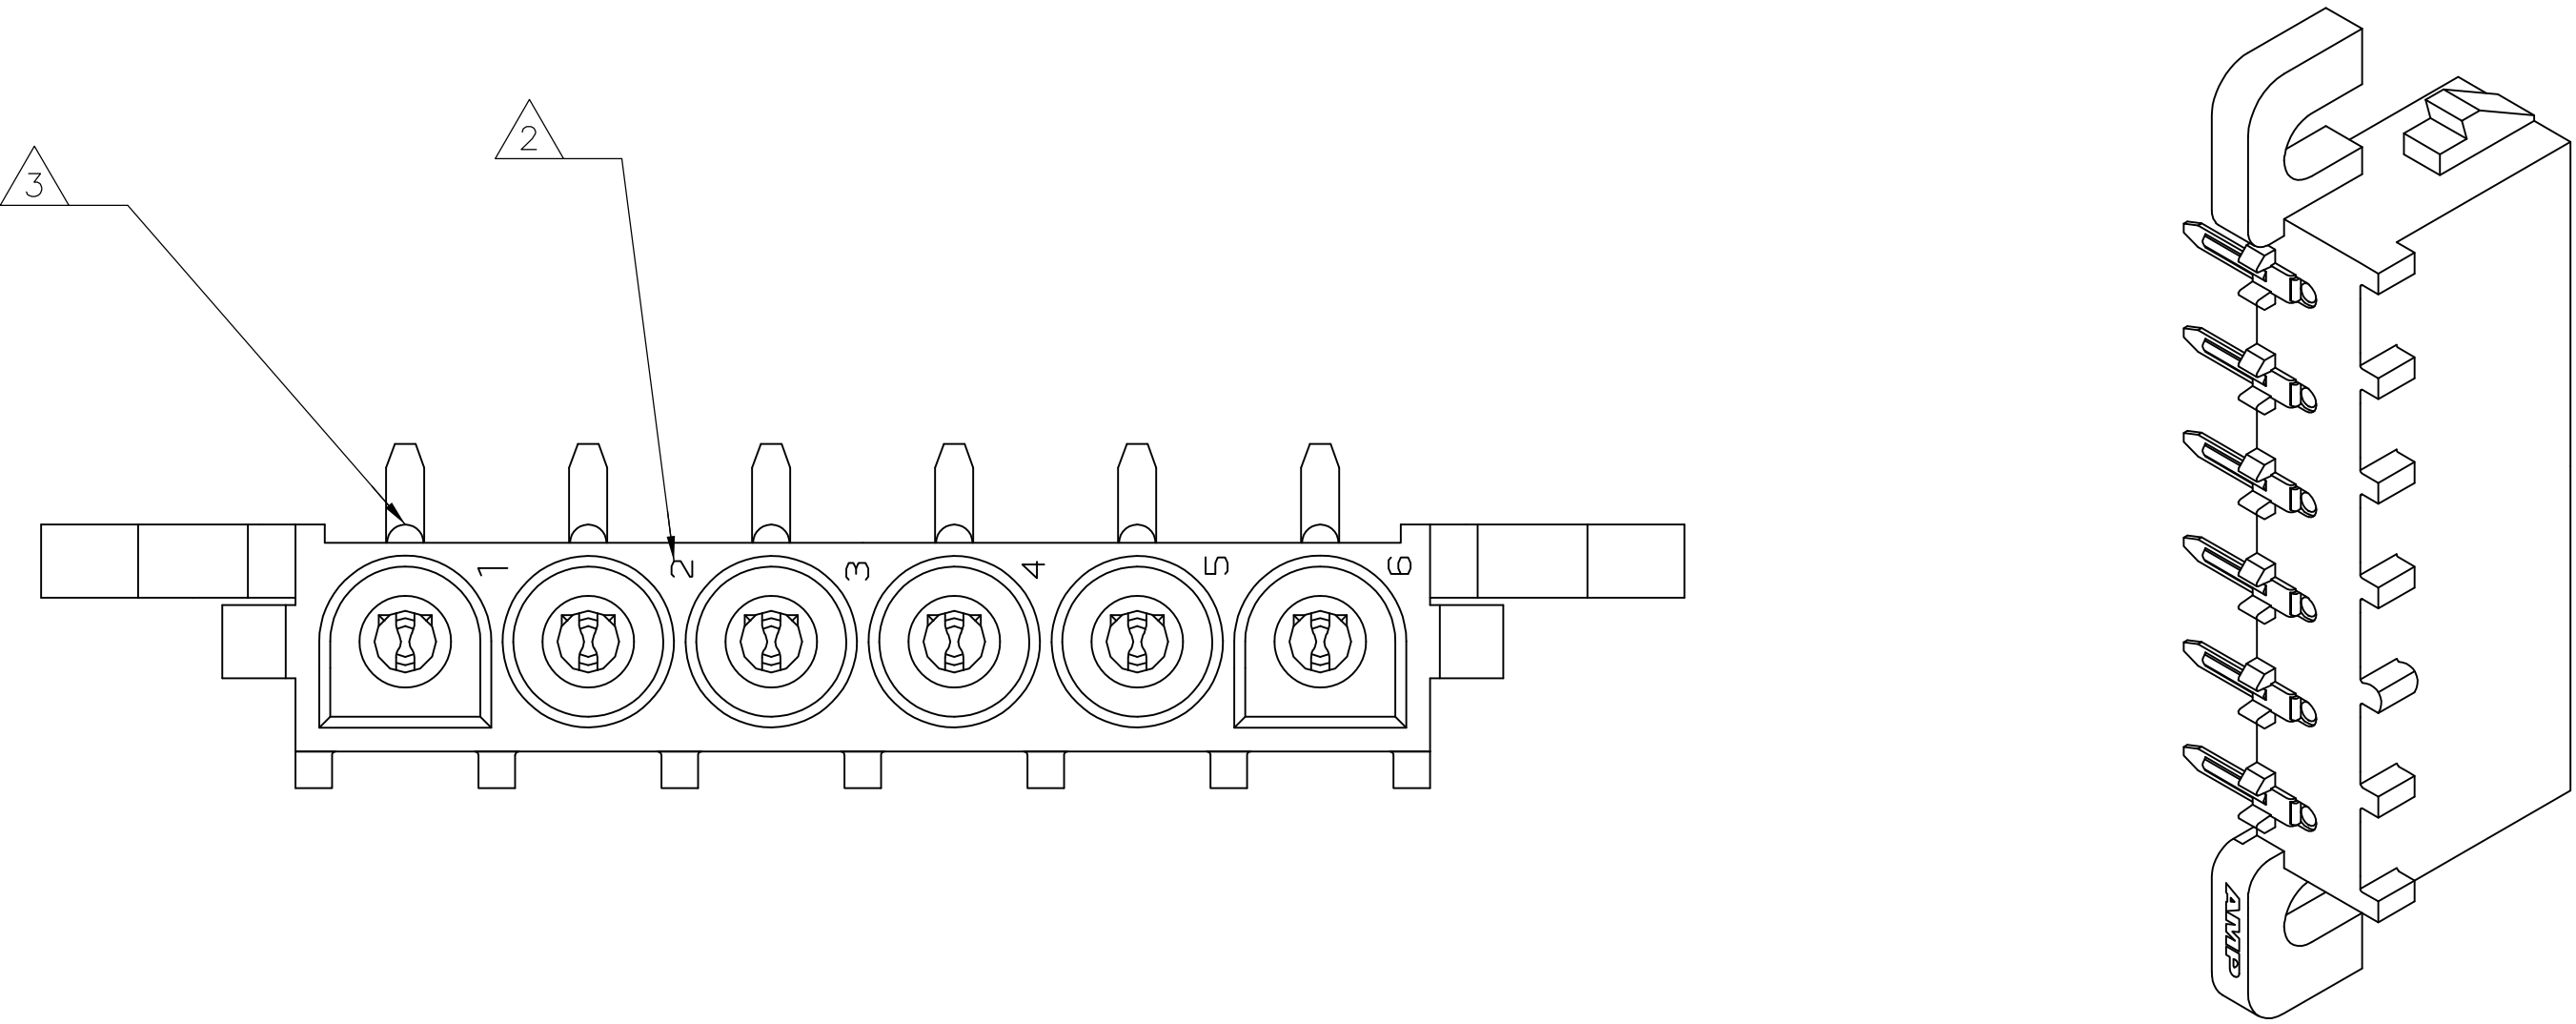
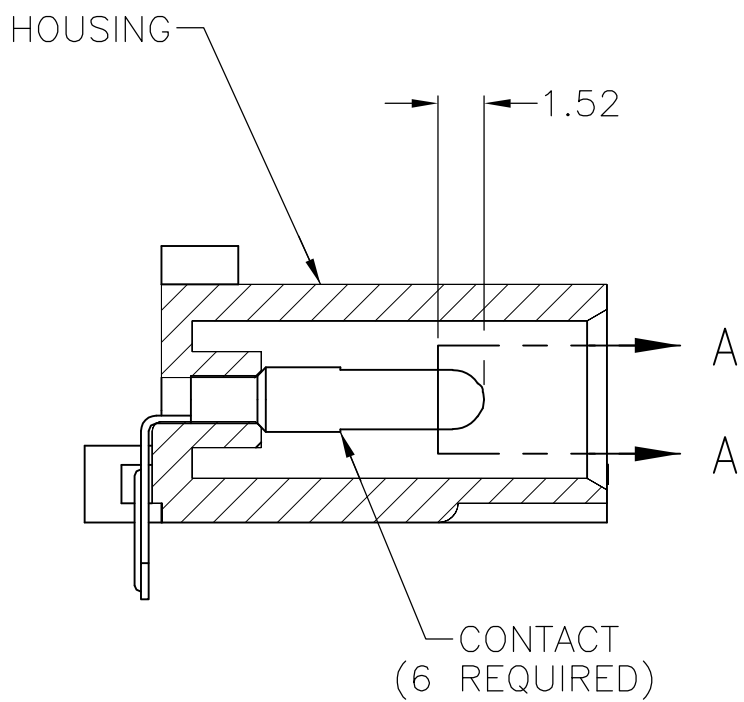


LOC	DIST	REVISIONS				
		REV	DATE	BY	APP'D	
CM	00	A	10MAR2016	BW	EW	


- 1 PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.
- 2 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES,BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 3 OPTIONAL CONSTRUCTION MAY DELETE THIS RIB.
- 4 FLAMMABILITY UL V-0 FOR THICKNESS 0.4, 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-11-10.
- 5 GLOW WIRE FLAMMABILITY (GWFI): 960°C FOR THICKNESS 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-2-12.
- 6 GLOW WIRE IGNITION (GWIT): 825°C FOR THICKNESS 0.45, 800°C FOR THICKNESS 0.8, 775°C FOR THICKNESS 1.6 AND 3.0 PER IEC 60695-2-13.

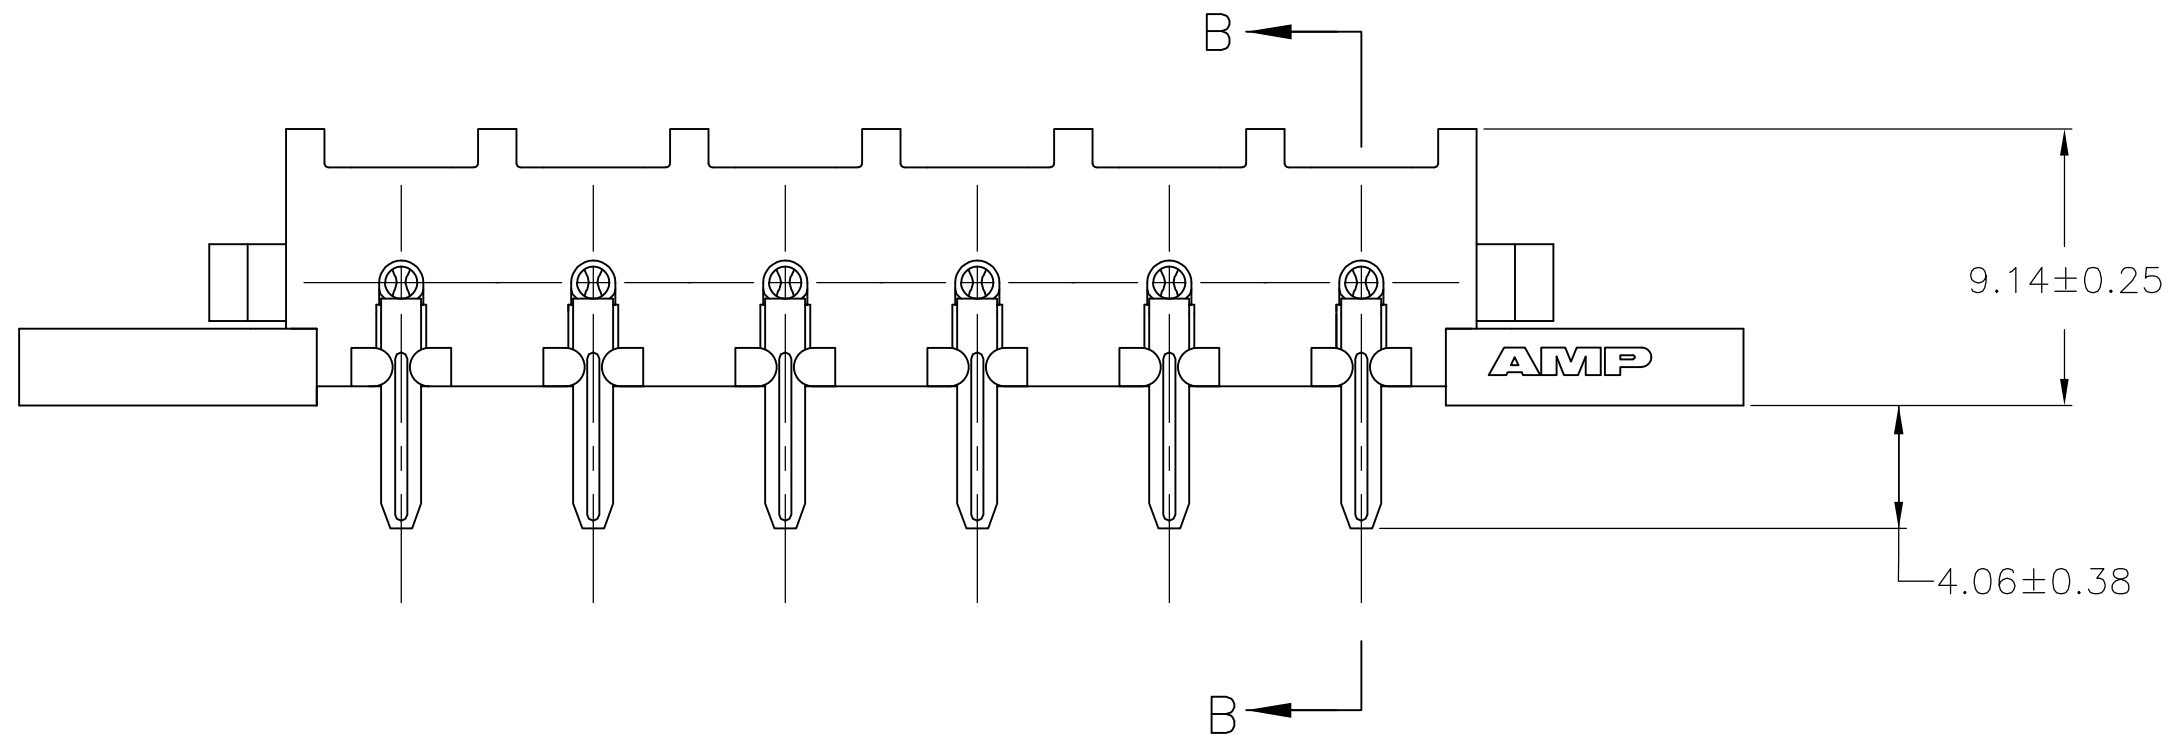


3-DIMENSIONAL MODEL
NTS

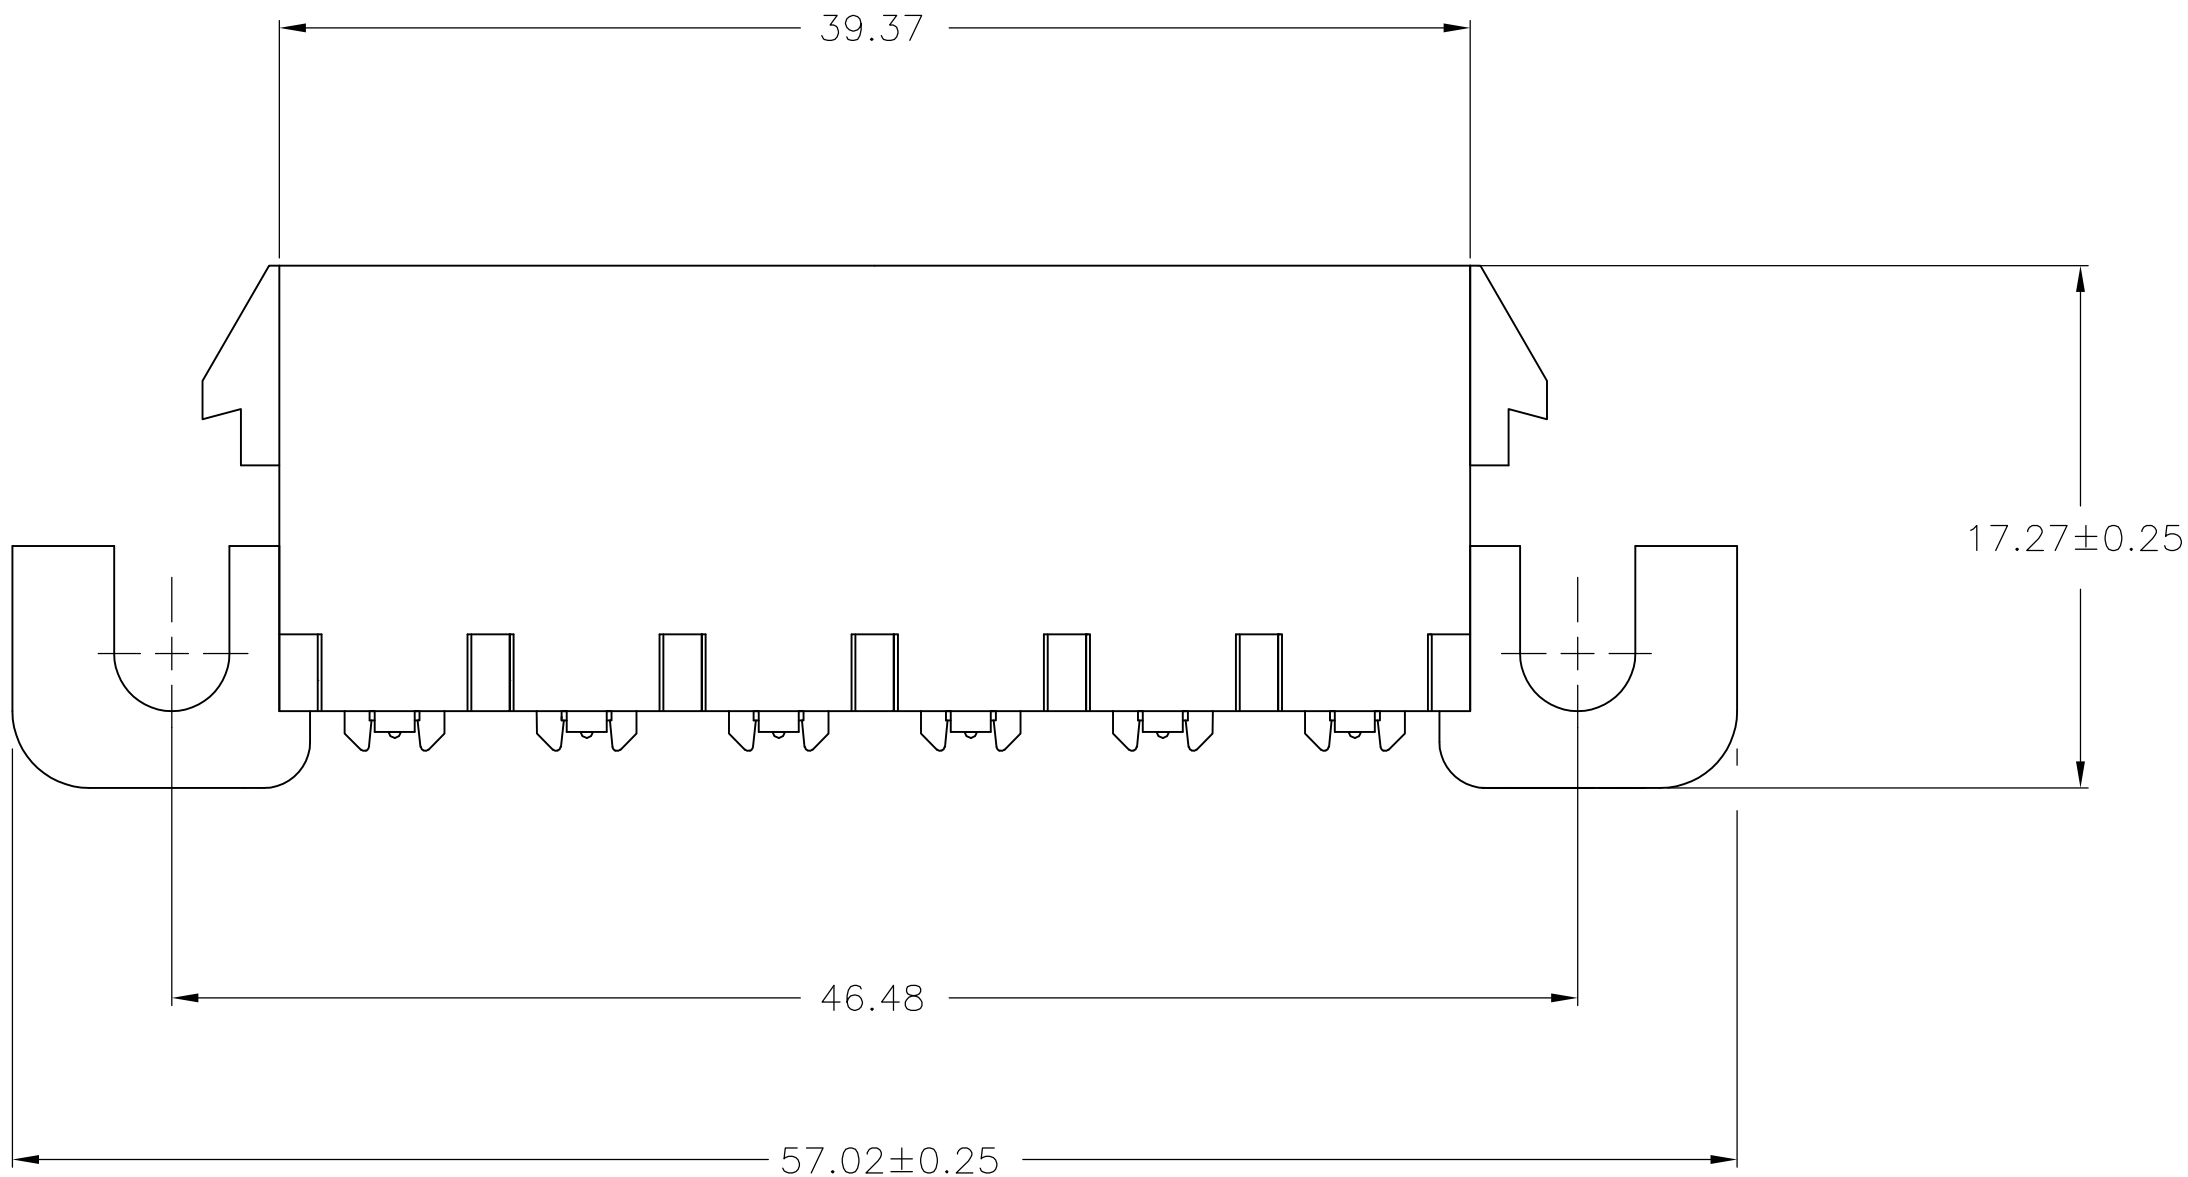

SECTION B-B

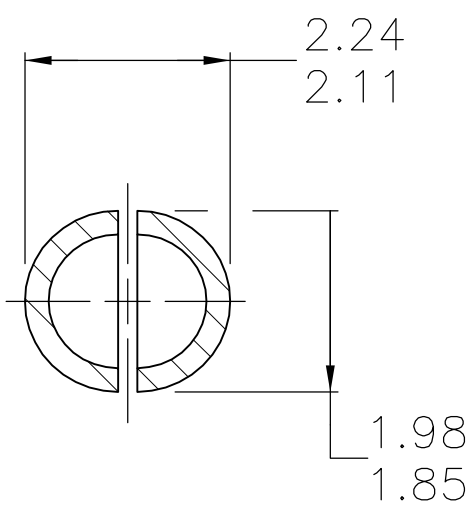

SECTION A-A
SCALE 10:1

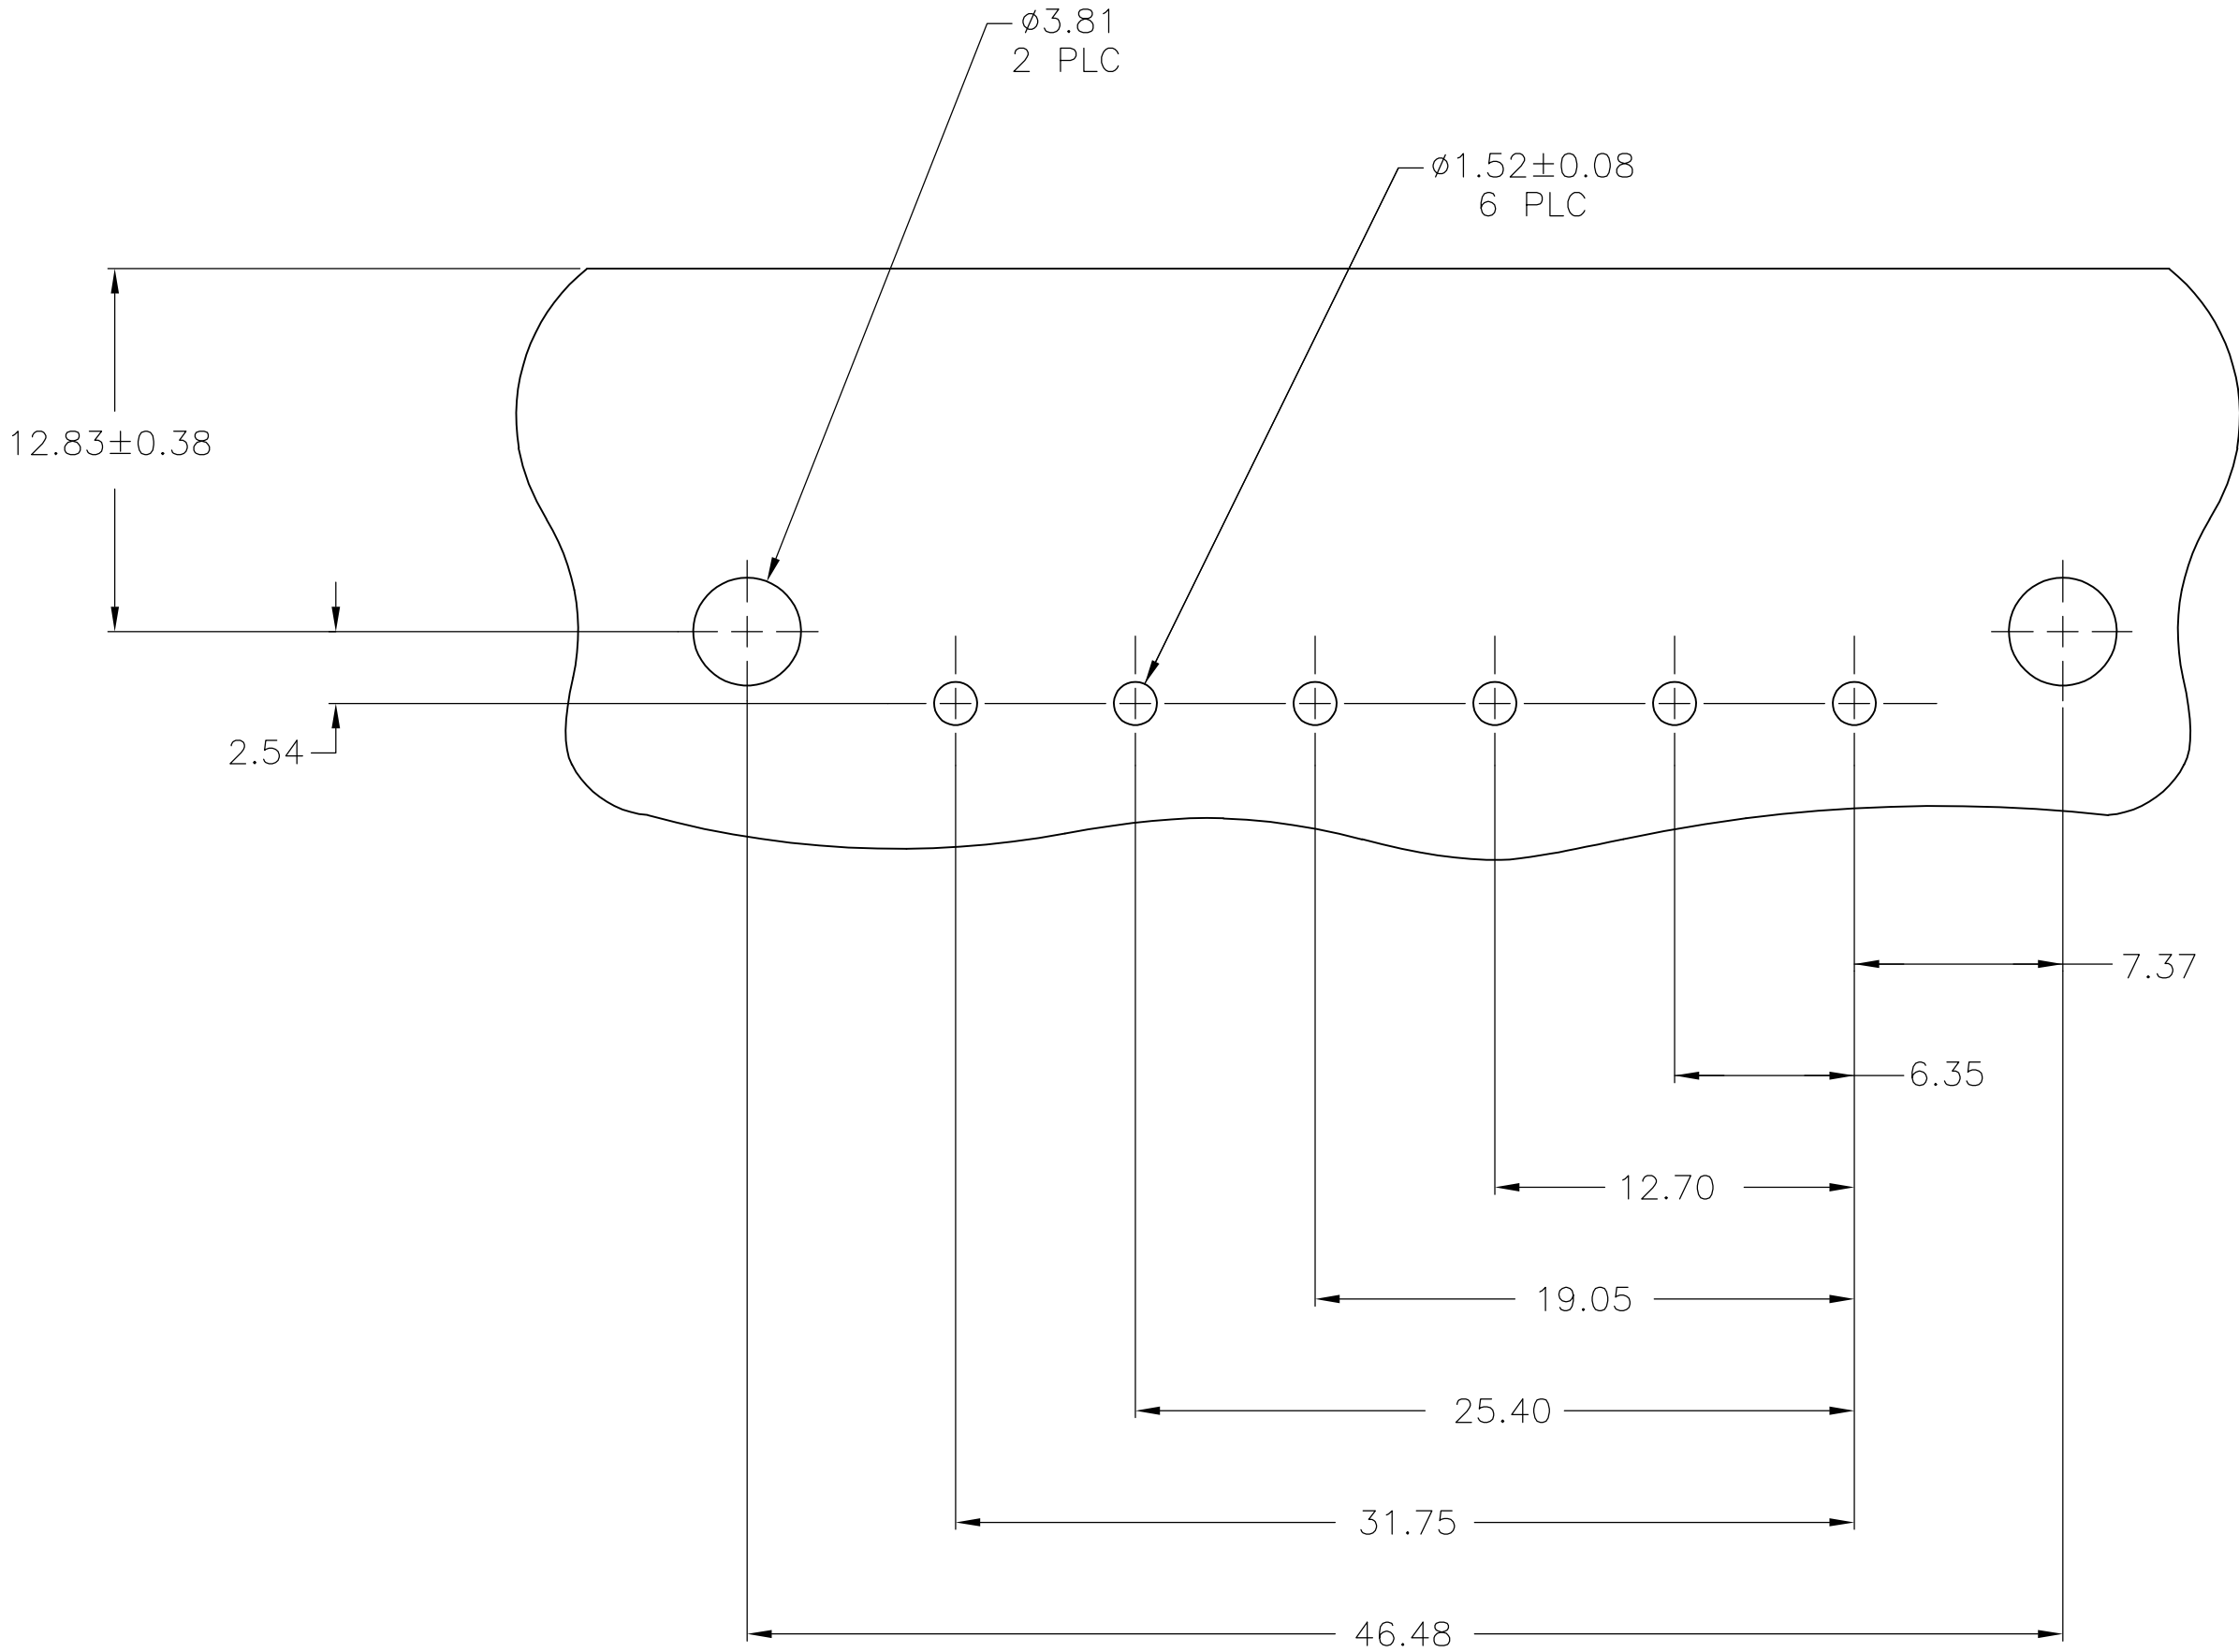

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

1.98	.078	9.14	.360	—	—
1.85	.073	7.37	.290	57.02	2.245
1.57	.062	6.35	.250	46.48	1.830
1.52	.060	4.57	.180	39.37	1.550
0.38	.015	4.06	.160	31.75	1.250
0.25	.010	3.81	.150	25.40	1.000
0.13	.005	2.54	.100	19.05	.750
0.08	.003	2.29	.090	17.27	.680
.00127	.000050	2.24	.088	12.83	.505
.00076	.000030	2.11	.083	12.70	.500
MM	IN	MM	IN	MM	IN

CONVERSION TABLE

PH BRZ TIN NYLON, UL V-0 GW	1969812-1
CONTACT	PART NO

TE TE Connectivity

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BASVESH WARAD 25JAN2016	NAME	
DIMENSIONS: mm		CHK WICKES EVAN 25JAN2016	PRODUCT SPEC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD WICKES EVAN 25JAN2016	APPLICATION SPEC	
MATERIAL SEE TABLE		WEIGHT —	RESTRICTED TO	
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 1	