
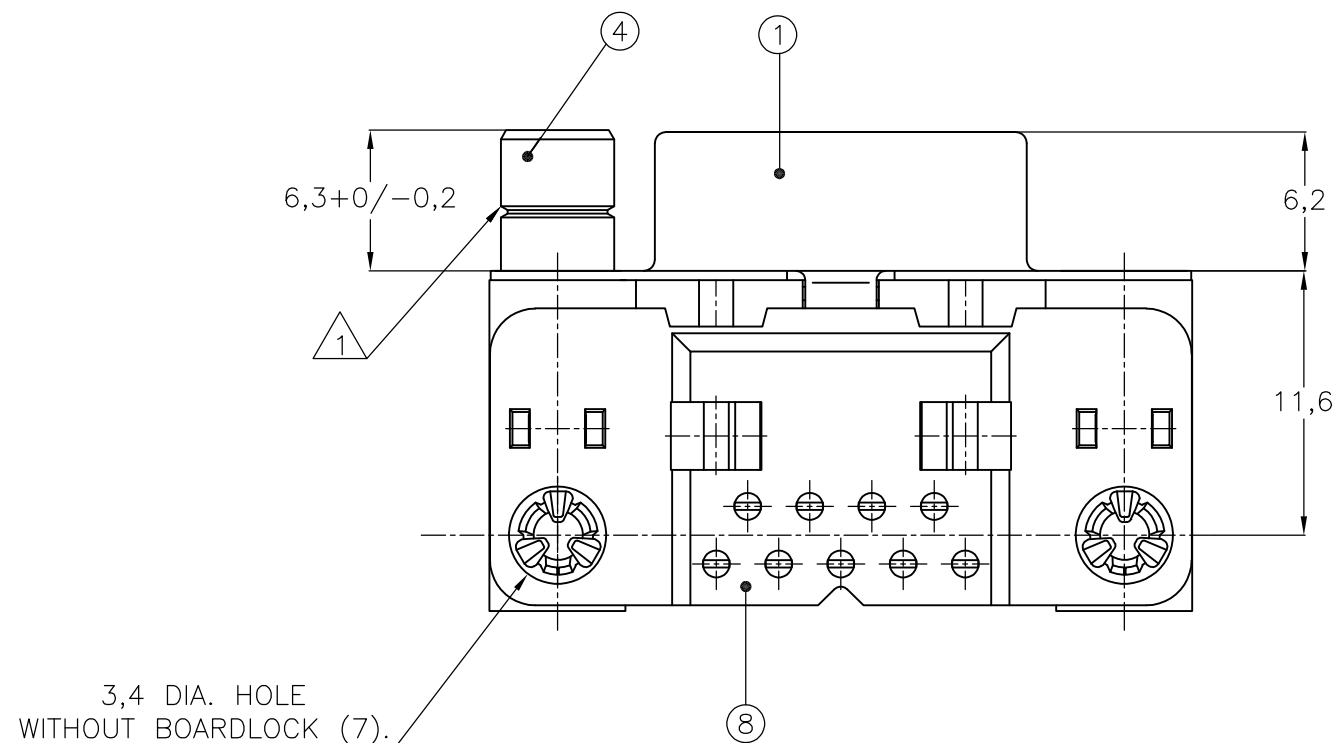
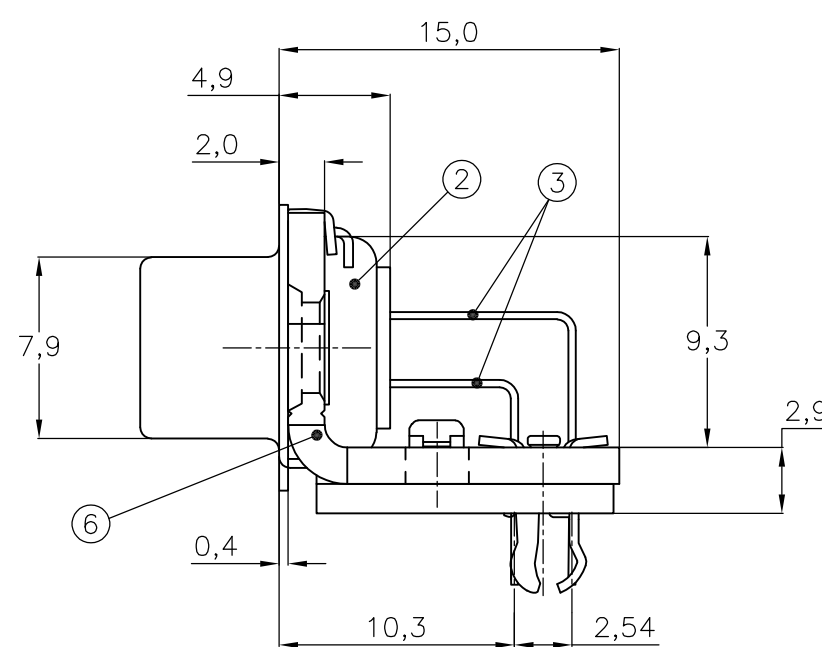
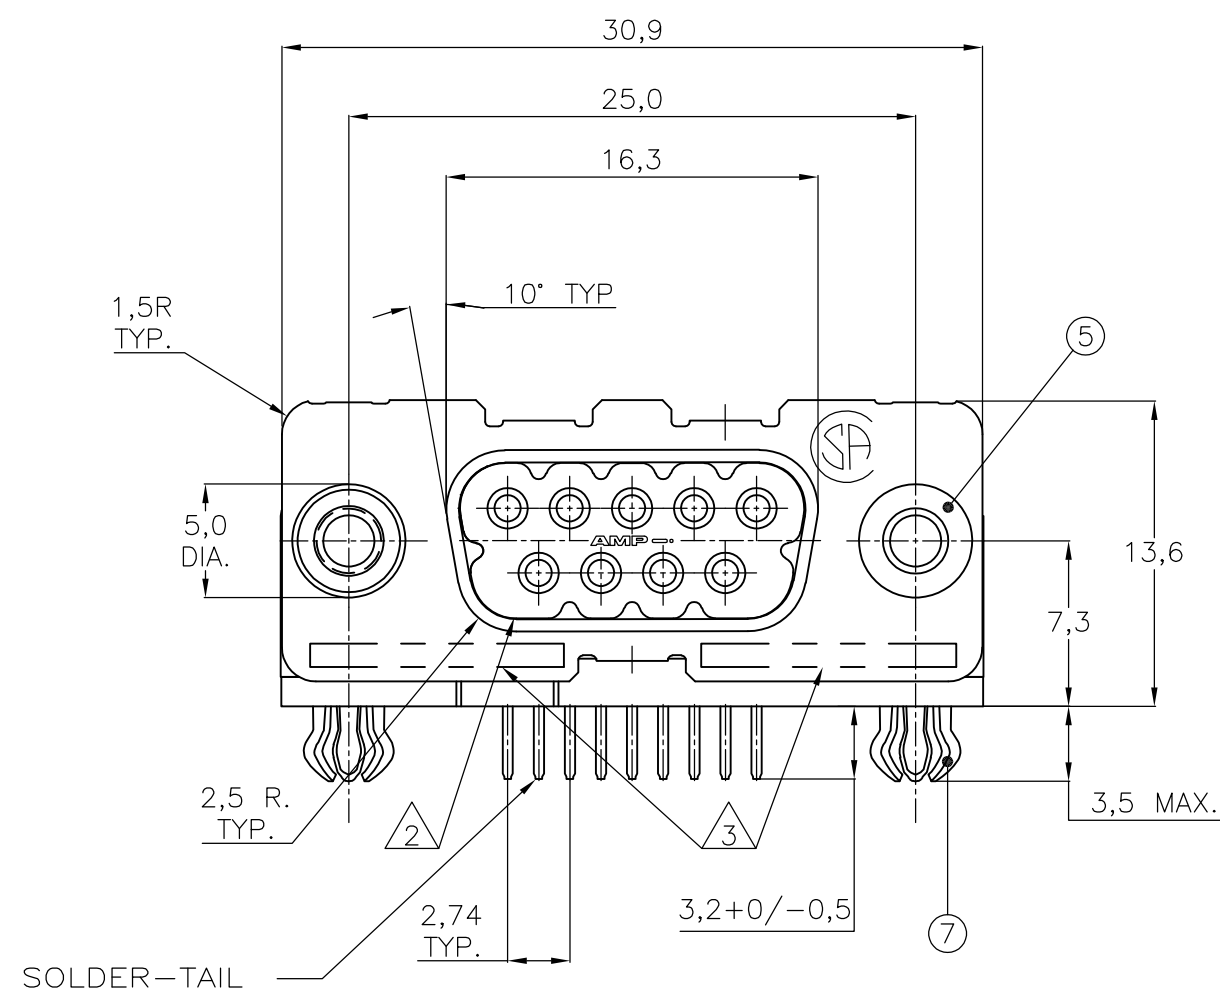


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			M	REVISED PER ECO-15-004948	27APR2015	AP	SB

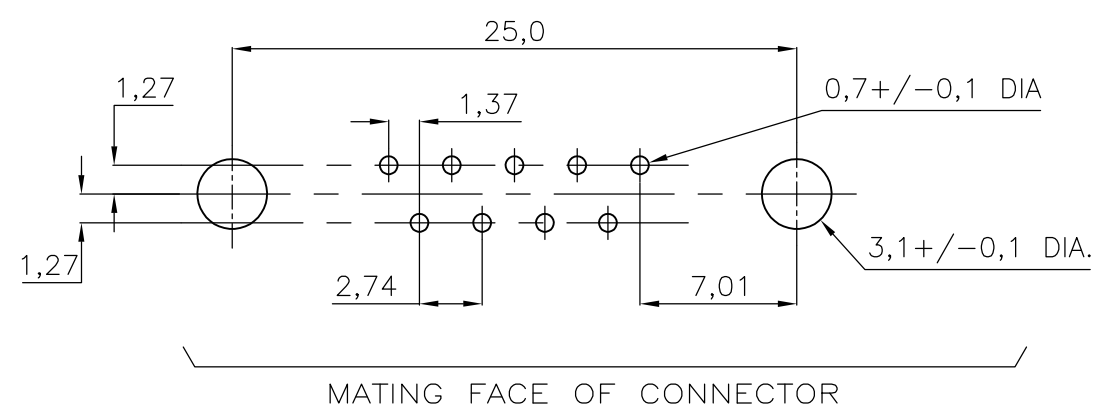

RECOMMENDED P.C. BOARD HOLE-LAYOUT

[illegible]

- ① GROOVE INDICATES VERSION WITH 4-40 UNC INNER THREAD;
WITHOUT GROOVE INDICATES VERSION WITH M3 INNER THREAD.
- ② CAVITY IDENTIFICATION AT FRONT SIDE ONLY.
- ③ PART NUMBER AND DATE CODE.

4. AIR AND CREEPAGE DISTANCES ACCORDING TO DIN 41652.

- △5 CONTACT FINISH: GOLD FLASH OVER PALLADIUM NICKEL PLATE OR GOLD PLATE ON MATING SURFACES, TIN PLATE ON THE SOLDER-TAILS, NICKEL UNDERPLATE ON THE ENTIRE CONTACT. MATING SURFACE FINISH MEETS PERFORMANCE LEVEL 2 PER DIN 41652.

ITEM NO./MATERIAL :

- | | | |
|------------------------|---|---|
| ① SHELL | : | BRIGHT TIN PLATED STEEL |
| ② HOUSING | : | GLASS FILLED POLYESTER,
COLOR : BLACK |
| ③ CONTACTS | : | PHOSPHOR BRONZE
(PLATING : SEE NOTES ABOVE) |
| ④ FEMALE SCREWLOCK | : | TIN PLATED STEEL
(INNER THREAD 4-40 UNC OR M3) |
| ⑤ BUSHING | : | TIN PLATED STEEL (INNER THREAD 4-40
UNC OR M3 OR 3,1 DIA THROUGH-HOLE) |
| ⑥ BRACKET | : | TIN PLATED STEEL |
| ⑦ BOARDLOCK | : | TIN PLATED PHOSPHOR BRONZE |
| ⑧ POST ALIGNMENT PLATE | : | GLASS FILLED NYLON
COLOR : BLACK |

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN D. KESSLER CHK W. SOOMERS APVD		14JAN99 — —		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC ± — 1 PLC ± 0.3 2 PLC ± 0.15 3 PLC ± — 4 PLC ± — ANGLES ± 2°		PRODUCT SPEC —			
MATERIAL —		FINISH —		APPLICATION SPEC —		RESTRICTED TO —	
				WEIGHT —		SIZE A2	
				CAGE CODE 00779		DRAWING NO C-106505	
CUSTOMER DRAWING						SCALE NTS	
						SHEET 1 of 1	
						REV M	